

## GaAs DOUBLE-BALANCED MIXER

## MM1-2567LS

The MM1-2567LS is a passive GaAs double balanced MMIC mixer suitable for both up and down-conversion applications. As with all Marki Microwave mixers, it features excellent conversion loss, isolation and spurious performance across a broad bandwidth and in a small form factor. The MM1-2567LS is available in a connectorized package. Owing to its passive balun circuitry, the mixer can be used in two different configurations: Configuration A for highest efficiency and Configuration B for the best spurious performance and lowest LO drive. Refer to page 2 for more information on the operating configurations.



### Features

- Connectorized Package
- Broadband Performance
- Excellent Unit-to-Unit Repeatability
- Extremely Low LO Drive Operation

**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system. Specifications are shown for Configurations A (B). See page 2 for port locations.

Parameter	LO (GHz)	RF (GHz)	IF (GHz)	Min	Typ	Max	Diode Option LO drive level (dBm)
Conversion Loss	25-60		DC-30		9 (15)	16 (21)	
Isolation (dB) LO-RF LO-IF RF-IF	25-67				See Plots		
Input 1 dB Compression (dBm)					+1 (+5)		L-Config. A: +10 to +16 (L-Config. B: +6 to +12)
Input Two-Tone Third Order Intercept Point (dBm)					+9 (+15)		L-Config. A: +10 to +16 (L-Config. B: +6 to +12)

### Part Number Options

Model Number	Description
MM1-2567LS <sup>1</sup>	Connectorized, L-Diode


<sup>1</sup> Note: For port locations and I/O designations, refer to the drawings on page 2 of this document.

# GaAs DOUBLE-BALANCED MIXER


Page 2

# MM1-2567LS

LO/RF 25 to 67 GHz  
IF DC to 30 GHz

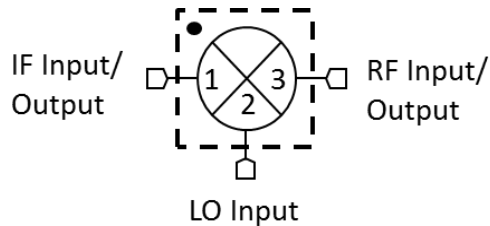


**Configuration A**

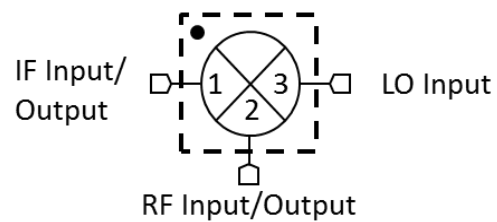

**Configuration B**

1. Configuration A/B refer to the same part number (MM1-0320H) used in one of two different ways for optimal spurious performance. For the lowest conversion loss, use the mixer in Configuration A (port 2 as the LO input, port 3 as the RF input or output). If you need to use a lower LO drive, use the mixer in Configuration B (port 2 as the RF input or output, port 3 as the LO input). For optimal spurious suppression, experimentation or simulation is required to choose between Configuration A and B. For more information, [see here](#).

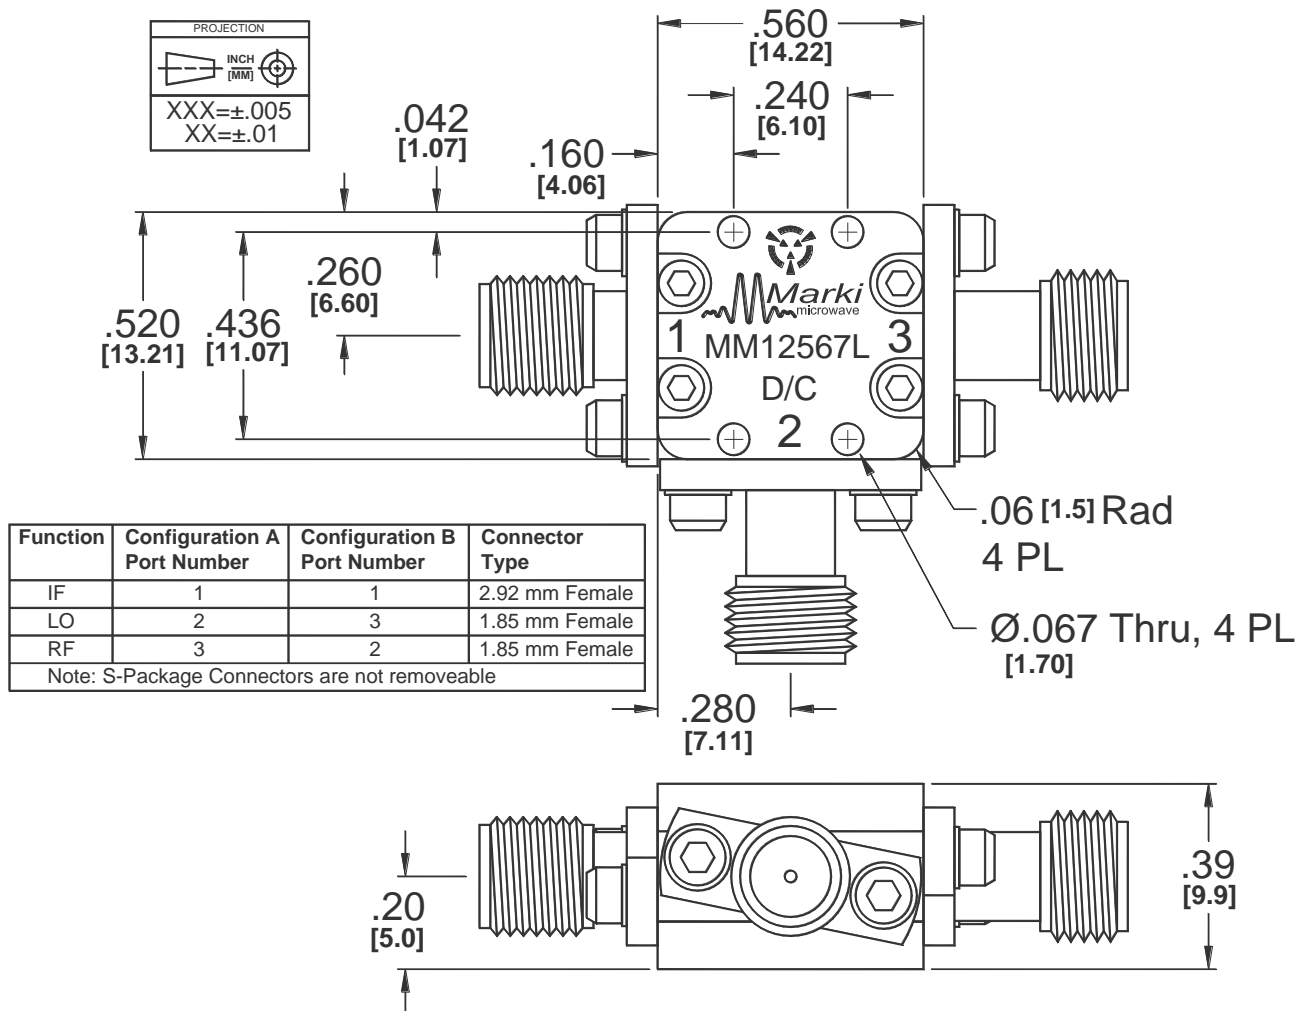








# GaAs DOUBLE-BALANCED MIXER

Page 3

# MM1-2567LS

LO/RF 25 to 67 GHz  
IF DC to 30 GHz

Typical Performance

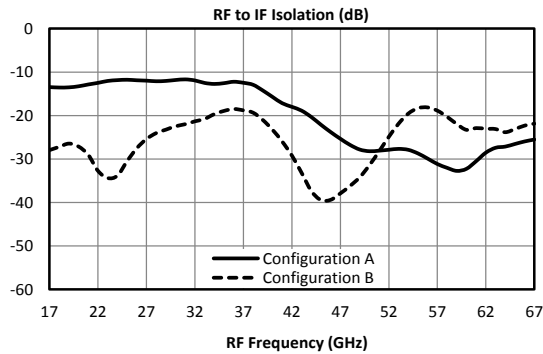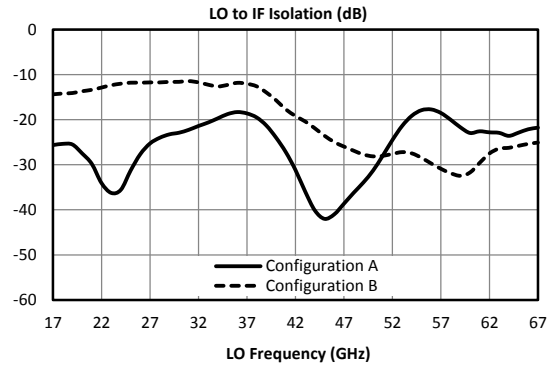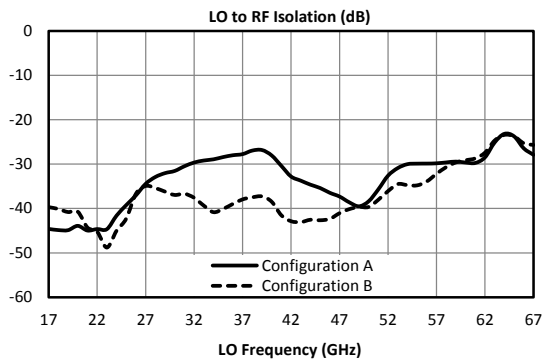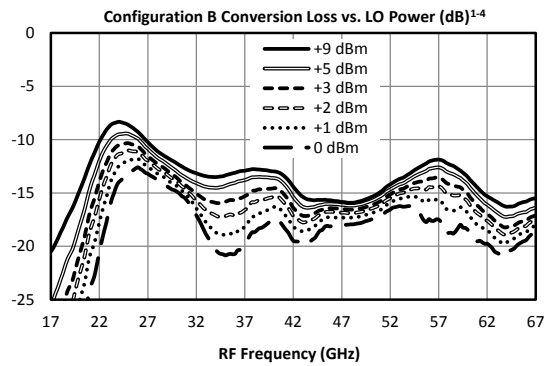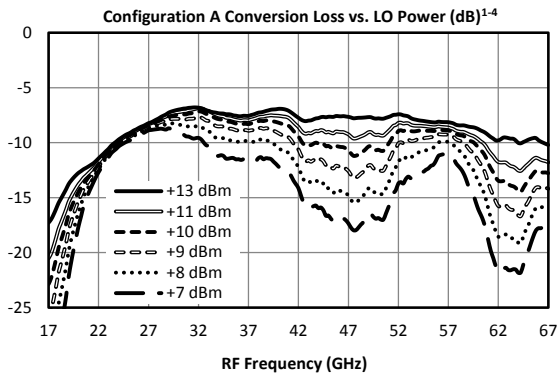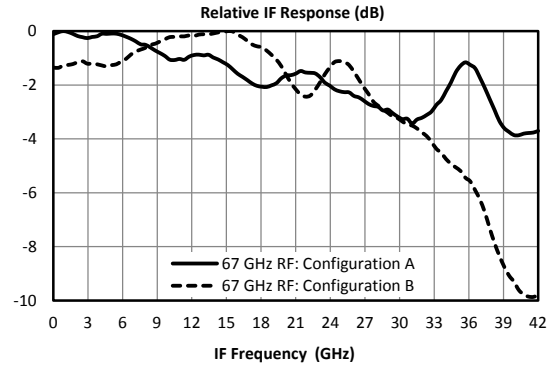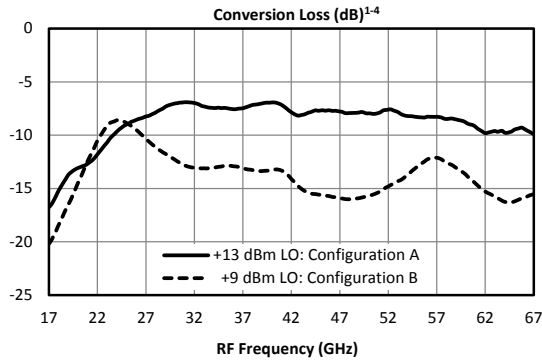







# GaAs DOUBLE-BALANCED MIXER

Page 4

# MM1-2567LS

LO/RF 25 to 67 GHz  
IF DC to 30 GHz

Typical Performance

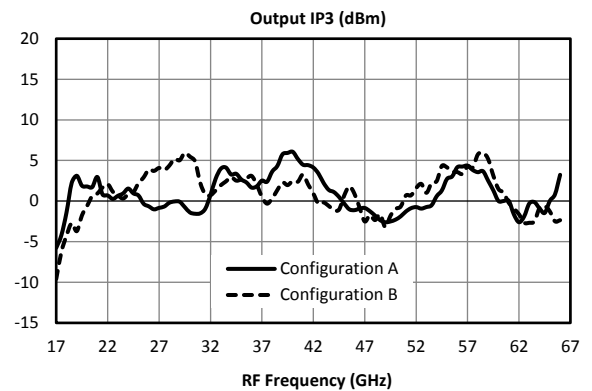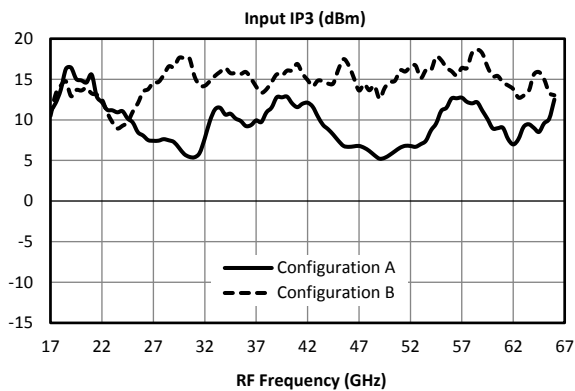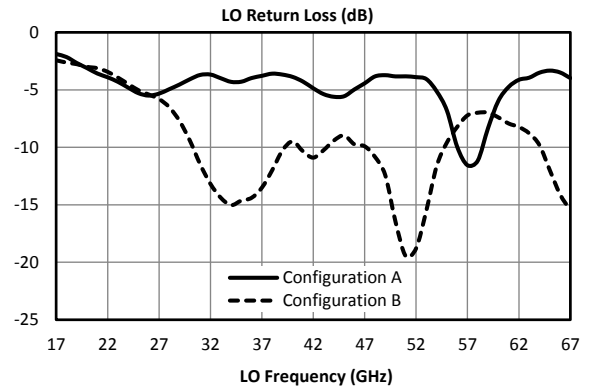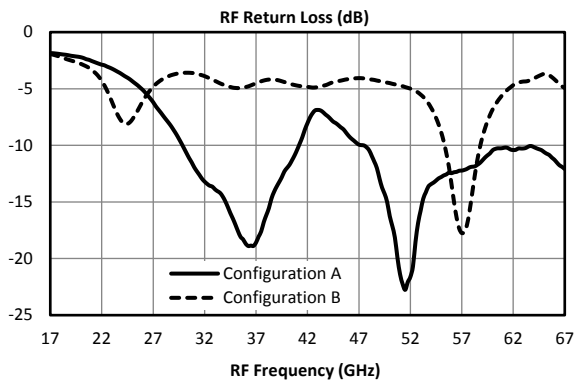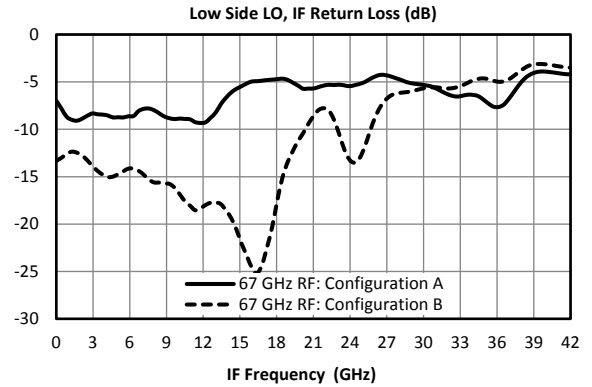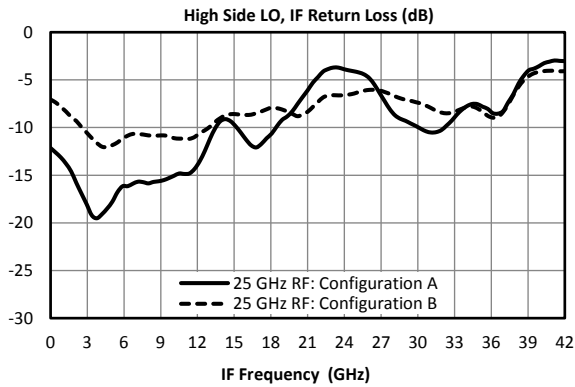







# GaAs DOUBLE-BALANCED MIXER

Page 5

# MM1-2567LS

LO/RF 25 to 67 GHz  
IF DC to 30 GHz

## Typical Performance

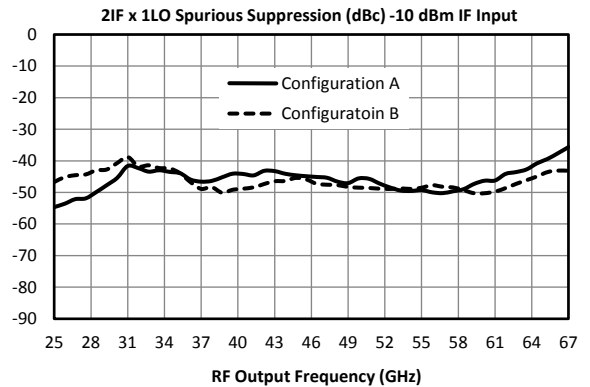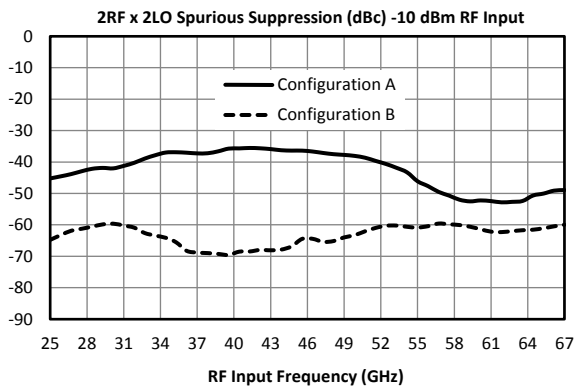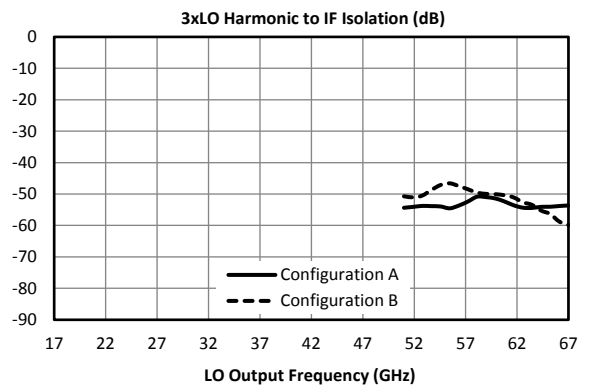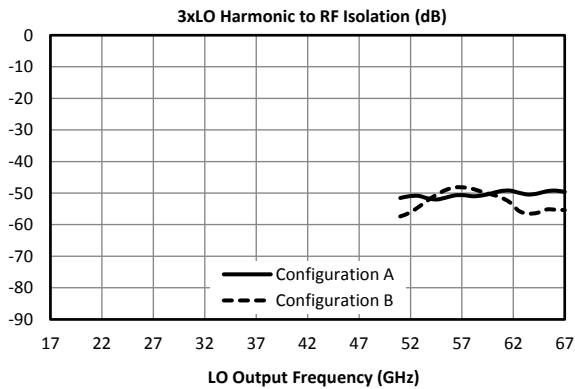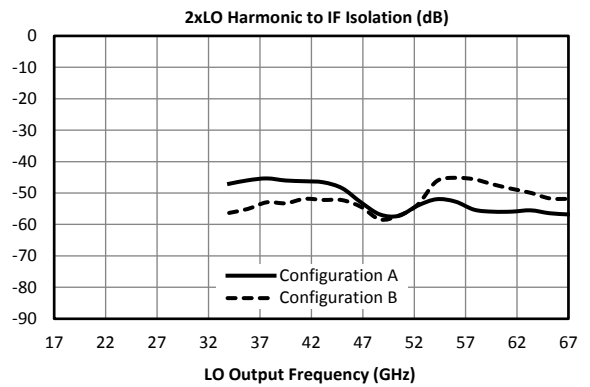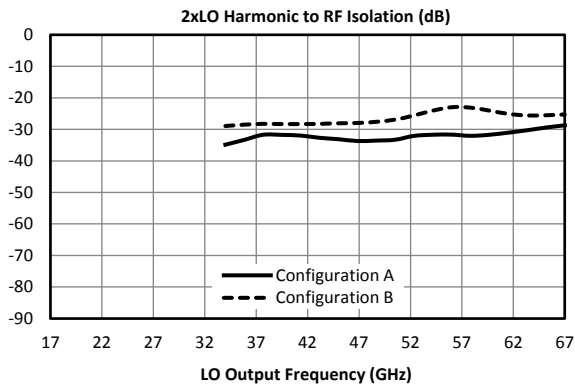



## GaAs DOUBLE-BALANCED MIXER

Page 6

## MM1-2567LS

LO/RF 25 to 67 GHz  
IF DC to 30 GHz

### Downconversion Spurious Suppression

Spurious data is taken by selecting RF and LO frequencies ( $\pm mLO \pm nRF$ ) within the RF/LO bands, to create a spurious output within the IF output band. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by (n-1), where "n" is the RF spur order. For example, the 2RFx2LO spur is 53 dBc for the A configuration for a -10 dBm input, so a -20 dBm RF input creates a spur that is (2-1) x (-10 dB) dB lower, or 53 dBc.

#### Typical Downconversion Spurious Suppression (dBc): L Diode, A Configuration (B Configuration)<sup>4</sup>

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xRF	14 (13)	Reference	24 (27)	11 (16)	35 (36)	26 (29)
2xRF	57 (60)	36 (42)	43 (63)	31 (50)	41 (52)	38 (49)
3xRF	83 (77)	51 (49)	48 (73)	50 (69)	53 (73)	51 (68)
4xRF	107 (105)	94 (85)	80 (104)	78 (108)	79 (103)	73 (101)
5xRF	120 (116)	114 (108)	103 (108)	105 (123)	90 (119)	91 (118)

### Upconversion Spurious Suppression

Spurious data is taken by mixing an input within the IF band, with LO frequencies ( $\pm mLO \pm nIF$ ), to create a spurious output within the RF output band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by (n-1), where "n" is the IF spur order. For example, the 2IFx1LO spur is typically 46 dBc for the A configuration for a -10 dBm input, so a -20 dBm IF input creates a spur that is (2-1) x (-10 dB) dB lower, or 56 dBc.

#### Typical Upconversion Spurious Suppression (dBc): L Diode, A Configuration (B Configuration)<sup>4</sup>

-10 dBm IF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
1xIF	12 (19)	Reference	16 (28)	10 (14)	38 (50)	29 (29)
2xIF	39 (45)	46 (48)	40 (37)	50 (44)	41 (39)	51 (52)
3xIF	62 (67)	54 (53)	53 (61)	58 (57)	54 (63)	44 (51)
4xIF	95 (96)	95 (92)	82 (83)	91 (88)	76 (75)	84 (85)
5xIF	113 (111)	109 (106)	102 (102)	105 (105)	101 (103)	91 (92)



## GaAs DOUBLE-BALANCED MIXER

Page 7

## MM1-2567LS

LO/RF 25 to 67 GHz  
IF DC to 30 GHz

Port	Description	DC Interface Schematic
Port 1	Port 1 is DC coupled to the diodes. Blocking capacitor is optional.	
Port 2	Port 2 is DC short to ground and AC matched to 50 Ohms from 25 to 67 GHz. Blocking capacitor is optional.	
Port 3	Port 3 is DC short to ground and AC matched to 50 Ohms from 25 to 67 GHz. Blocking capacitor is optional.	

Absolute Maximum Ratings	
Parameter	Maximum Rating
Port 2 DC Current	21 mA
Port 3 DC Current	30 mA
Port 1 DC Current	30 mA
RF Power Handling (RF+LO)	+25 dBm at +25°C, derated linearly to +20 dBm at +100°C
Operating Temperature	-55°C to +100°C
Storage Temperature	-65°C to +125°C

### DATA SHEET NOTES:

- Mixer Conversion Loss Plot IF frequency is 100 MHz.
- Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
- Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
- Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
- Unless otherwise specified, Configuration A data is taken with +13 dBm LO drive, and Configuration B is taken with +9 dBm drive
- Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
- Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

*Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.*

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | [info@markimicrowave.com](mailto:info@markimicrowave.com)  
[www.markimicrowave.com](http://www.markimicrowave.com)

11/23/16

