




## BROADBAND BALUN (200 kHz to 3 GHz)

**BAL-0003**

### Features

- 200 kHz to 3 GHz Balun (Balanced to Unbalanced Transformer)
- Matched 50 Ohm Impedance on Input and Output Ports
- Tuned for Optimal Phase/Amplitude Balance
- Applications: Analog to Digital Converters, Balanced Receivers, Baseband Digital Modulation, Signal Integrity

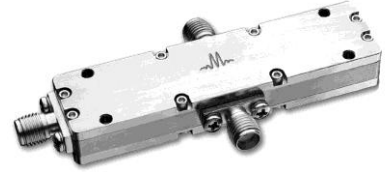

**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.


Parameter	Frequency Range	Min	Typ	Max	
Nominal Insertion Loss (dB)	200 kHz to 3 GHz		6		
Nominal Phase Shift (Degrees)			180		
Amplitude Balance (dB)			±0.05	±0.5	
Phase Balance (Degrees)			±1	±5	
Common Mode Rejection (dB)			35	45	
Excess Insertion Loss (dB) <sup>1</sup>				1	2
Isolation (dB)				8	
VSWR (Input)				1.35	
VSWR (Output)				1.7	
Risetime /Falltime (ps) <sup>2</sup>				48	
Weight (g)				27	

<sup>1</sup>Excess Insertion Loss = (Common Port to Output Port Insertion Loss) – 6 dB.

<sup>2</sup>Specified as 90%/10%. Calculated from  $\tau_{balun}^2 = (\tau_{out}^2 - \tau_{in}^2)$

Model Number	Description
BAL-0003	200 kHz to 3 GHz Balun with SMA connectors <sup>1</sup>

<sup>1</sup>Default is SMA female connectors. Consult factory for other connector options.

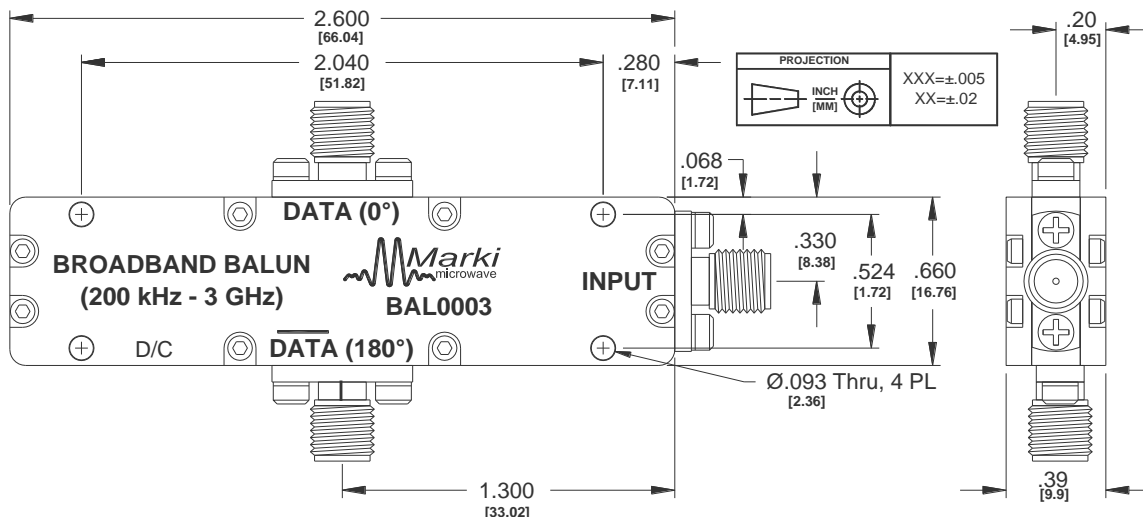


# BROADBAND BALUN (200 kHz to 3 GHz)

**BAL-0003**

Page 2

## Block Diagram

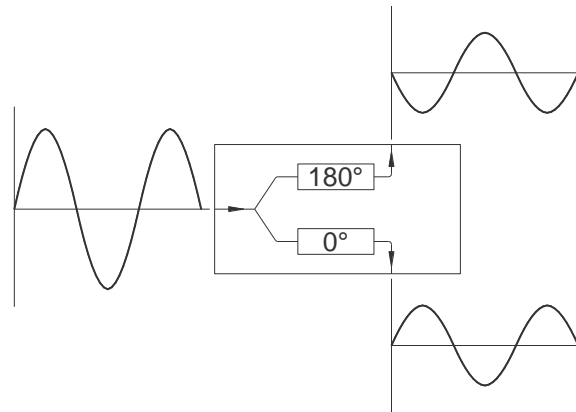

## Typical Performance

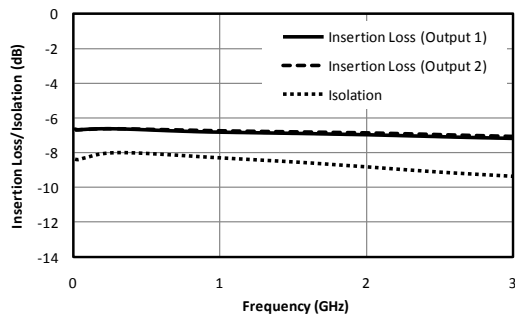


Fig. 1. Common to output port insertion loss and output to output port Isolation.

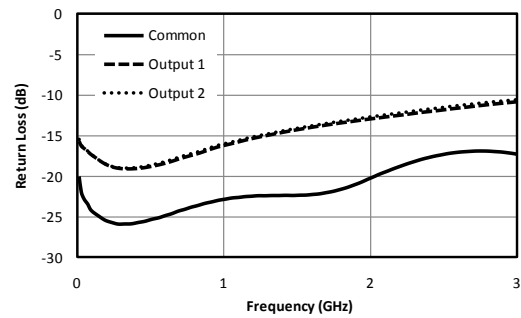


Fig. 2. Return loss for common port and output ports.

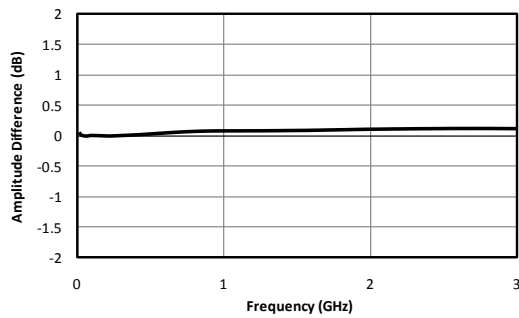


Fig. 3. Amplitude balance between output ports.

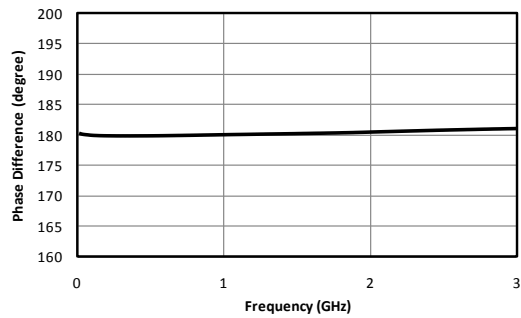


Fig. 4. Phase balance between output ports.

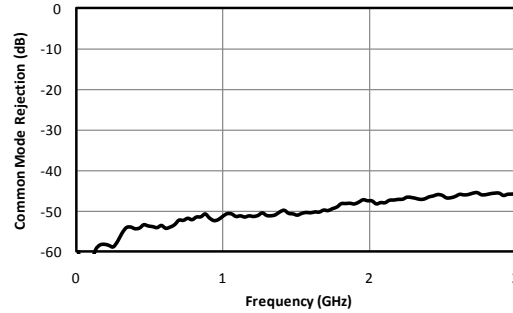


Fig. 5. Common mode rejection.

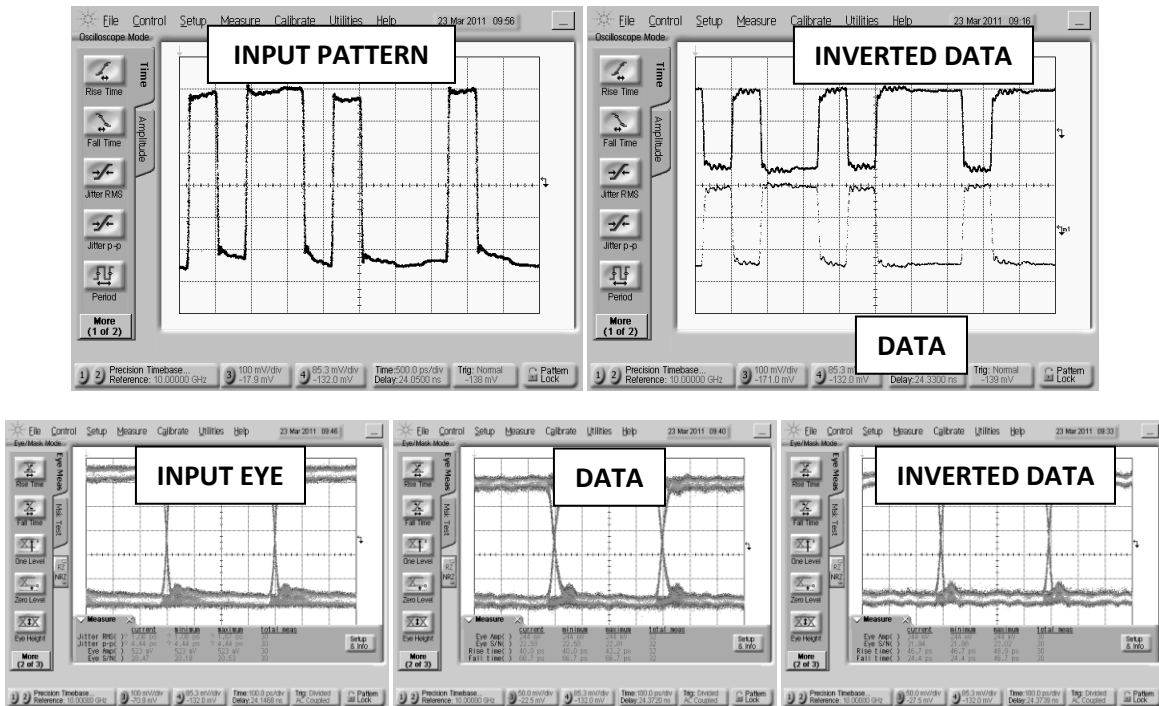


Fig. 6. Oscilloscope measurements of the BAL-0003 with a 2.5 Gb/s PRBS pattern. Bit pattern is measured with a  $2^7-1$  PRBS input demonstrating extremely good pulse fidelity for both inverted and non-inverted output. Eye diagrams are taken with a  $2^{31}-1$  PRBS input demonstrating minimal eye distortion/closure afforded by the extremely low frequency operation of the balun (<200 kHz).

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.