

## BANDPASS FILTER

## FB-1840



### Features

- 3 dB Bandwidth,  $\pm 9.5\%$
- Rejection Characterized by Chebyshev Transfer Function
- 5 Section Filter
- User defined option available

### Specifications

Parameter	Min	Typ.	Max
Center Frequency, $f_c$ (GHz)		18.4	
Passband (GHz)		$\pm 9.5\%$ of $f_c$	
Insertion Loss @ $f_c$ (dB)			3
Return Loss in Passband (dB)	10	15	
Stopband Suppression (dB) beyond $\pm 30\%$ of $f_c$	25	30	
Stopband Suppression (dB) beyond $\pm 43\%$ of $f_c$	40	50	
Impedance ( $\Omega$ )		50	
RF Power (W)			1

Model Number <sup>1</sup>	Connector Options		Description	Outline
	Example: <b>FB-1840-2K</b> (2.92 M-F)			
FB-1840 No dash (F-F)	-1 (F-M) -2 (M-F) -3 (M-M)	S (SMA) K (2.92) V (2.40)	Center Frequency 18.40 GHz, Bandpass Filter with SMA Female connectors	<a href="#">KF</a>

<sup>1</sup>Connectors are SMA Female by default.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

## BANDPASS FILTER

FB-1840

Page 2

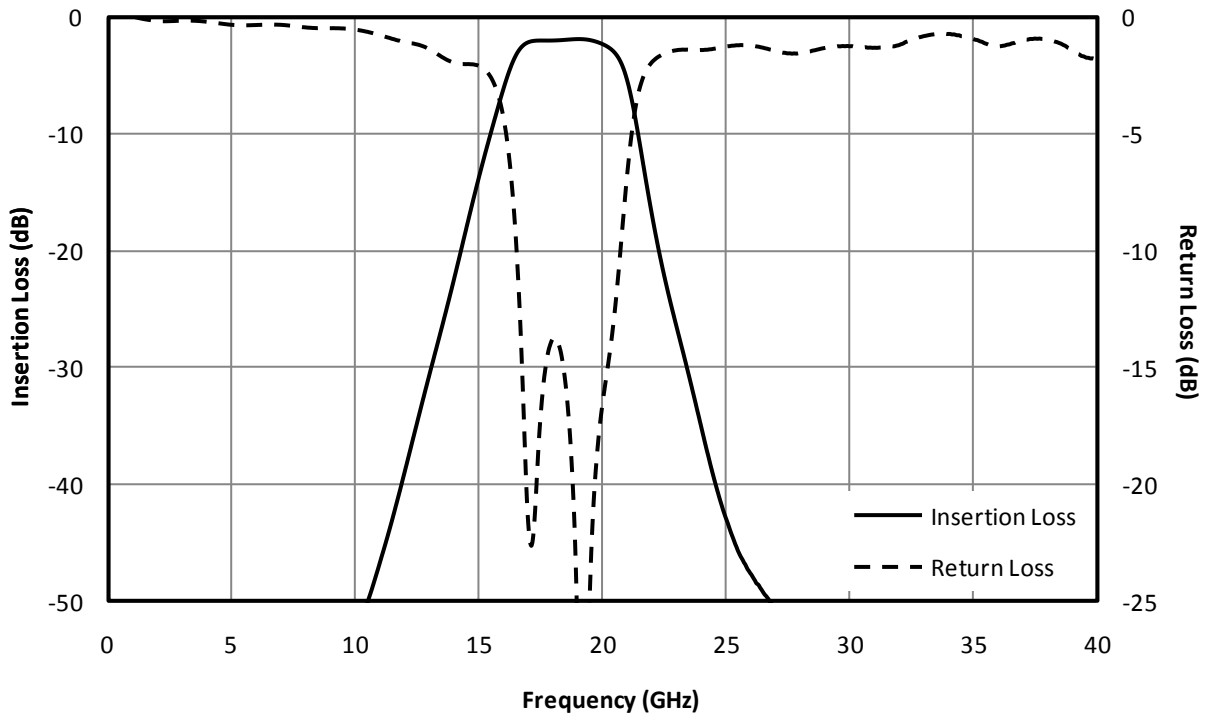


Fig. 1. Magnitude response for a typical FB-1840.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax: 408.778.4300 | [info@markimicrowave.com](mailto:info@markimicrowave.com)

[www.markimicrowave.com](http://www.markimicrowave.com)