

BANDPASS FILTER

FB-2700



Features

- 3 dB Bandwidth, $\pm 7.5\%$
- Rejection Characterized by Chebyshev Transfer Function
- 5 Section Filter
- User defined option available

Specifications


Parameter	Min	Typ.	Max
Center Frequency, f_c (GHz)		27	
Passband (GHz)		$\pm 7.5\%$ of f_c	
Insertion Loss @ f_c (dB)		3	
Return Loss in Passband (dB)	10	15	
Stopband Suppression (dB) beyond 25% of f_c	30	35	
Stopband Suppression (dB) beyond 35% of f_c	40	50	
Impedance (Ω)		50	
RF Power (W)			1

Part Number Options

Please specify connector configuration by adding to model number.					
Center Frequency (GHz)	Model number	Connector configuration ¹		Example	Outline
27	FB-2700	No dash (F-F)			
User Defined	Contact factory	-1 (F-M)	K (2.92)	FB-2700 -2K (K-Male in; K-Female out)	KE
		-2 (M-F)	V (2.40)		
		-3 (M-M)			

¹Connectors are 2.92 mm by default.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

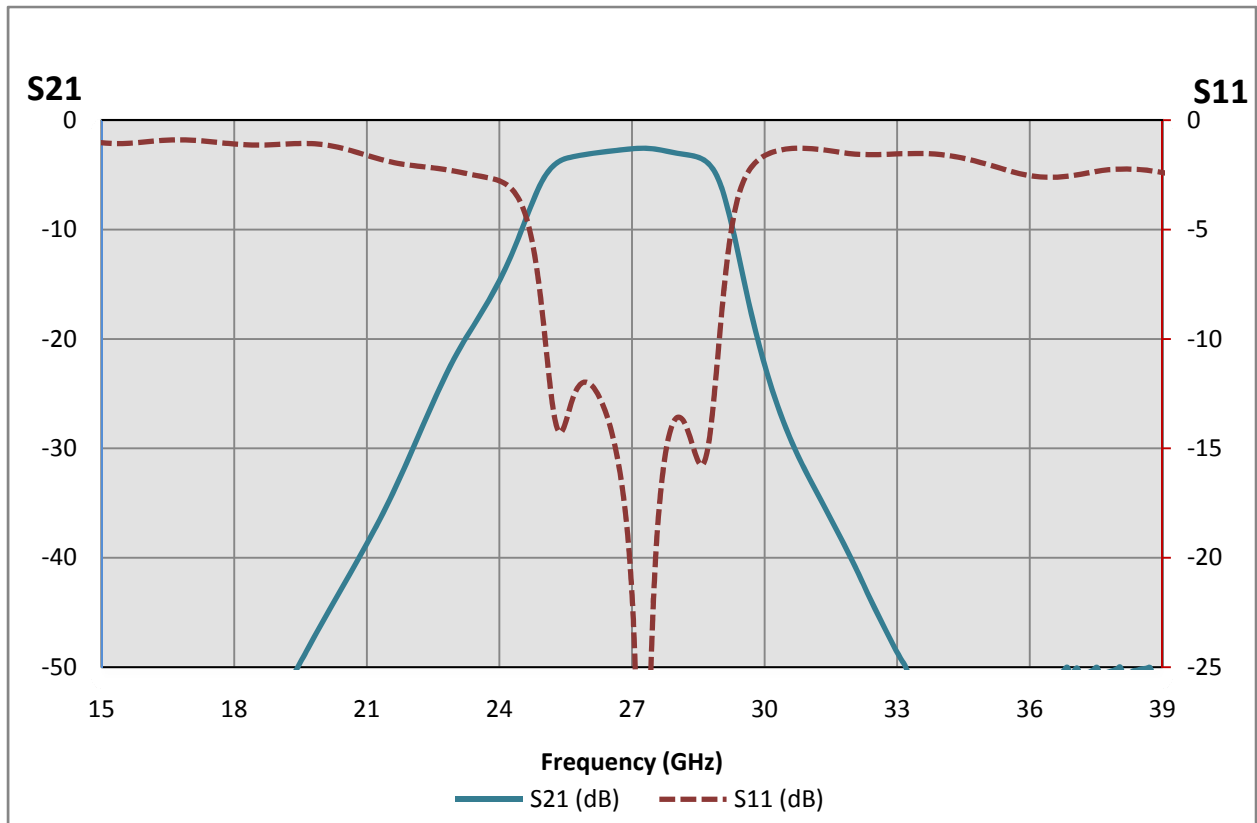

Magnitude response for a typical 27 GHz Band Pass Filter.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax: 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com