

## BIAS TEE

## BT-0026

### Features

- Input 10 MHz to 26.5 GHz
- Non-Resonant
- Low Current Leakage




**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	10 MHz to 26.5 GHz		1.0	2.0
DC Current (mA)				500
DC Port Isolation (dB)				40.0
DC Voltage Maximum (V)				30
RF Power Maximum (W)				1

Model Number	Description
BT-0026	10 MHz - 26.5 GHz Bias Tee 2.92 mm connectors <sup>1</sup>

<sup>1</sup>Default is 2.92 mm connectors. Contact factory for other connector options.

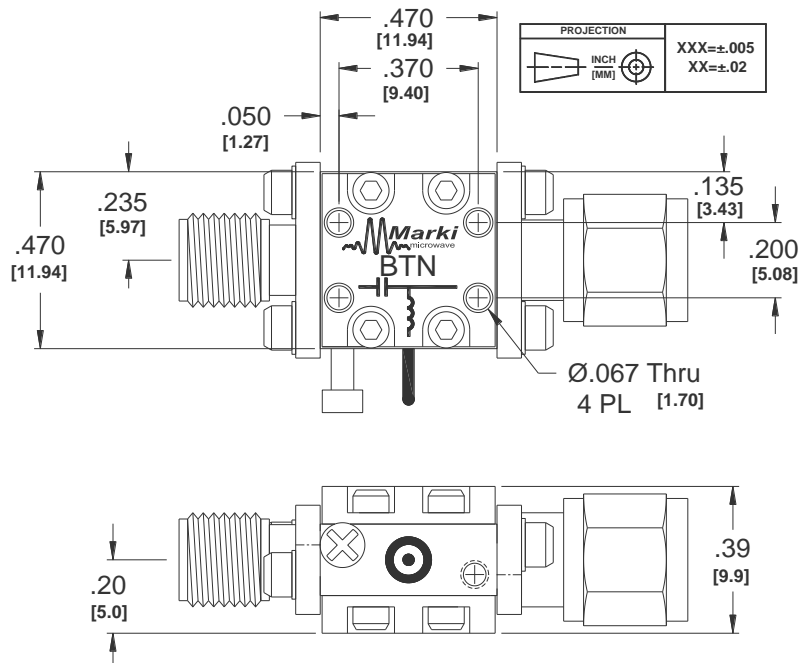

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.



**BIAS TEE**

Page 2

**BT-0026**

Input 10.0 MHz to 26.5 GHz

Typical Performance

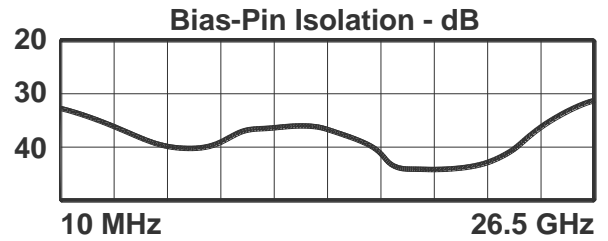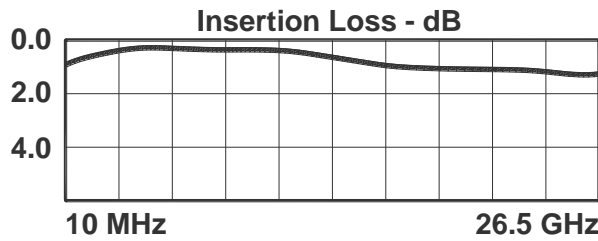

NOTE:

Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | [info@markimicrowave.com](mailto:info@markimicrowave.com)

[www.markimicrowave.com](http://www.markimicrowave.com)