

## BANDPASS FILTER

## FB-3700



### Features

- 3 dB Bandwidth,  $\pm 12\%$
- Rejection Characterized by Chebyshev Transfer Function
- 7 Section Filter
- User defined option available

### Specifications

Parameter	Min	Typ.	Max
Center Frequency, $f_c$ (GHz)		37	
Passband (GHz)		$\pm 12\%$ of $f_c$	
Insertion Loss @ $f_c$ (dB)		3	
Return Loss in Passband (dB)	10	15	
Stopband Suppression (dB) beyond 24% of $f_c$	30	35	
Stopband Suppression (dB) beyond 32% of $f_c$	40	50	
Impedance ( $\Omega$ )		50	
RF Power (W)			1

Model Number <sup>1</sup>	Connector Options		Description	Outline
	Example: <b>FB-3700-2K</b> (2.92 M-F)			
FB-3700 No dash (F-F)	-1 (F-M) -2 (M-F) -3 (M-M)	K (2.92) V (2.40)	Center Frequency 37 GHz, Bandpass Filter with 2.92 mm Female connectors	<a href="#">PF</a>

<sup>1</sup>Connectors are 2.92 mm by default.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

**BANDPASS FILTER**

**FB-3700**

Page 2

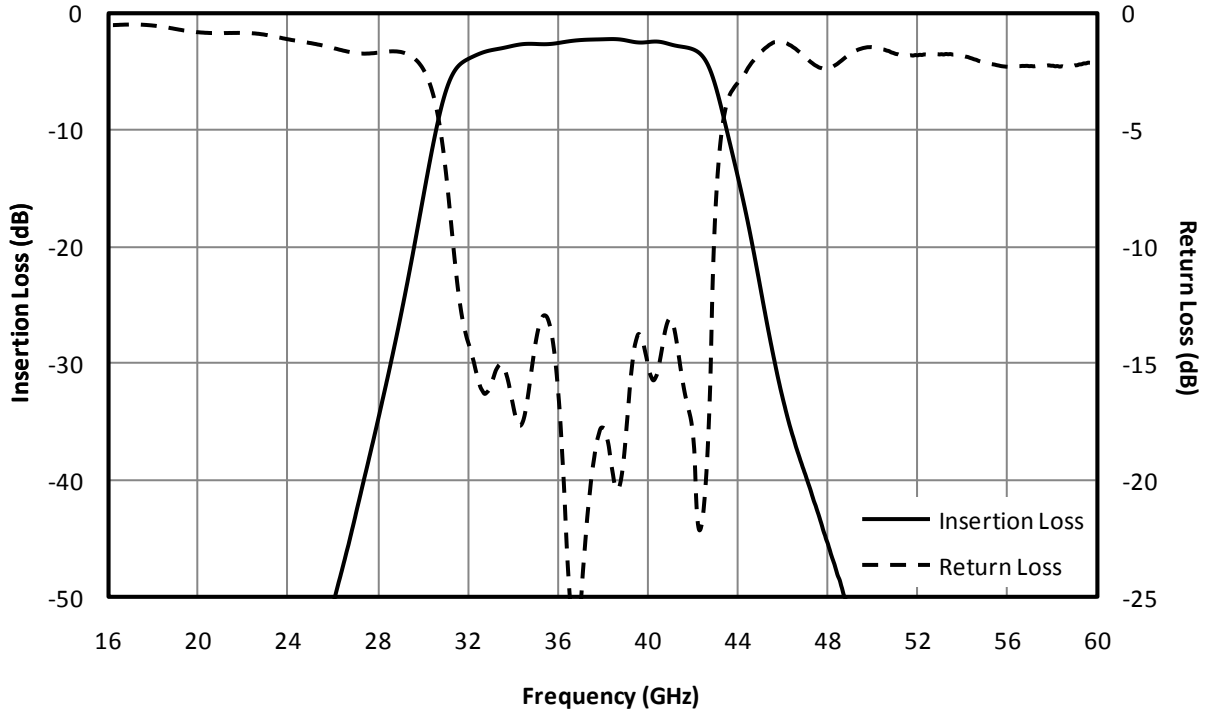


Fig. 1. Magnitude response for a typical FB-3700.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax: 408.778.4300 | [info@markimicrowave.com](mailto:info@markimicrowave.com)

[www.markimicrowave.com](http://www.markimicrowave.com)