

HIGHPASS FILTER

FH-1800

This general purpose high pass filter offers high stop band attenuation and low insertion loss in the passband. These filters can be used to eliminate unwanted side bands during up-conversion or for removing spurious interference and noise. Filters with customized frequency cutoff, usable passband and stopband rejection are available upon customer request. Contact the factory for more details.


Features

- Compact Size
- Low Insertion Loss
- High Stop Band Attenuation
- User defined options available

Electrical Specifications – Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency (GHz)	Min	Typ.	Max
Cutoff Frequency	18			
Passband Insertion Loss (dB)	18-36		0.9	2
Passband Return Loss (dB)	18-36	8		
Stopband Suppression (dB)	DC-12	45	50	
	15	25	30	
Impedance (Ω)			50	
RF Power (W)				1

*Higher rejection can be obtained at the expense of longer dimension.

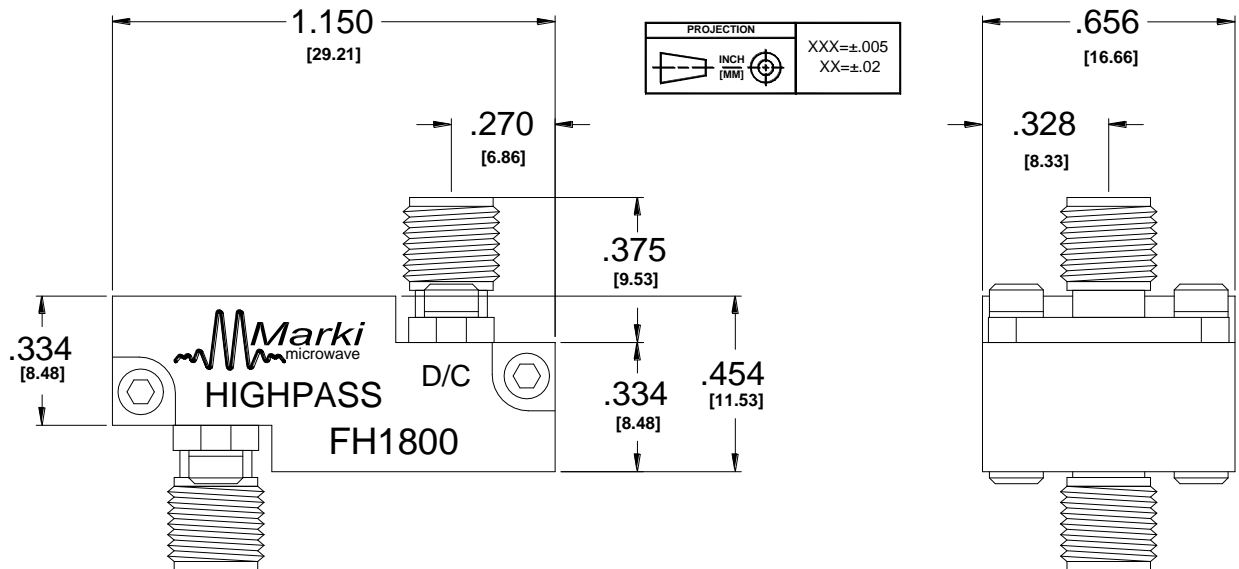

Typical Performance

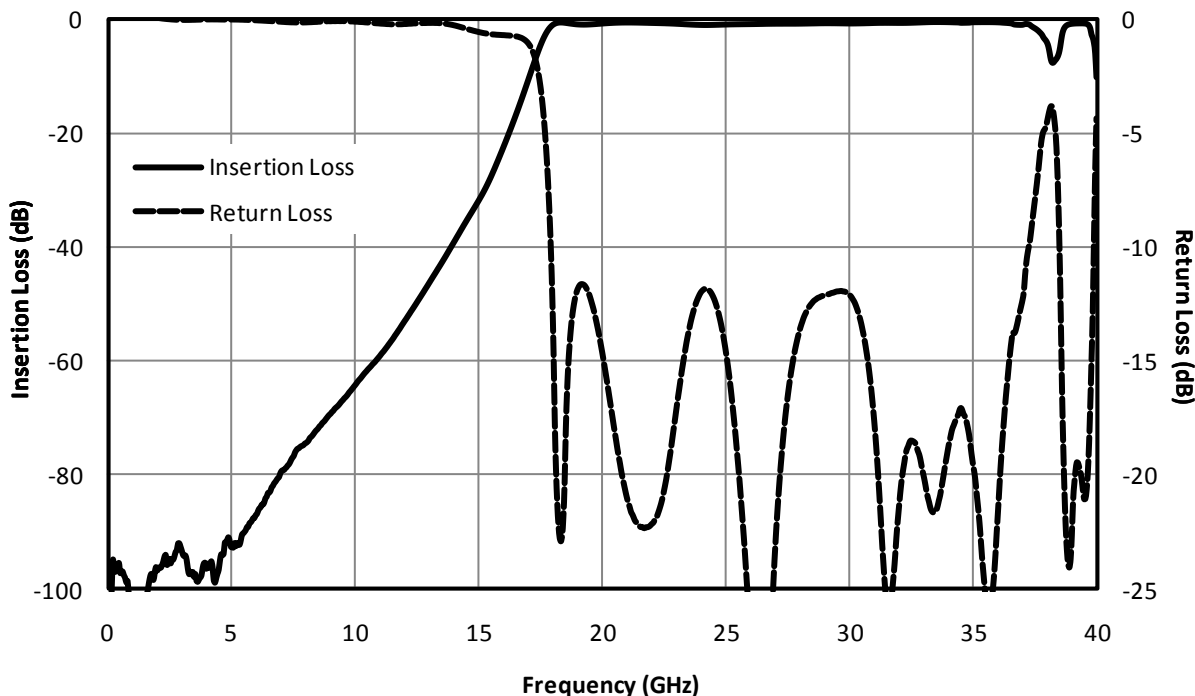


Fig. Magnitude response for a typical FH-1800 Filter.

Model Number ¹	Connector Options		Description
FH-1800 No dash (F-F)	Example: FH-1800-2K (2.92 M-F)		Center Frequency 18 GHz, Highpass Filter with 2.92 mm Female connectors
	-1 (F-M)	K (2.92)	
	-2 (M-F)	V (2.40)	
	-3 (M-M)		

¹Connectors are 2.92 mm Female by default.

NOTE:

Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.

