

BIAS TEE

BT-0065

Features


- Input 4 kHz to 65 GHz
- Non-Resonant



Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	4 kHz to 65 GHz		1.7	3.0
DC Current (mA)				500
DC Port Isolation (dB)	4 kHz		20	
	4 to 14 kHz		28	
	4 kHz to 65 GHz		40	
DC Voltage Maximum (V)	4 kHz to 65 GHz			30
RF Power Maximum (W)	4 kHz to 65 GHz			1

Model Number	Description
BT-0065	4 kHz to 65 GHz Bias Tee 2.40 mm connectors

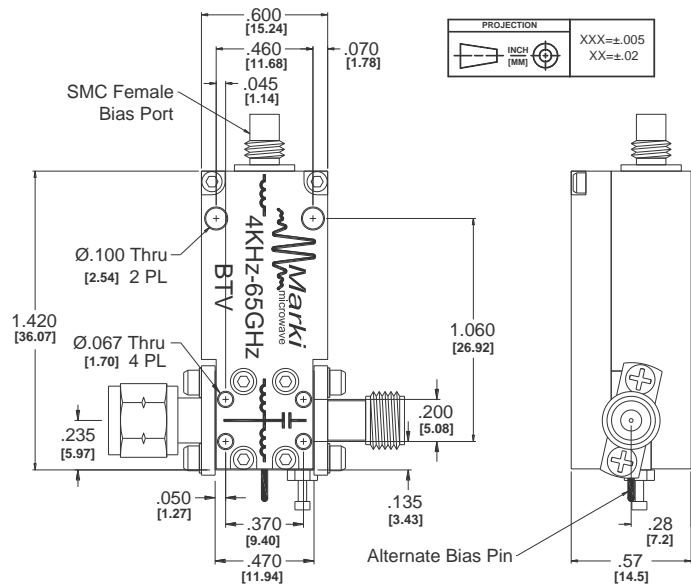

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.




BIAS TEE

Page 2

BT-0065

Input 4 kHz to 65 GHz

Typical Performance

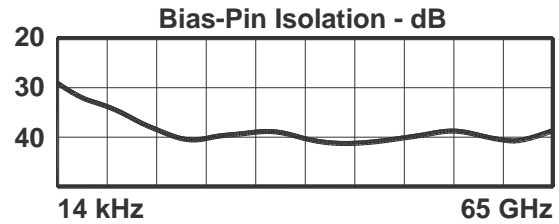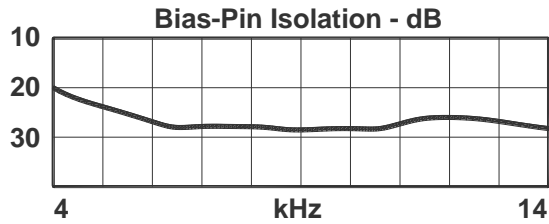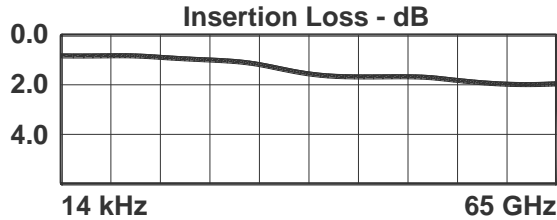

NOTE:
Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com