




215 Vineyard Court, Morgan Hill, CA 95037
 PHONE (408) 778-4200 FAX (408) 778-4300
 Website: MarkiMicrowave.com

It is recommended that the negative bias be applied before or concurrent with the positive bias.

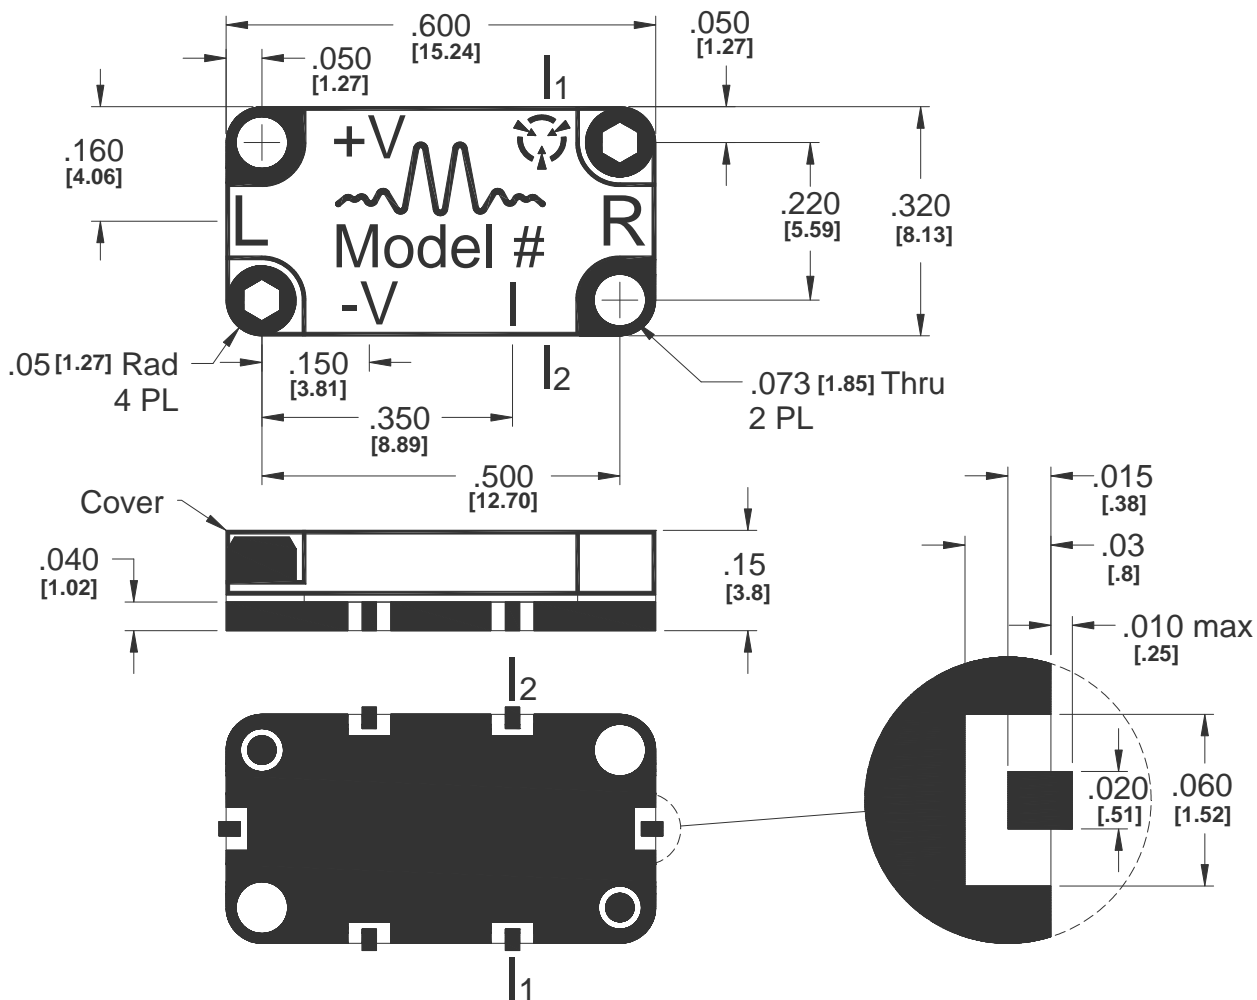

I1 must be specified if required
 I2 is standard for EZ-Carrier catalog mixers

Shaded areas are Metal

EZ-Style Mixer/LO-Buffer Amplifier Outline

Projection		XXX=±.005 XX=±.02
	Inch [mm]	

EZ I/O castellations are Half Hard Brass; reflow soldered with Sn63/Pb37.
 EZ carrier is Half Hard Brass, plated Electroless Nickel 150-250 μ-inches, followed by Nickel Flash.
 Click on links for [suggested PCB layout](#), [DXF file](#), and [installation notes](#).