



LEAD-FREE / RoHS-COMPLIANT

SURFACE-MOUNT BROADBAND BALUN

BAL-0208SMG

The BAL-0208SMG is a Surface Mount Microlithic™ balun. As with all Microlithic™ baluns, it features excellent amplitude balance, phase balance, and common mode rejection across a broad bandwidth and in a miniaturized form factor. It has significant isolation, reducing the reflection of unwanted common mode signals. The BAL-0208SMG is a lead free, RoHS compliant package compatible with standard leaded and lead-free solder reflows. SMA connectorized evaluation packages are available. The BAL-0208SMG is an excellent choice for balanced amplifiers, clock distribution, and higher order Nyquist sampling in analog to digital converters



Features

- 2 GHz to 8 GHz 1:2 Balun (Balanced to Unbalanced Transformer)
- Transforms 50 Ω Input to 100 Ω Differential (50 Ohm Single) Output
- Tuned for Optimal Phase/Amplitude Balance
- Applications: Analog to Digital Converters, Balanced Receivers, Balanced Amplifiers, Mixers, Clock Distribution, Signal Integrity
- [BAL-0208SMG.s3p](#)

Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency Range	Min	Typ	Max
Nominal Insertion Loss (dB)	2 GHz to 8 GHz		3	
Nominal Phase Shift (Degrees)			180	
Amplitude Balance (dB)			±0.3	±0.8
Phase Balance (Degrees)	2 GHz to 6 GHz		±1	±5
	6 GHz to 8 GHz		±10	± 20
Common Mode Rejection (dB)	2 GHz to 6 GHz	25	34	
	6 GHz to 8 GHz	15	22	
Excess Insertion Loss (dB) ^{1,2}	2 GHz to 8 GHz		2.5	4.5
Isolation (dB)			17	
VSWR			1.7	4.5
Total Input Power (W)				

¹Excess Insertion Loss = (Common Port to Output Port Insertion Loss) – 3 dB.


²Includes fixture losses.

Model Number	Description
BAL-0208SMG	2 GHz to 8 GHz Balun, Surface Mount, LEAD-FREE/RoHS COMPLIANT


SURFACE-MOUNT BROADBAND BALUN

BAL-0208SMG


Page 2

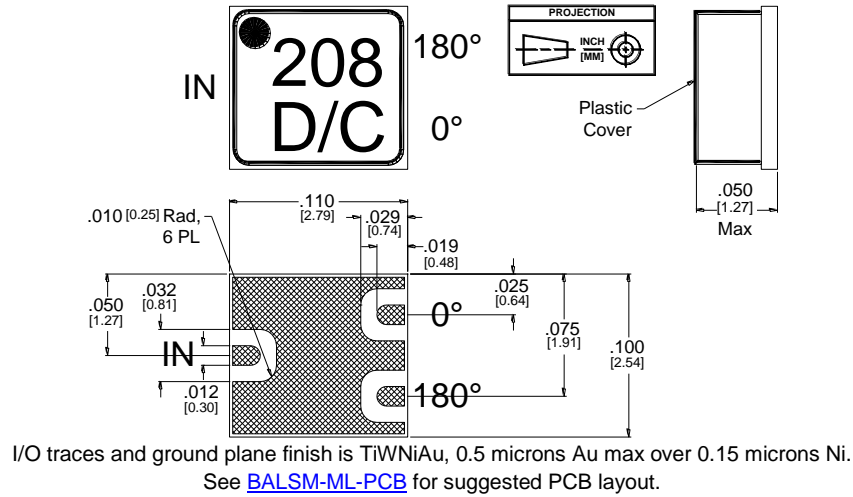

Block Diagram

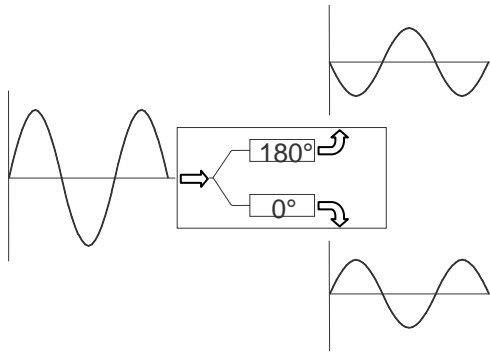

Single ended to differential

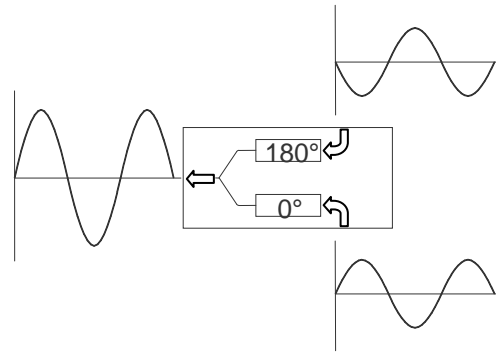

Differential to single ended

Typical Performance

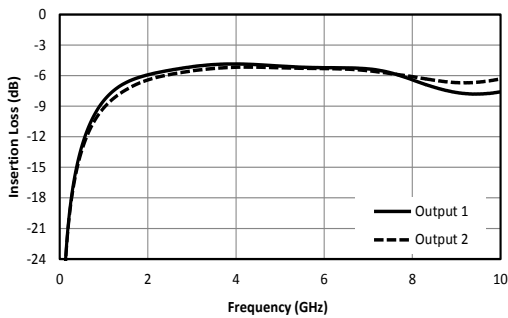


Fig. 1. Common to balanced port insertion loss¹

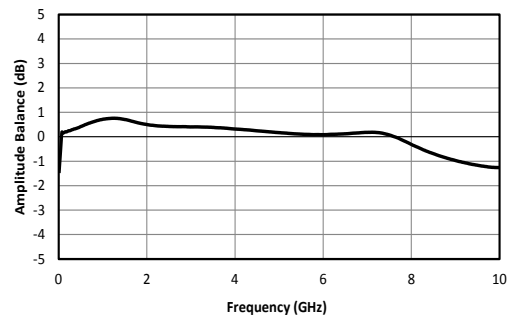


Fig. 2. Amplitude balance between balanced ports.

SURFACE-MOUNT BROADBAND BALUN

BAL-0208SMG

Page 3

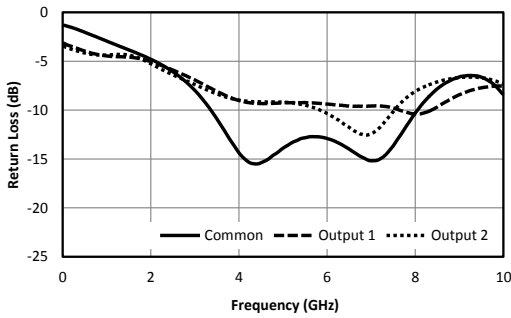


Fig. 3. Return loss for common port and balanced ports.

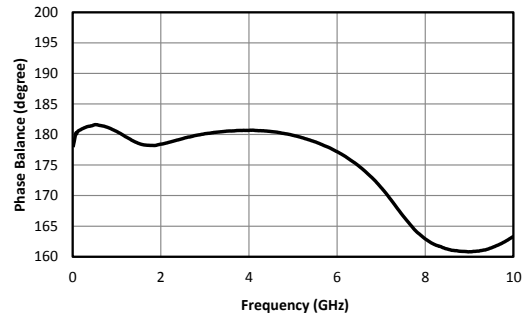


Fig. 4. Phase balance between balanced ports.

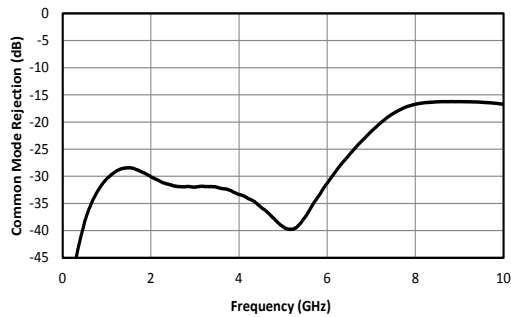


Fig. 5. Common mode rejection

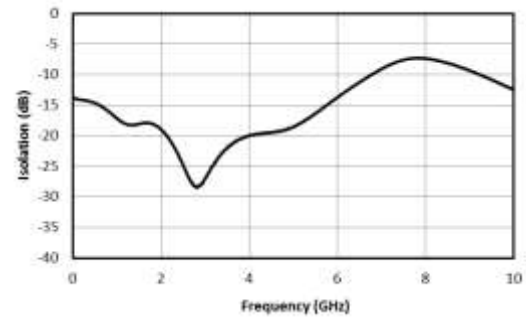
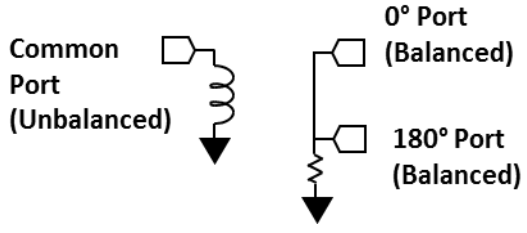


Fig. 6. Balanced port to balanced port isolation

¹Includes test fixture loss. Results are not de-embedded.

DC Interface

Port	Description	DC Interface Schematic
Common Port (Unbalanced)	The common port is DC short to ground.	
0° Port (Balanced)	The 0° port is DC short to the 180° port and passes through a resistor to ground.	
180° Port (Balanced)	The 180° port is DC short to the 0° port and passes through a resistor to ground.	

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.