

## LEAD-FREE / RoHS-COMPLIANT

### HIGH POWER SURFACE-MOUNT BALUN

### BALH-0003SMG

#### Features

- 500 kHz to 3 GHz Balun (Balanced to Unbalanced Transformer)
- High 37 dBm 1-dB compression enables high power applications
- Tuned for Optimal Phase/Amplitude Balance
- Applications: Balanced Amplifiers, Baseband Digital Modulation, Signal Integrity
- [BALH-0003SMG.s3p](#)



**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency Range	Min	Typ	Max	
Insertion Loss as a mode converter (dB)	500 kHz to 3 GHz		2	3.5	
Input 1 dB Compression (dBm)			37		
Nominal Phase Shift (Degrees)				180	
Amplitude Balance (dB)				0.2	0.8
Phase Balance (Degrees)				2	8
Common Mode Rejection (dB)			20	35	
Isolation (dB)				7	
VSWR (Input)				1.6	
VSWR (Output)				1.1	
Risetime /Falltime (ps) <sup>1</sup>				22	


<sup>1</sup>Specified as 90%/10%. Calculated from  $\tau_{\text{balun}}^2 = (\tau_{\text{out}}^2 - \tau_{\text{in}}^2)$

Model Number	Description
BALH-0003SMG	500 kHz to 3 GHz Balun, High Power, Surface Mount, <b>LEAD-FREE/RoHS COMPLIANT</b>
EVAL-BALH-0003	Connectorized Evaluation Board, <b>LEAD-FREE/RoHS COMPLIANT</b>


# HIGH POWER SURFACE-MOUNT BALUN

# BALH-0003SMG

Page 2

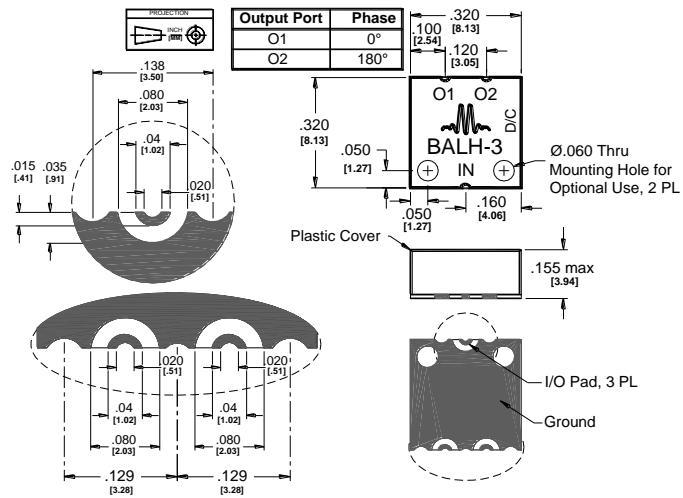

Substrate material is 8-mil thick Rogers 4003, 1 Oz Electrodeposited Cu. I/O Pads & Ground Plane Finish is ENIG: Gold 2 to 8 μ-inches, over Nickel, 100-200 μ-inches, over Cu. See [BALSMG-PCB](#) for suggested PCB layout

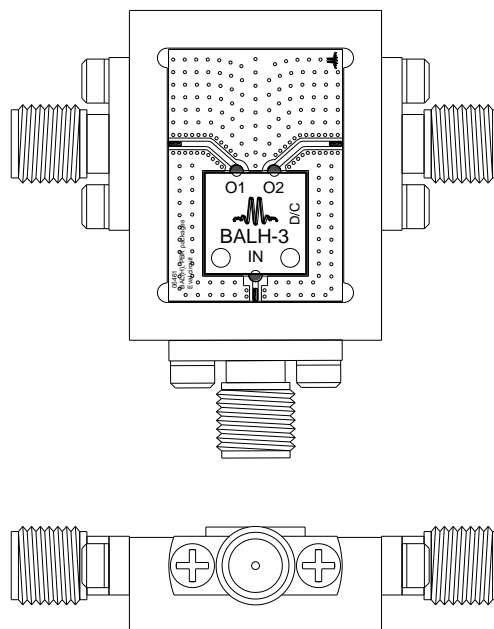


Evaluation Board outline

# HIGH POWER SURFACE-MOUNT BALUN

# BALH-0003SMG

Page 3

## Block Diagram

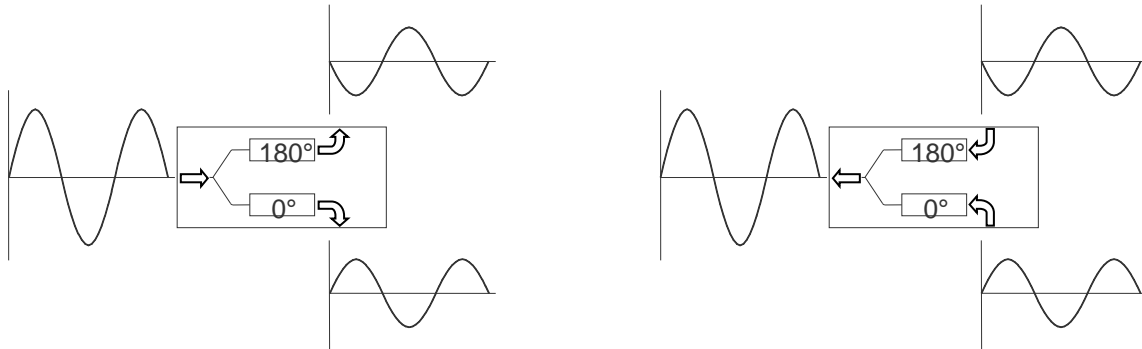

Single ended to differential

Differential to single ended

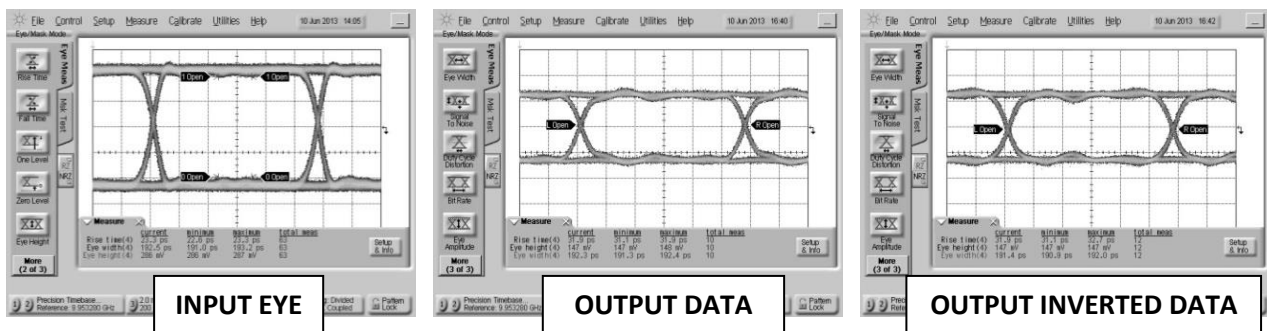
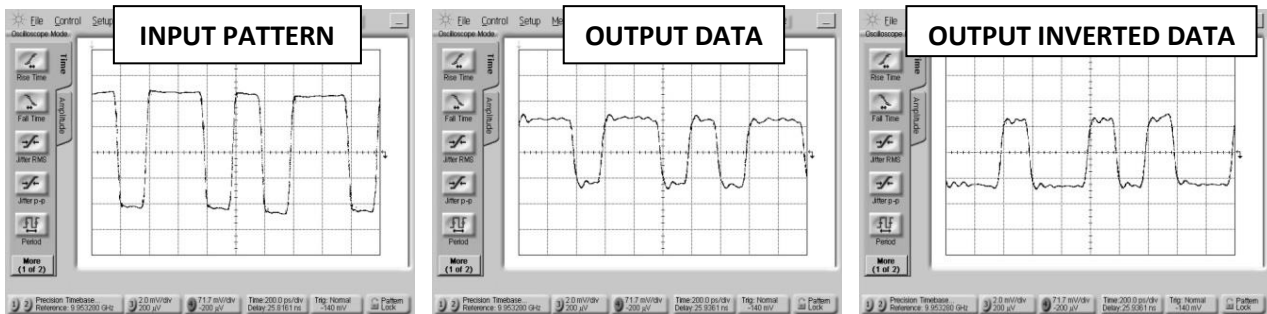


Fig. 1. Oscilloscope measurements of the BALH-0003SMG with a 5 Gb/s PRBS pattern. Bit pattern is measured with a  $2^7-1$  PRBS input demonstrating extremely good pulse fidelity for both inverted and non-inverted output. Eye diagrams are taken with a  $2^{31}-1$  PRBS input demonstrating minimal eye distortion/closure afforded by the extremely low frequency operation of the balun (<500 kHz).

**Mixed Mode Scattering Parameters**

Mixed mode scattering parameters are used to characterize differential circuits. For baluns, this means that the 0° and 180° ports become a single 100Ω differential port and the common port remains the same 50Ω common port. The two-port s-parameters of the balun are then characterized based on differential (d), common mode (c), or single-ended (s) signals. For example: Sds12 is the differential output response given a single ended input.

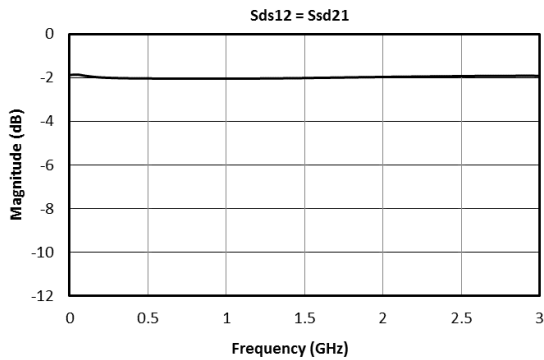


Fig. 2. Insertion loss as a mode converter

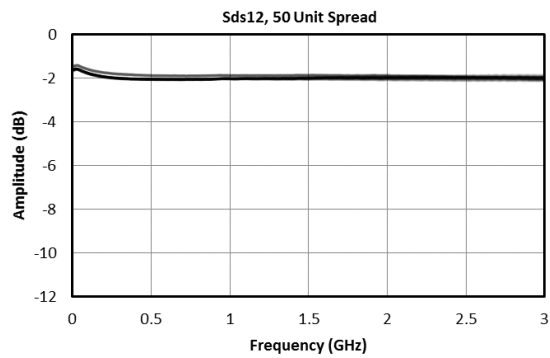


Fig. 3. Insertion loss as a mode converter across 50 units

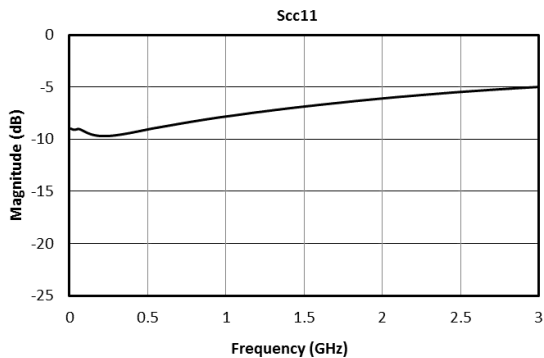


Fig. 4. Return loss of a common mode signal

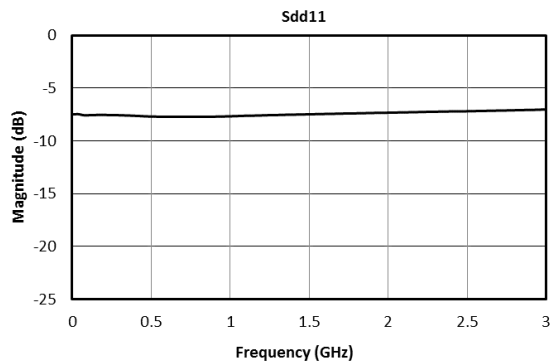


Fig. 5. Return loss of a differential signal

# HIGH POWER SURFACE-MOUNT BALUN

# BALH-0003SMG

Page 5

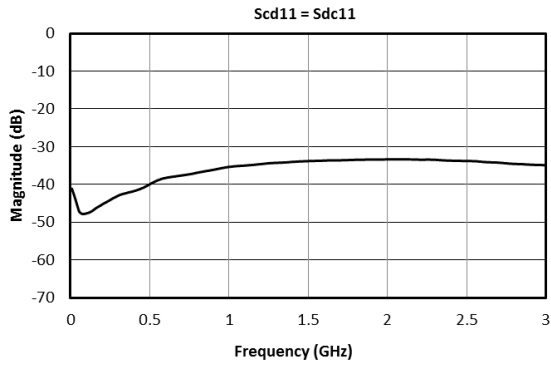


Fig. 6. Reflection converted between differential and common modes

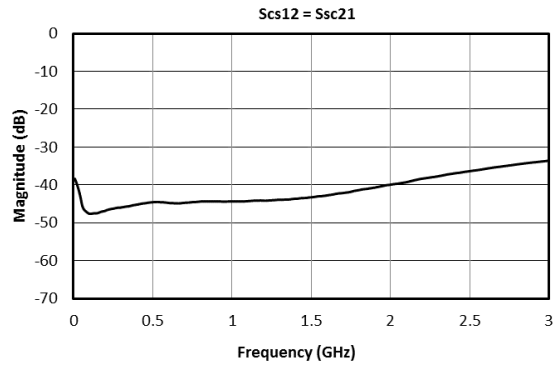


Fig. 7. Insertion loss of a common mode signal

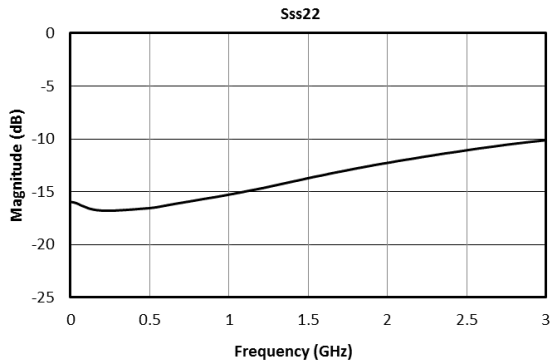


Fig. 8. Unbalanced port return loss

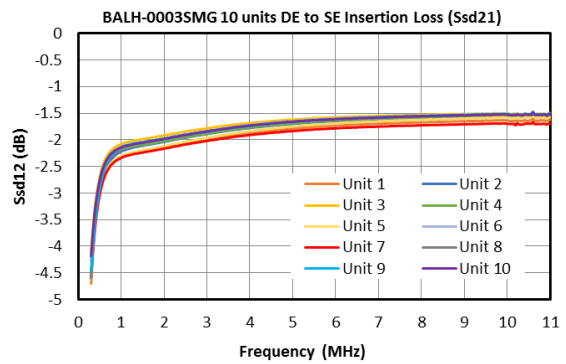


Fig. 9. Low frequency Insertion loss as a mode converter across 10 units

**Typical Performance Scattering Parameters**

Three port scattering parameters measured as three single-ended 50Ω ports showing relationship between any two ports. For example: S<sub>21</sub> and S<sub>31</sub>, often referred to as insertion loss of a balun, is the output response on ports 2 and 3 with an input stimulus on port 1.

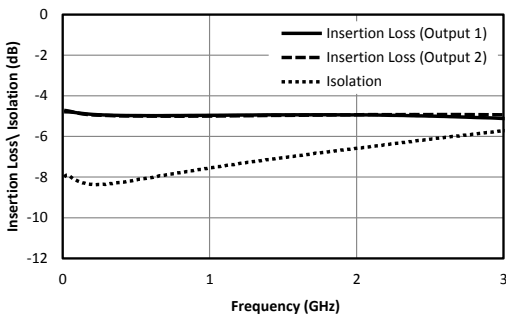


Fig. 10. Common to output port insertion loss and output to output port Isolation.

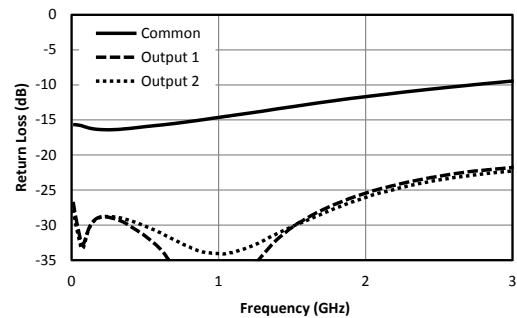


Fig. 11. Return loss for common port and output ports.

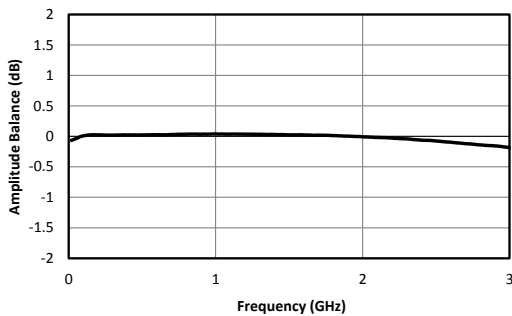


Fig. 12. Amplitude balance between output ports.

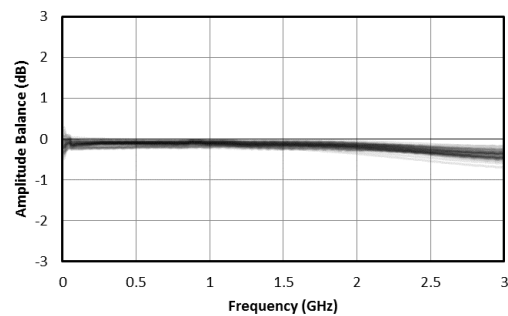


Fig. 13. Amplitude balance, 50 unit spread.

# HIGH POWER SURFACE-MOUNT BALUN

# BALH-0003SMG

Page 6

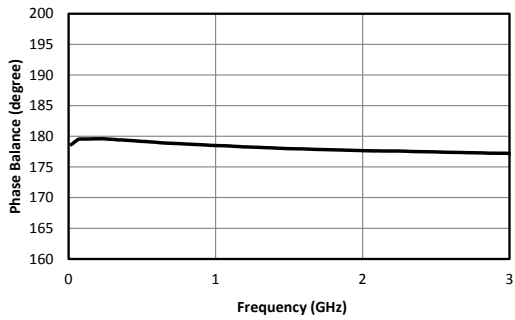


Fig. 14. Phase balance between output ports.

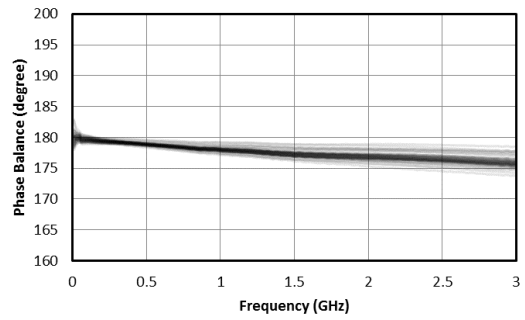


Fig. 15. Phase balance between output ports.

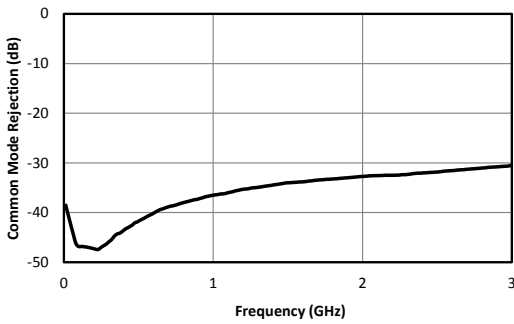


Fig. 16. Common mode rejection.

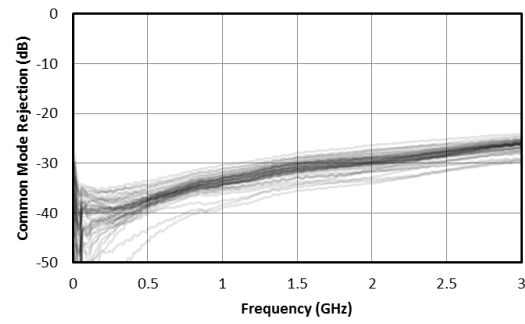


Fig. 17. Common mode rejection, 50 unit spread.

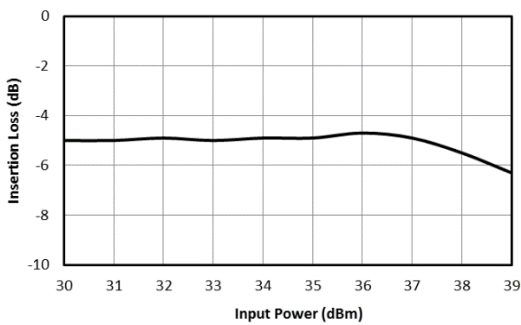


Fig. 18. Output Compression






# HIGH POWER SURFACE-MOUNT BALUN

**BALH-0003SMG**

Page 7

## DC Interface

Port	Description	DC Interface Schematic
Common Port / In (Unbalanced)	The common port is DC short to ground.	 <p>Common Port (Unbalanced)</p>
Out 1 / 0° Port (Balanced)	The 0° port is DC short to ground.	 <p>0° Port (Balanced)</p>
Out 2 / 180° Port (Balanced)	The 180° port is DC short to ground.	 <p>180° Port (Balanced)</p>

Absolute Maximum Ratings	
Parameter	Maximum Rating
DC Current	1A
RF Power Handling	33 dBm
Operating Temperature	-55°C to +100°C
Storage Temperature	-65°C to +125°C





## SURFACE-MOUNT BROADBAND BALUN

**BALH-0003SMG**

Page 9

### DATASHEET NOTES:

1. Sdd22: differential return loss of the differential port driven with a differential signal  
Sdc22: differential return loss of the differential port driven with a common signal  
Sds21: insertion loss from a single ended input to a differential output  
Scc22: common mode return loss of the differential port driven with a common signal  
Scd22: common mode return loss of the differential port driven with a differential signal  
Scs21: insertion loss from a single ended input to a common output  
Sss11: single ended return loss  
Ssd12: insertion loss from a differential signal to single ended output  
Ssc12: insertion loss from a common signal to single ended output

---

### Revision History

Revision code	Revision Date	Comment
-	February 2013	Datasheet initial Release
A	March 2019	Evaluation board outline added
B	October 2019	Mixed Mode Scattering Parameters added
C	April 2020	Unit Spread Graphs Added
D	July 2020	Specs table update
E	October 2020	Specs table update
F	May 2022	Max DC Current, Ground Plane Finish Update

*Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.*