

## LEAD-FREE / RoHS-COMPLIANT HIGH POWER BIAS TEE

**BT2-0040**

The BT2-0040 is constructed using a custom-made, resonance-free conical inductor to achieve extremely broadband performance. By minimizing the overall inductor size and using proprietary packaging techniques, the BT2-0040 is a superior option in terms of performance, reliability and ease-of-use when compared to cumbersome user-designed bias tees employing off-the-shelf conical inductors. The extremely low cutoff and resonance free operation makes the BT2-0040 suitable for biasing amplifiers, lasers, and modulators driven with high frequency data patterns.




### Features

- Broadband: 200 kHz to 40 GHz
- Low Insertion Loss
- High Power
- Non-Resonant
- Compact Size


**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	300 kHz-40 GHz		1.5	2.5
	200 kHz-300 kHz		2	
DC Port Isolation (dB)	200 kHz -1 GHz		50	
	1-40 GHz		30	
Return Loss (dB)	200 kHz-40 GHz		14	
RF Power (W)				10
DC Current (A)				2
DC Voltage (V)				50
DC Resistance (Ω)			0.5	
Inductance (uH)			68	
Capacitance (nF)			100	
Weight (g)			23.5	
Risetime /Falltime (ps) <sup>1</sup>			10	

<sup>1</sup>Specified as 90%/10%. Calculated from  $\tau_{bt}^2 = (\tau_{out}^2 - \tau_{in}^2)$

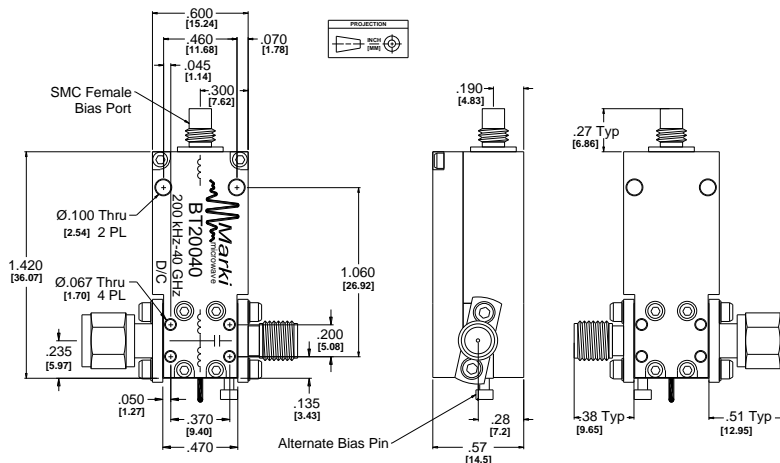

**Schematic**

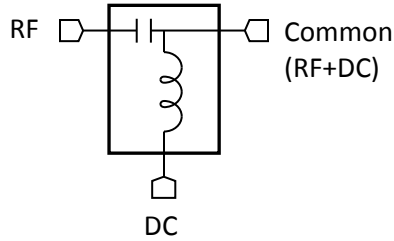

**Application Examples**

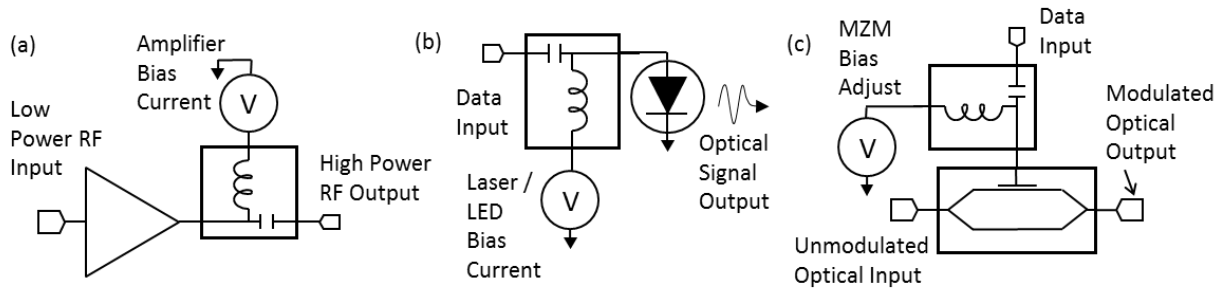


Fig. 1. Example Schematics of a) Broadband Microwave Amplifier Biasing, b) Laser/LED Biasing for Data Communication and c) Mach-Zender Modulator Biasing for Data Communication

**Typical Performance**

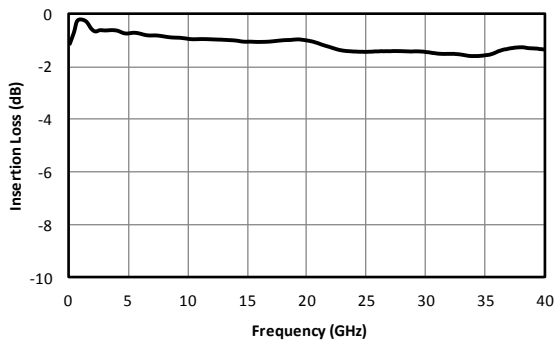


Fig. 2. RF insertion loss.

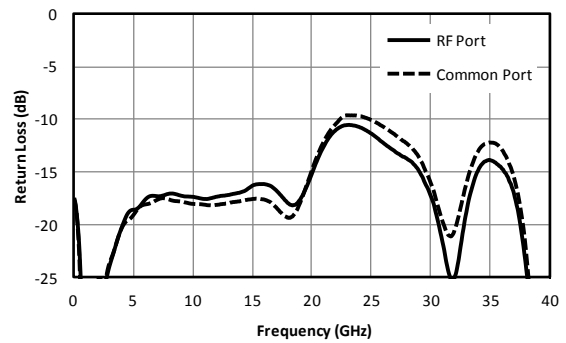


Fig. 3. Return loss.

# HIGH POWER BIAS TEE

**BT2-0040**

Page 3

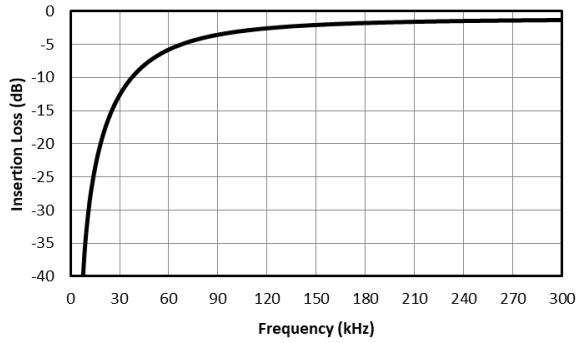


Fig. 4. Low frequency RF response.

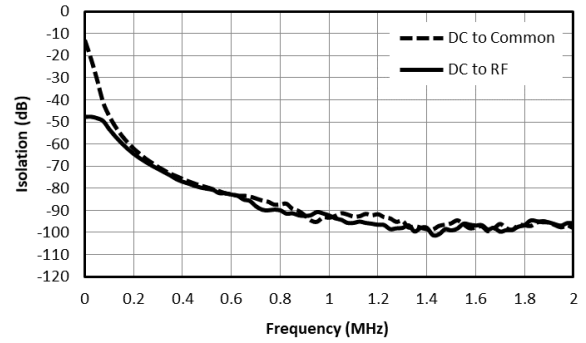


Fig. 5. Low frequency isolation.

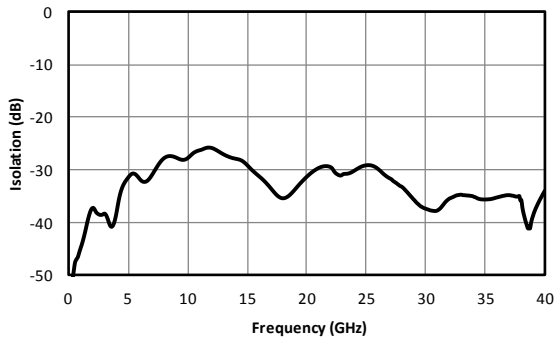


Fig. 6. DC-RF isolation.

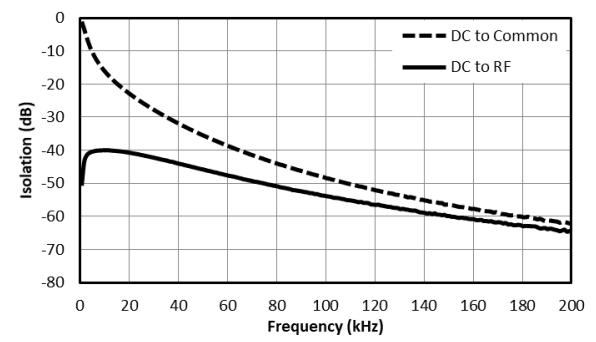


Fig. 7. Near DC isolation

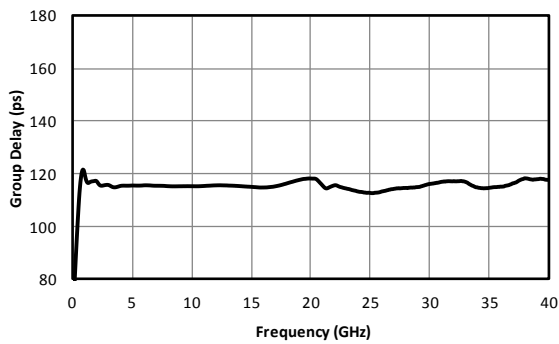


Fig. 8. Group delay.

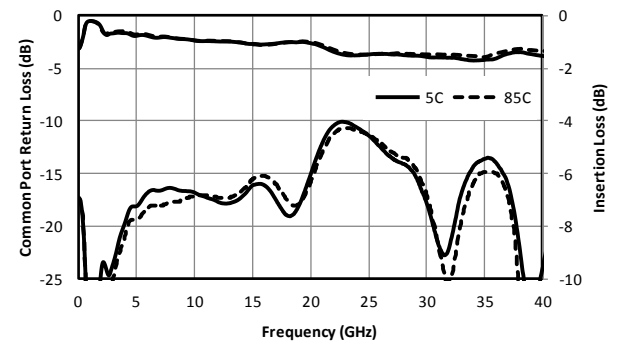


Fig. 9. Performance over temperature

**Typical Performance vs Bias Current at Low frequencies**

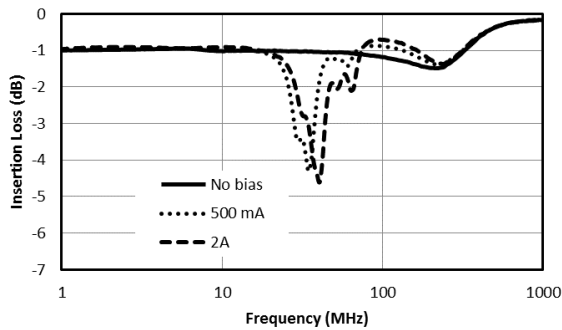


Fig. 10. Insertion Loss vs Bias Current.

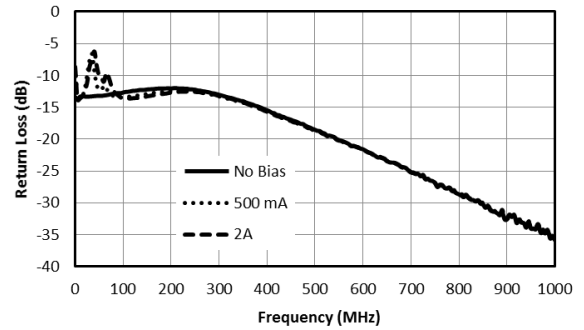


Fig. 11. Common Return Loss vs Bias Current.

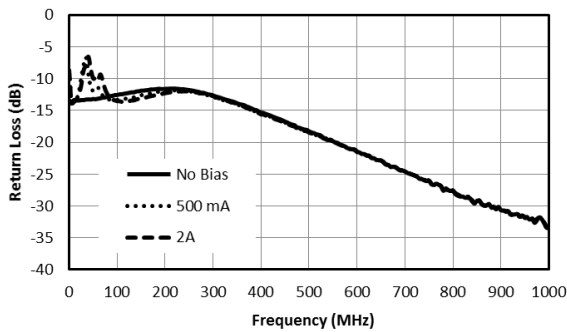


Fig. 12. RF Return Loss vs Bias Current.

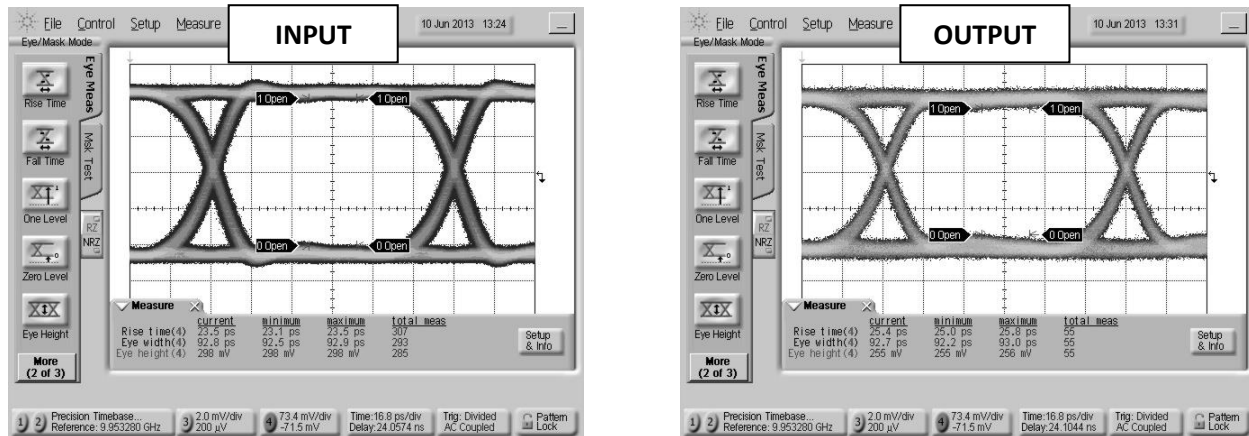


Fig. 13. Oscilloscope measurements of the BT2-0040 with a 10Gb/s PRBS pattern. Eye diagrams are taken with a 2<sup>31</sup>-1 PRBS input demonstrating minimal eye distortion/closure afforded by the extremely low frequency operation of the bias tee.

Model Number	Description
BT2-0040	200 kHz to 40 GHz High Power Bias Tee with 2.92 mm connectors <sup>1</sup> , <b>LEAD-FREE/RoHS COMPLIANT</b>

<sup>1</sup>Consult factory for other connector options.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

**Revision History**

Revision code	Revision Date	Comment
B	April 2020	Performance vs Bias current plots
C	March 2021	Updated Spec Table and Low Frequency Plots