



TWO-TONE-TERMINATOR MIXER/LO-AMPLIFIER

T3A-06

The T3A-06 is a versatile, robust, and broadband Two-Tone-Terminator mixer integrated with a sub 10 ps risetime square wave amplifier. The T3A-06 employs the most sophisticated mixer on the market today and offers unparalleled performance when compared to all other mixer technologies. The T3A-06 delivers exceptional IMD suppression with low conversion loss.

NOTE: This product is obsolete. [Please see this letter for more information.](#)



Features

- Ultra-Broadband RF, LO, and IF
- Integrated Square-Wave LO Amplifier
- Industry Leading Spurious, IP3, and P_{1dB} Performance for low LO Drive
- Application Note: [T3 Mixer Primer](#)

Electrical Specifications - Specifications guaranteed from -30 to +70°C, measured in a 50Ω system.

Parameter	LO (GHz)	RF (GHz)	IF (GHz)	Min	Typ	Max
Conversion Loss (dB)	.01-6 .01-6	.01-6 .01-6	.001-0.5 .001-4.0		6.5 7.5	8.5 10.0
LO Drive Level (dBm)				+10		+15
LO Leakage (dBm)					See Plots	
LO-RF	.01-6	.01-6			See Plot	
LO-IF	.01-6	.01-6			See Plot	
RF-IF Isolation (dB)	.01-6	.01-6			See Plot	
Input 1 dB Compression (dBm)	.01-6	.01-6			+16	
Input Two-Tone Third Order Intercept Point (dBm)	.01-6	.01-6			See Plot	
Bias Requirements (mA) ¹						
+5.0 Volts DC (+7 V max)					200	250
-5.0 Volts DC					10	20

¹It is required that the negative bias be applied before or concurrent with the positive bias to avoid damage.

*Note: EZ-Carrier T3As are not suitable for in-line reflow solder. Manual assembly only. [\(Refer to EZ Installation Notes\)](#).

Part Number Options

Please specify diode level and package style by adding to model number.				
Package Style		Examples		
Connectorized	EZP (OBS)	T3A-06EZP, T3A-06EZ-2		
Surface Mount ¹	EZ (OBS)	T3A-06 (Model)	EZP (Package)	-2 (I-Port Configuration)

¹For non-connectorized packages, specify I-port configuration by adding -1 or -2 suffix to model number. Default is -2 configuration when not specified.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.









TWO-TONE-TERMINATOR MIXER/LO AMPLIFIER

T3A-06

Page 2

LO/RF 10 MHz to 6 GHz
IF 1 MHz to 4 GHz

Typical Performance

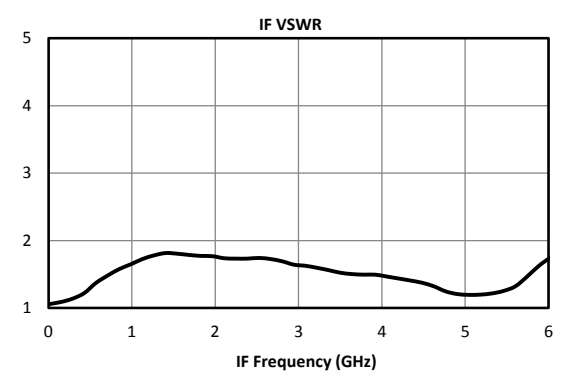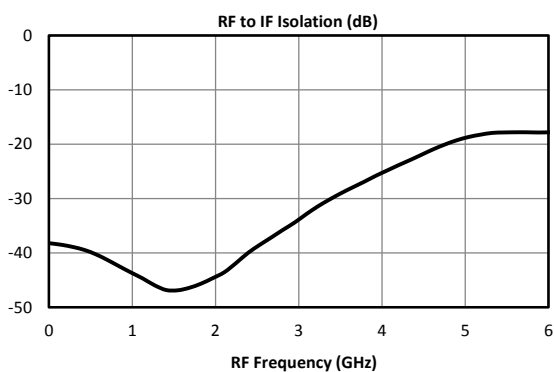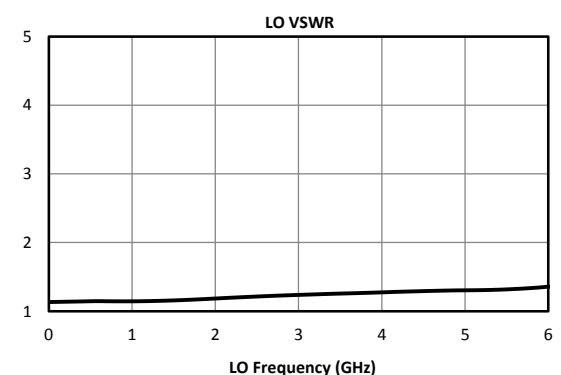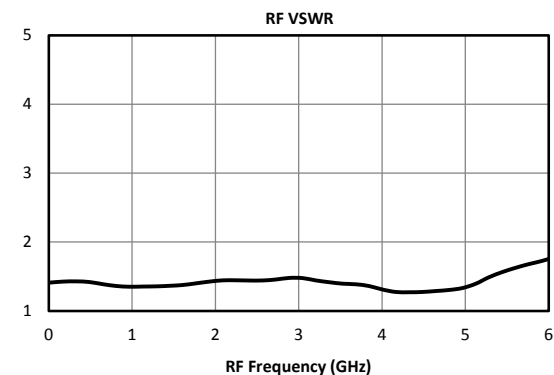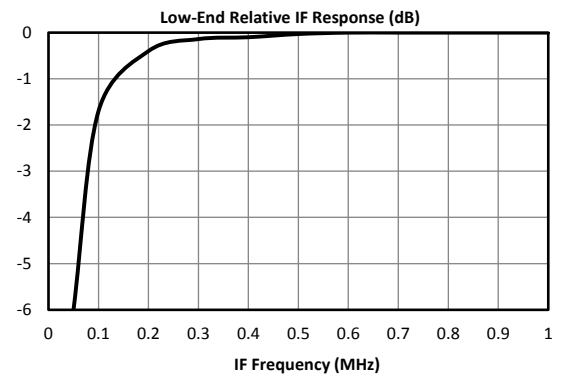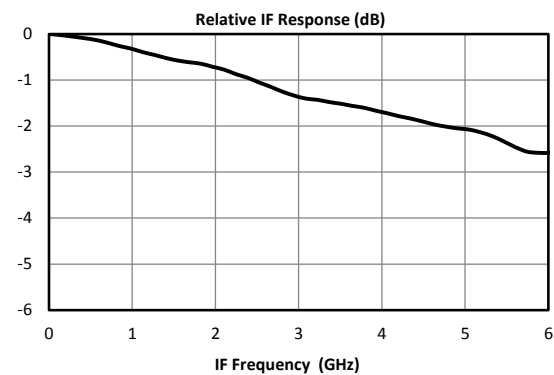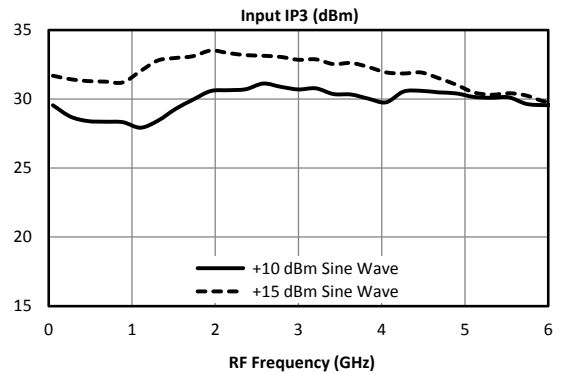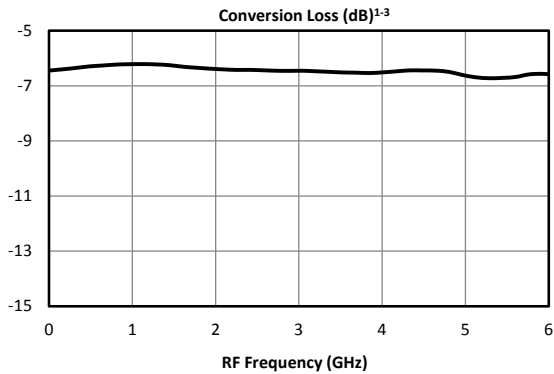







TWO-TONE-TERMINATOR MIXER

T3A-06

Page 3

LO/RF 10 MHz to 6 GHz
IF 1 MHz to 4 GHz

Typical Performance

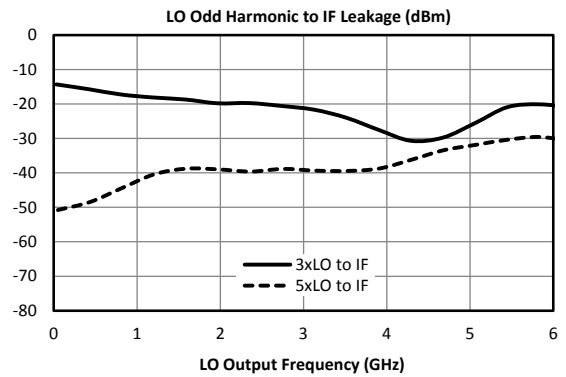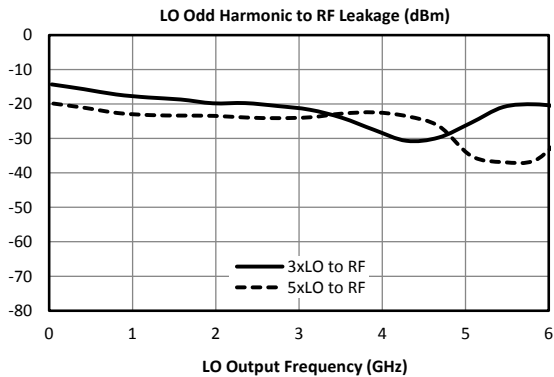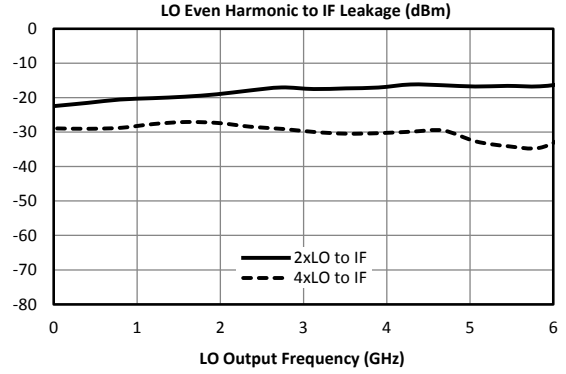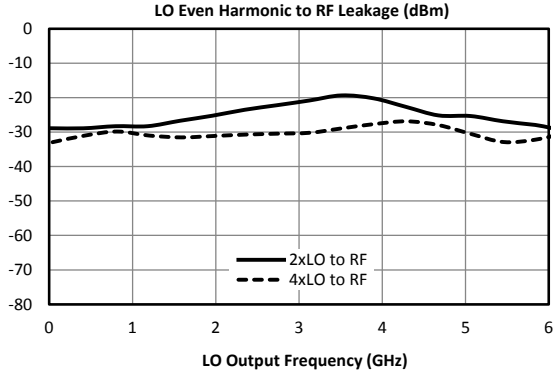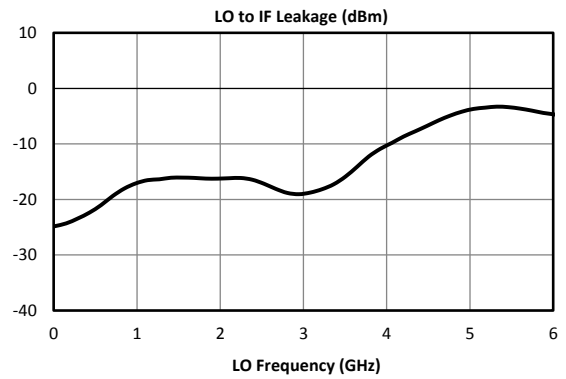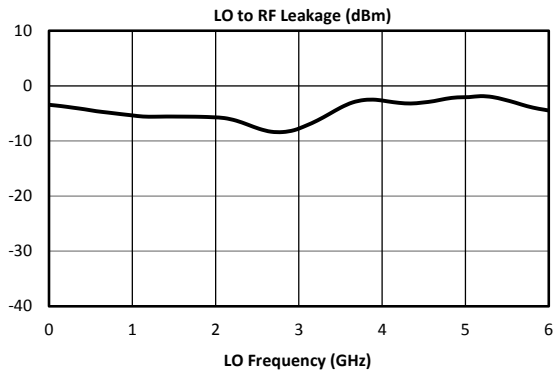



TWO-TONE-TERMINATOR MIXER

T3A-06

Page 4

**LO/RF 10 MHz to 6 GHz
IF 1 MHz to 4 GHz**


Downconversion Spurious Suppression

Spurious data is taken by selecting RF and LO frequencies ($\pm nLO \pm nRF$) within the 10 MHz to 6 GHz RF/LO bands, which create a 100 MHz IF spurious output. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by $(n-1)$, where "n" is the RF spur order. For example, the 2RFx2LO spur is 69 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is $(2-1) \times (-10 \text{ dB})$ dB lower, or 79 dBc.

Typical Downconversion Spurious Suppression (dBc): +10 (+15) dBm Sine Wave LO

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
0xRF	-----	See LO to IF Isolation and LO Harmonic to IF Isolation Plots (Page 3)				
1xRF	15 (22)	Reference	23 (29)	10 (10)	33 (32)	16 (16)
2xRF	70 (70)	71 (75)	69 (72)	72 (79)	68 (71)	66 (77)
3xRF	100 (100)	90 (93)	96 (98)	85 (91)	93 (100)	83 (92)
4xRF	>110	>110	>110	>110	>110	>110
5xRF	>120	>120	>120	>120	>120	>120

A sample downconversion spurious sweep is shown below. An LO 100 MHz higher than the RF is used to create a 100 MHz reference IF. A second LO is used to create a 2x2 spurious IF, also at 100 MHz (50 MHz fundamental IF). The difference between these two output levels is the spurious suppression in dBc. The mean value across the full 10 MHz to 6 GHz RF input band is the number shown in the table above.

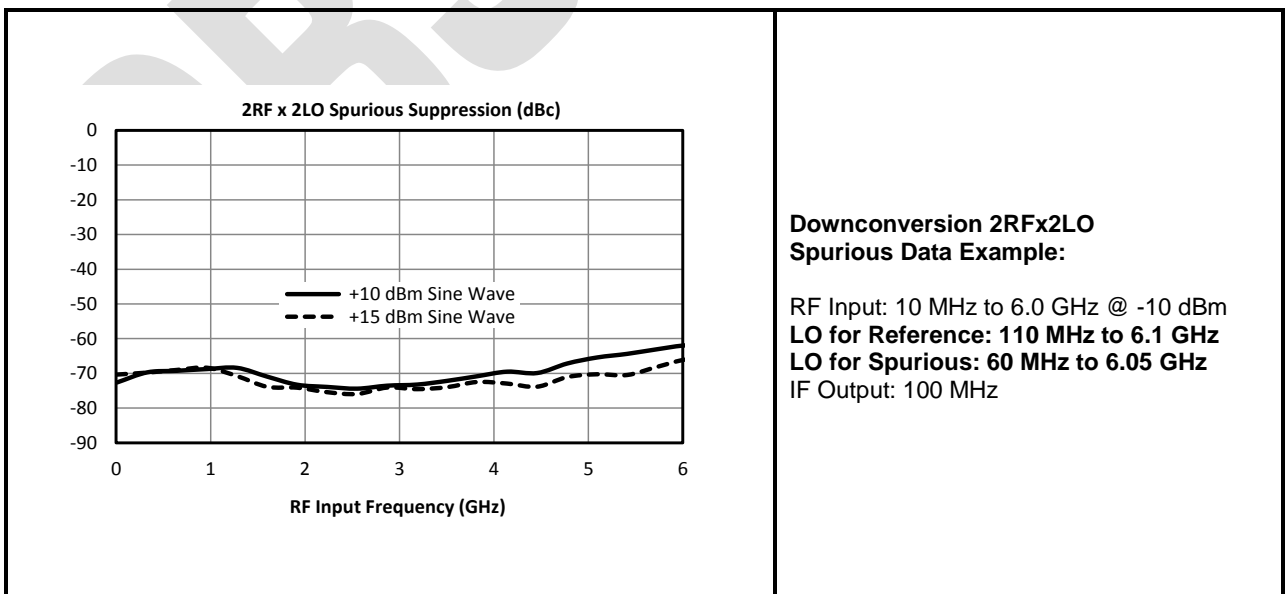

TWO-TONE-TERMINATOR MIXER

T3A-06

Page 5

**LO/RF 10 MHz to 6 GHz
IF 1 MHz to 4 GHz**


Upconversion Spurious Suppression

Spurious data is taken by mixing a 100 MHz IF with LO frequencies ($\pm mLO \pm nIF$), which creates an RF within the 10 MHz to 6 GHz RF band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by (n-1), where "n" is the IF spur order. For example, the 2IFx1LO spur is typically 69 dBc for a -10 dBm input, so a -20 dBm IF input creates a spur that is (2-1) x (-10 dB) dB lower, or 79 dBc.

Typical Upconversion Spurious Suppression (dBc): +10 (+15) dBm Sine Wave LO

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
0xIF	-----	See LO to RF Isolation and LO Harmonic to RF Isolation Plots (Page 3)				
1xIF	18 (23)	Reference	22 (30)	10 (10)	33 (31)	17 (17)
2xIF	72 (71)	68 (71)	72 (80)	72 (68)	70 (80)	65 (67)
3xIF	98 (103)	92 (99)	97 (96)	93 (93)	95 (100)	80 (91)
4xIF	>110	>110	>110	>110	>110	>110
5xIF	>120	>120	>120	>120	>120	>120

A sample upconversion spurious sweep is shown below. A 100 MHz reference IF input is used to create an RF output that is 100 MHz below the LO input ($LO-IF=RF$). A second LO (100 MHz higher) is combined with the same 100 MHz IF input ($LO-2xIF=RF$) to create the same 10 MHz to 6 GHz RF output band. The difference between these two output levels is the spurious suppression in dBc. The mean value across the full RF output band is the number shown in the table above.

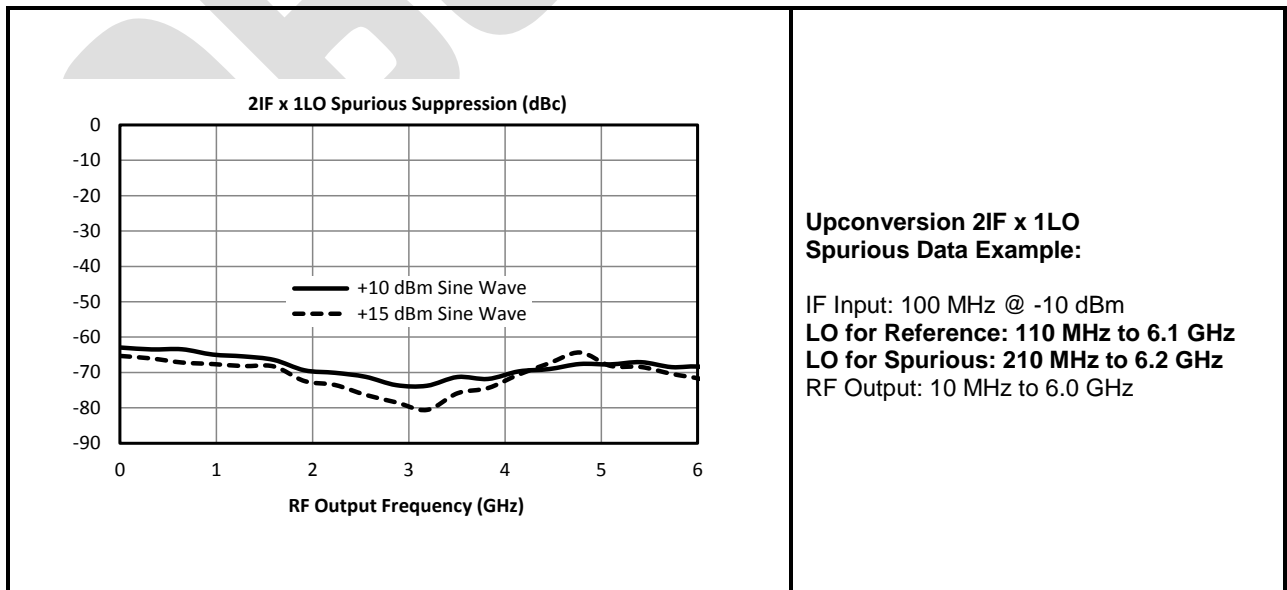





TWO-TONE-TERMINATOR MIXER

T3A-06

Page 6

LO/RF 10 MHz to 6 GHz
IF 1 MHz to 4 GHz

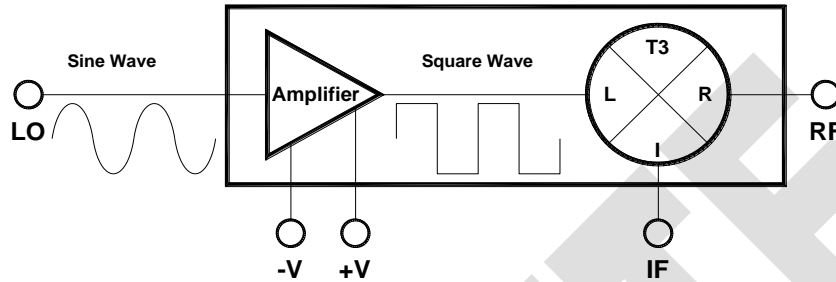

Port	Description	DC Interface Schematic
LO	The LO port is DC blocked and AC matched to 50 Ohms from 10 MHz to 6 GHz.	
RF	The RF port is DC short to ground and AC matched to 50 Ohms from 10 MHz to 6 GHz. Blocking capacitor is optional.	
IF	The IF port is DC blocked and AC matched to 50 Ohms from 1 MHz to 4 GHz.	

Absolute Maximum Ratings	
Parameter	Maximum Rating
RF DC Current	1 Amp
LO DC Current	N/A
RF Power Handling	+25 dBm
LO Power Handling	+17 dBm
Operating Temperature	-30°C to +70°C
Storage Temperature	-65°C to +125°C
ESD Sensitivity (HBM)	Class 0

DATA SHEET NOTES:

- Mixer Conversion Loss Plot IF frequency is 100 MHz.
- Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
- Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
- Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
- Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.

