

Jacket Adapter

ADP-24 Series

Features

- Convenient, easy-grip jacket for effortless loosening
- 2.40 mm to 2.40 mm adapter (Male and/or Female)
- Specified DC to 50 GHz
- Low Insertion Loss
- Excellent broadband VSWR




Electrical Specifications

| Parameter | Frequency Range | Min | Typ | Max |
|---------------------|-----------------|-----|------|------|
| Insertion Loss (dB) | DC-40.0 GHz | | 0.2 | 0.5 |
| | 40-50 GHz | | 0.5 | .75 |
| VSWR | DC-40.0 GHz | | 1.12 | 1.22 |
| | 40-50 GHz | | 1.35 | 1.5 |

Part Number Options

| Model Number | Description |
|--------------|---|
| ADPM24F24 | Male 2.40 mm/Female 2.40 mm Adapter Female 2.40 mm/Female 2.40 mm Adapter Male 2.40 mm/Male 2.40 mm Adapter |
| ADPF24F24 | |
| ADPM24M24 | |

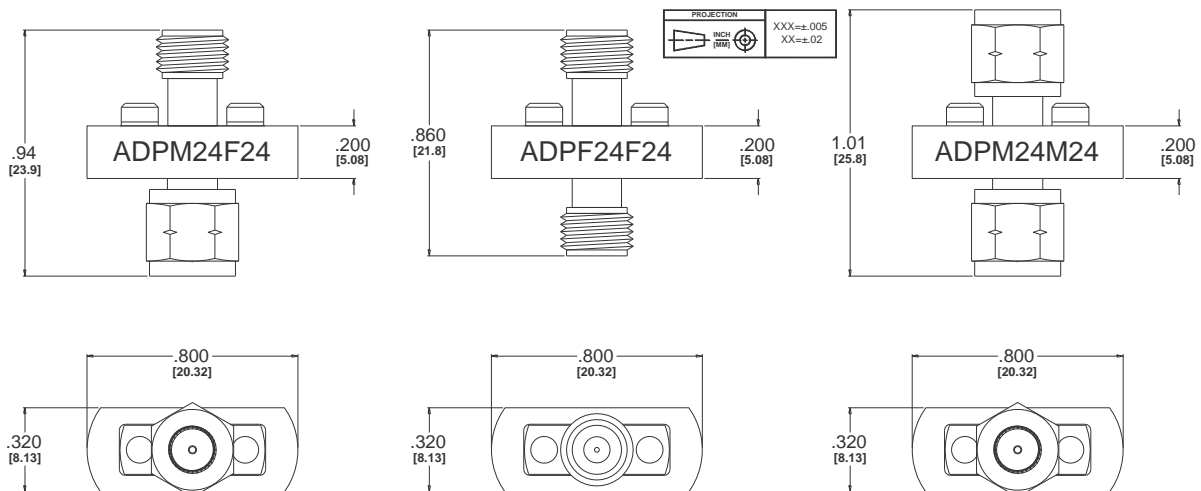

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.