

## FREQUENCY DOUBLERS

**D-0365**



### Features

- Input 1.5 to 32.5 GHz
- Output 3.0 to 65.0 GHz
- 12.5 dB Typical Conversion Loss
- 15 dBc Typical Fundamental Suppression
- 2.40 mm Connectors

**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system

Parameter	INPUT (GHz)	OUTPUT (GHz)	Min	Typ	Max	Diode Option LO drive level (dBm)
Conversion Loss (dB) F(in) 2F(out)	1.5-32.5	3.0-65.0		12.5	18.0	
Suppressions (dBc) F(in) Fundamental		1.5-32.5		15		
Input Level (dBm)						L (+10 to +13) I (+15 to +20)

### Part Number Options

<i>Please specify diode level and package style by adding to model number.</i>	
Package Style(s)	Example
<a href="#">TVV</a>	D-0365 <u>L</u> <u>TVV</u>

*Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.*

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | [info@markimicrowave.com](mailto:info@markimicrowave.com)



# FREQUENCY DOUBLERS

Page 2

**D-0365**

**Input 1.5 to 32.5 GHz  
Output 3.0 to 65.0 GHz**

Typical Performance

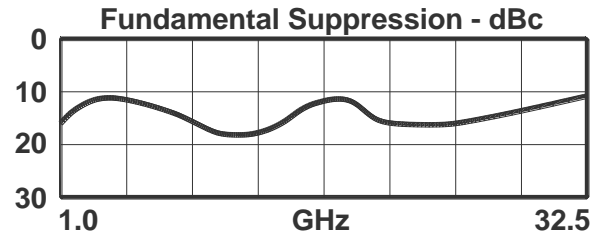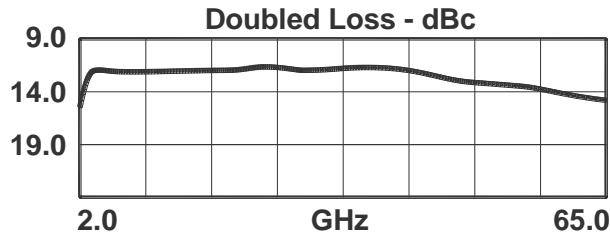

DATA SHEET NOTES:

1. Doubled Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
2. Maximum input power is +23 dBm at +25°C, derated linearly to +20 dBm at +100°C.
3. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
4. Catalog doubler circuits are continually improved. Configuration control requires custom model numbers and specifications.

*Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.*

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | [info@markimicrowave.com](mailto:info@markimicrowave.com)

[www.markimicrowave.com](http://www.markimicrowave.com)