

## LEAD-FREE / RoHS-COMPLIANT

### MINIATURE SURFACE MOUNT BIAS TEE

### BT-0026SMG

#### Features

- Frequency Range 20 MHz to 26 GHz
- 1 Watt RF Power Handling
- DC Current 500 mA
- Miniature Surface Mount Package
- [Reflow Solderable](#)




**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system

Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	20 MHz to 30 MHz		2.5	
	30 MHz to 100 MHz		1	2.5
	100 MHz to 20 GHz		1	2
	20 GHz to 26 GHz		1.5	2.5
DC Current (mA)	20 MHz to 26 GHz			500
DC Resistance(Ohms)			<1	
Capacitance (uF)			1	
Inductance (nH)			320	
DC Port Isolation (dB)			40	
DC Voltage Maximum (V)				35
RF Power Maximum (W)				1

Model Number <sup>1</sup>	Description
BT-0026SMG-1 BT-0026SMG-2	20 MHz - 26 GHz Bias Tee, Surface Mount, <b>LEAD-FREE/RoHS COMPLIANT</b>

<sup>1</sup>Default is -2 when not specified.  
Connectorized test fixtures available. Consult factory.

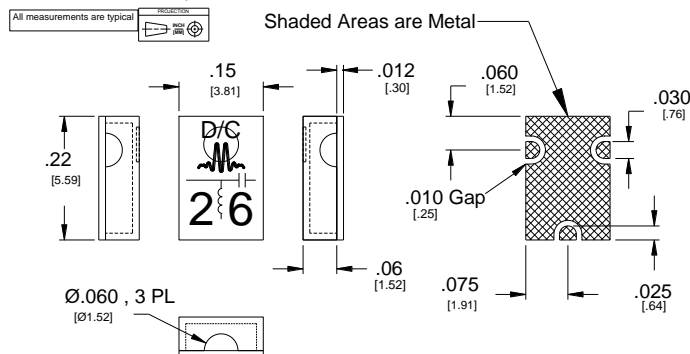

Substrate material is 12-mil thick Rogers 4003, ½ Oz Electrodeposited Cu both sides.  
ENIG, Gold 2-8 μ-inches, over solderable electroplated nickel, 100-200 μ-inches per QQ-N-290A  
[Click here for suggested PCB layout.](#)

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.9952 | Fax 408.778.4300 | sales@markimicrowave.com

**Typical Performance**

Insertion Loss data was taken using TRL de-embedding procedures.

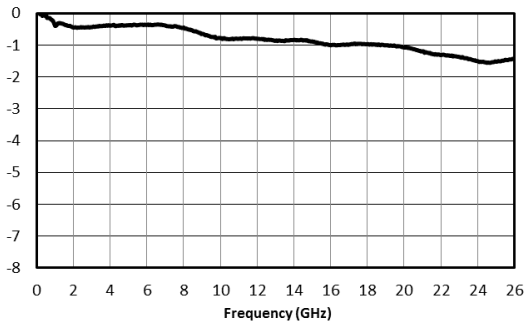


Fig. 1. RF insertion loss.

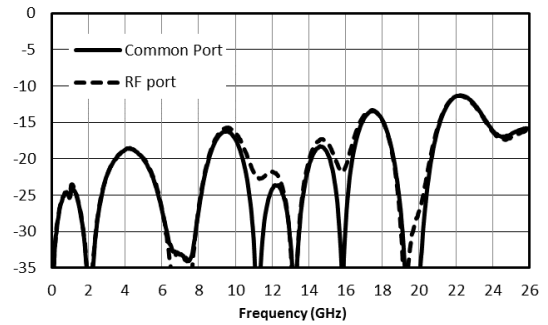


Fig. 2. Return loss

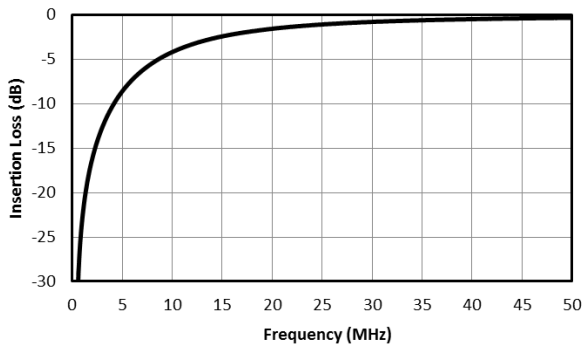


Fig. 3. Low frequency RF response

**Typical Performance vs Bias Current at Low frequencies**

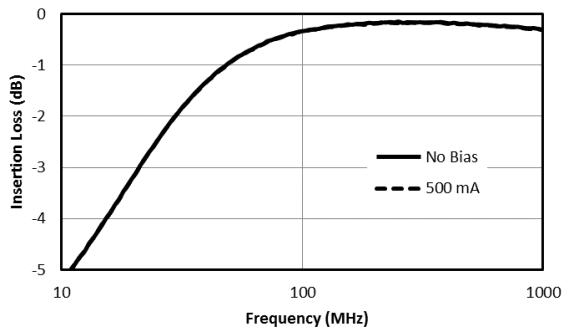


Fig. 4. Insertion Loss vs Bias Current.

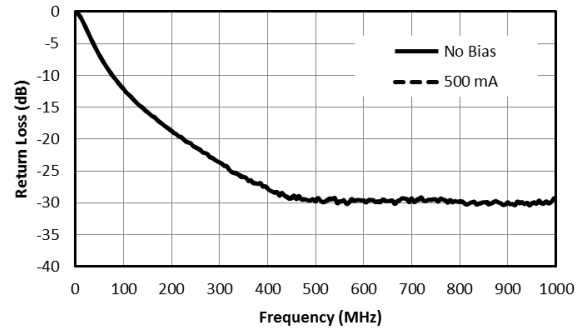


Fig. 5. Common Return Loss vs Bias Current.

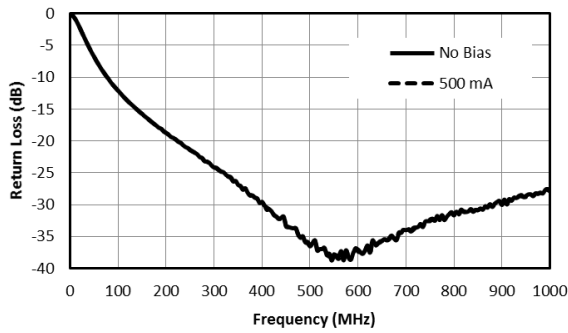



Fig.6. RF Return Loss vs Bias Current.

**MINIATURE SURFACE MOUNT BIAS TEE**


**BT-0026SMG**

Page 4

**Port Configuration Option**



**BT-0026SMG-1**



**BT-0026SMG-2**

**Revision History**

Revision code	Revision Date	Comment
-	1/2021	Datasheet Initial Release

*Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.*