



LEAD-FREE / RoHS-COMPLIANT SURFACE MOUNT BANDPASS FILTER


FB-1575SMG

Features

- Chebyshev Response
- Typical 3 dB Bandwidth, $\pm 7.5\%$
- 50 dB Stop Band Suppression
- 5 Section Filter
- [FB-1575.S2P](#)
- [Reflow Solderable](#)

Electrical Specifications – Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency (GHz)	Min	Typ.	Max
Center Frequency, f_c	15.75			
Pass Band	14.6-16.9			
Insertion Loss (dB)	15.75		2	3
Return Loss (dB)	14.6-16.9		15	
Stop Band Suppression (dB) , Lower	9.9		50	
	11.4		35	
Stop Band Suppression (dB) , Upper	20.3		50	
	18.9		35	
Impedance (Ω)			50	
RF Power (W)				1

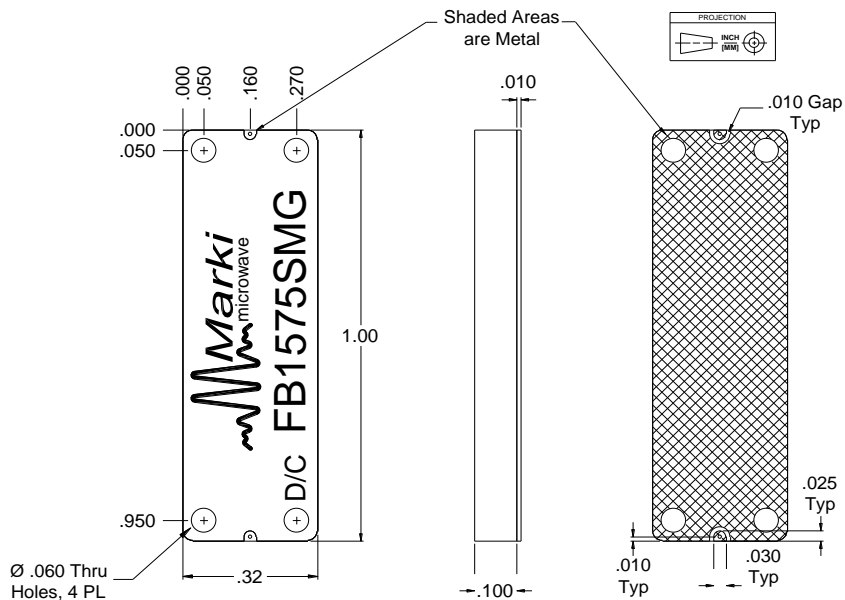

Substrate material is 10-mil thick Taconic TLY-5, ½ Oz Electrodeposited Cu.
 Gold Flash Finish, 2-8 u-inches typical, over solderable electroplated nickel, 100-200 u-inches per QQ-N-290A
 See <http://www.markimicrowave.com/menus/appnotes/an-flsm1000-pcb.pdf> for suggested PCB layout.

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

SURFACE MOUNT BANDPASS FILTER

FB-1575SM

Page 2

Typical Performance

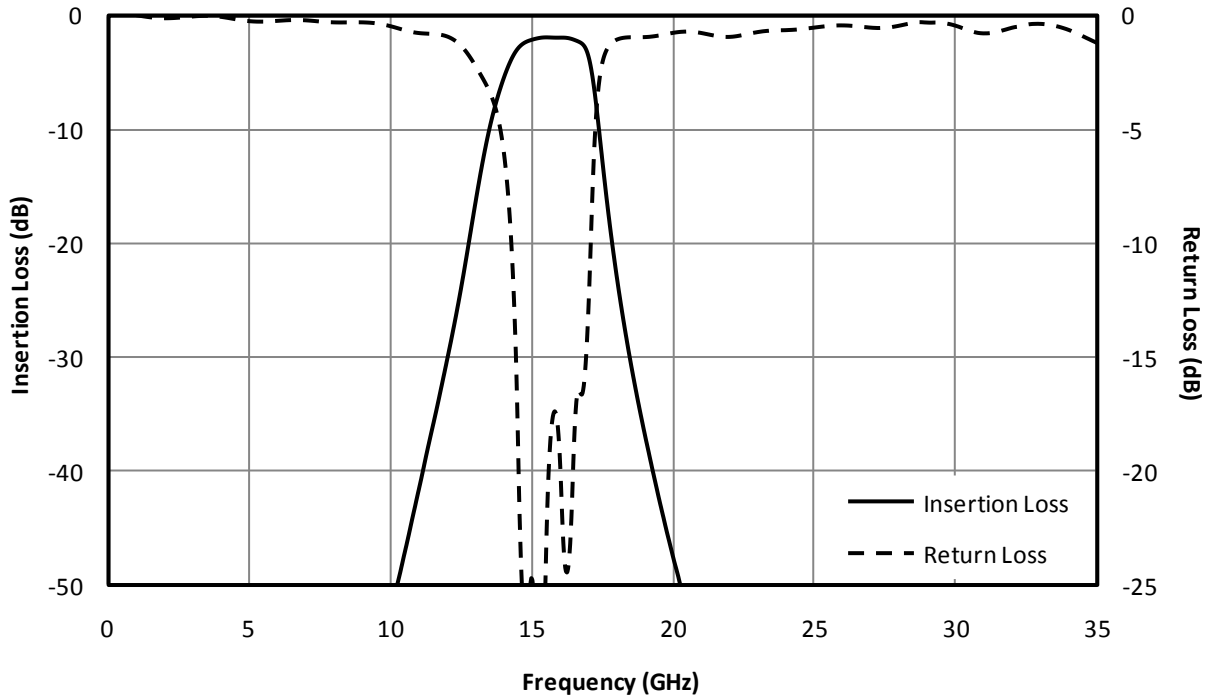


Fig. 1. Magnitude response for a typical FB-1575SM, measured in a connectorized fixture.

Model Number	Description
FB-1575SM	15.75 GHz Bandpass Filter, Surface Mount, LEAD-FREE/ROHS COMPLIANT

Connectorized test fixtures available. Consult factory.

NOTE:

Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Revision History

Revision code	Revision Date	Comment
A	June 2021	RoHS Compliant Assembly