

LEAD-FREE / RoHS-COMPLIANT

HIGHPASS FILTER

FH-2600


This general purpose high pass filter offers high stop band suppression and low insertion loss in the passband. These filters can be used to eliminate unwanted side bands during up-conversion or for removing spurious interference and noise. Filters with customized frequency cutoff, usable passband and stopband rejection are available upon customer request. Contact the factory for more details.

Features

- Low Insertion Loss
- High Stop Band Attenuation
- Compact Size
- User defined options available
- [FH-2600.s2p](#)

Electrical Specifications – Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency (GHz)	Min	Typ.	Max
Cutoff Frequency	26			
Passband Insertion Loss (dB)	26-50		1	2.5
Passband Return Loss (dB)	26-50	8		
Stopband Suppression (dB)	DC-11	70	80	
	18	40	50	
	21.5	25	30	
Impedance (Ω)			50	
RF Power (W)				15

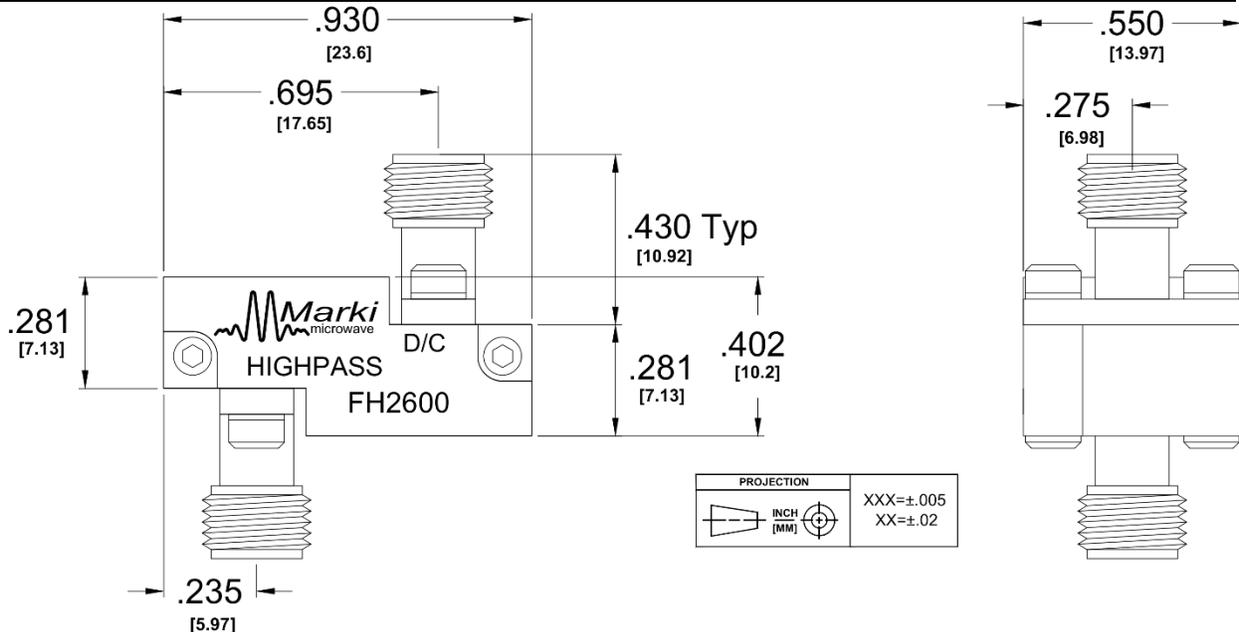

Typical Performance

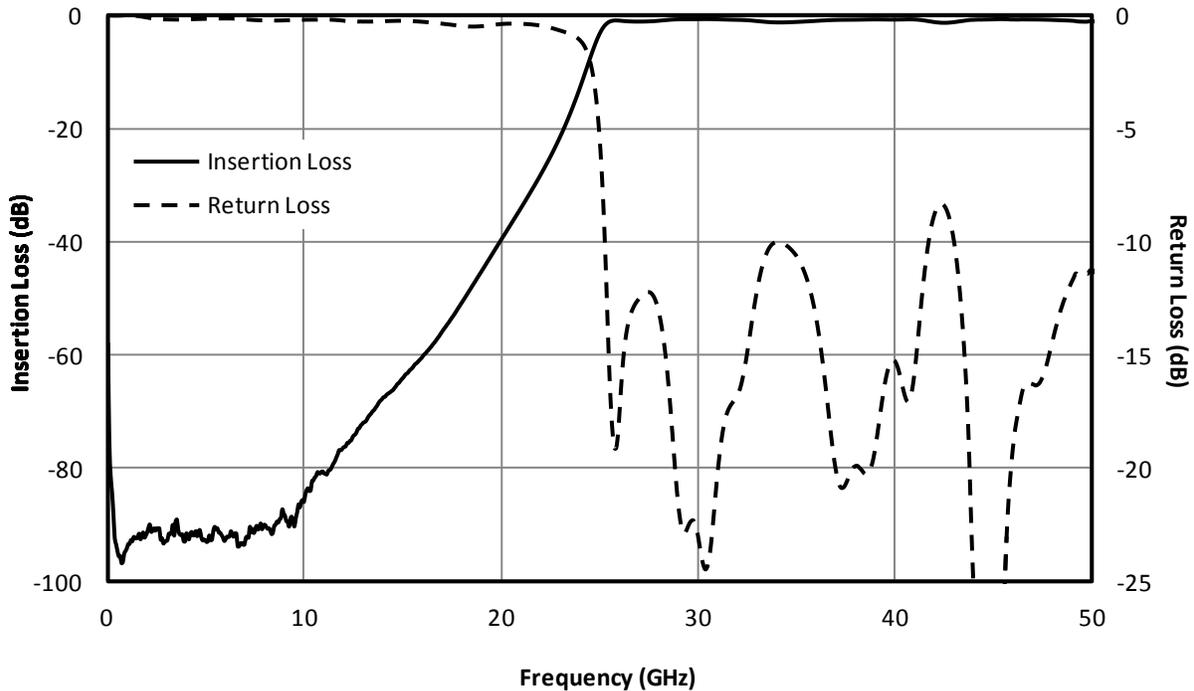


Fig. 1. Magnitude response for a typical FH-2600 Filter.

Model Number	Description
FH-2600	26 GHz Highpass Filter with 2.4 mm Female connectors ¹

¹Default is 2.4 mm female connectors. Consult factory for other connector options.

NOTE:

Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.

