



## BANDPASS FILTER

**FB-2430**


### Features

- Low Insertion Loss
- Excellent Return Loss
- High Stop Band Suppression
- Wide Stop Band
- Sharp Roll-Off
- [FB-2430.S2P](#)



**Electrical Specifications** – Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency (GHz)	Min	Typ.	Max
Center Frequency, $f_c$ (GHz)	24.3			
Passband (GHz)	21.25-27.35 ( $\pm 12.5\%$ of $f_c$ )			
Insertion Loss @ $f_c$ (dB)				3
Passband Return Loss (dB)	21.25-27.35	10	15	
Stopband Suppression (dB)	16.4, 32.1 18.1, 30.5	40 25	50 30	
Impedance ( $\Omega$ )			50	
RF Power (W)				1
Weight (g)			22	

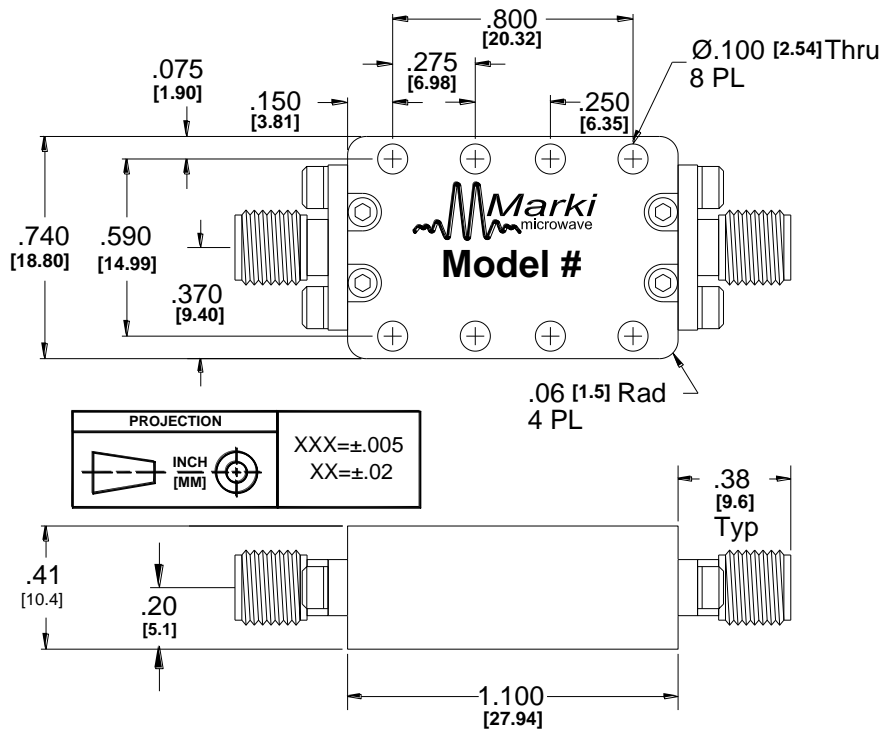

**BANDPASS FILTER**

**FB-2430**

Page 2

Typical Performance

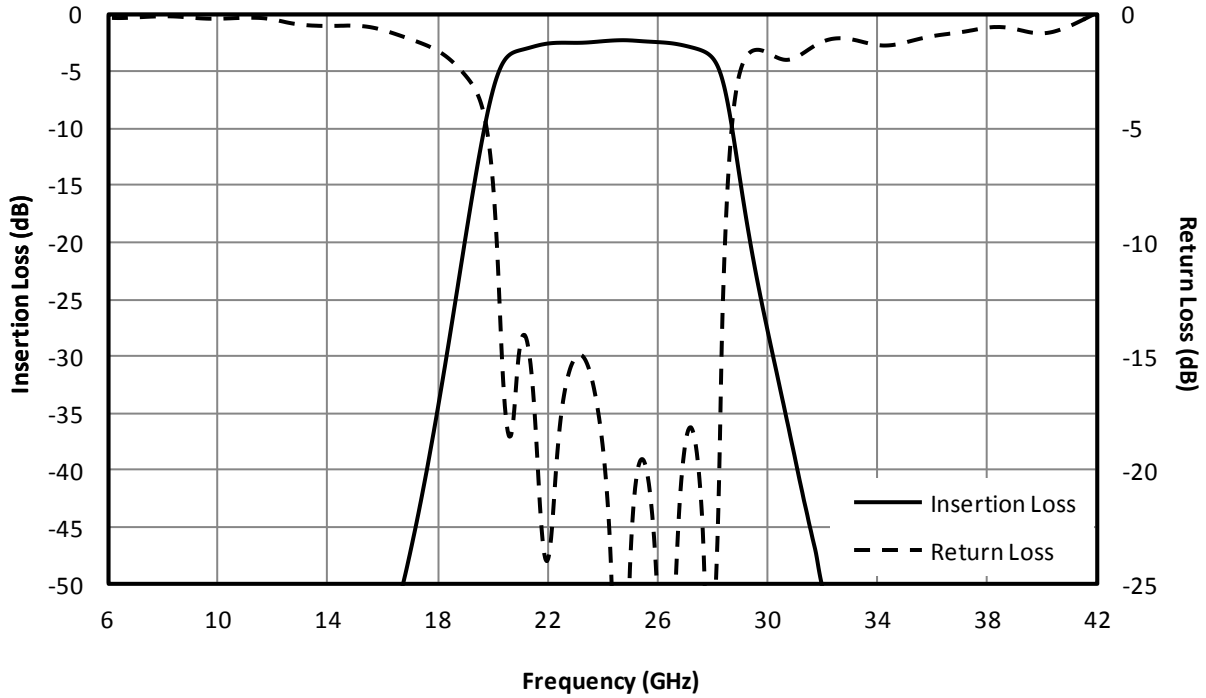


Fig. 1. Magnitude response for a typical FB-2430.

Model Number	Description
FB-2430	24.3 GHz Bandpass Filter with 2.92mm Female connectors <sup>1</sup>

<sup>1</sup>Default is 2.92mm female connectors. Consult factory for other connector options.

NOTE:

Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.

