



DOUBLE-BALANCED MIXERS

M4-0040

Features

- LO/RF 0.5 to 40.0 GHz
- IF DC to 400 MHz
- 8.0 dB Typical Conversion Loss
- 30 dB Typical LO to RF Isolation
- Super-Broadband RF and LO
- Available with 2.92 or 2.40 mm Connectors

Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

Parameter	LO (GHz)	RF (GHz)	IF (MHz)	Min	Typ	Max	Diode Option LO drive level (dBm)
Conversion Loss (dB)	1.0-40.0 0.5-40.0	1.0-40.0 0.5-40.0	DC-250 DC-400		See Plots	12.0 13.5	
Isolation (dB)							
LO-RF	0.5-40.0	0.5-40.0			See Plots		
LO-IF	0.5-40.0	0.5-40.0					
RF-IF	0.5-40.0	0.5-40.0			25		
Input 1 dB Compression (dBm)	0.5-40.0	0.5-40.0			+3		L (+10 to +13)
Input Two-Tone Third Order Intercept Point (dBm)	0.5-40.0	0.5-40.0			+13		L (+10 to +13)

Part Number Options

<i>Please specify diode level and package style by adding to model number.</i>	
Package Style(s)	Example
J (2.92 mm), JV (2.40 mm)	M4-0040 L J





DOUBLE-BALANCED MIXERS

M4-0040

Page 2

**LO/RF 0.5 to 40.0 GHz
IF DC to 400 MHz**

Typical Performance

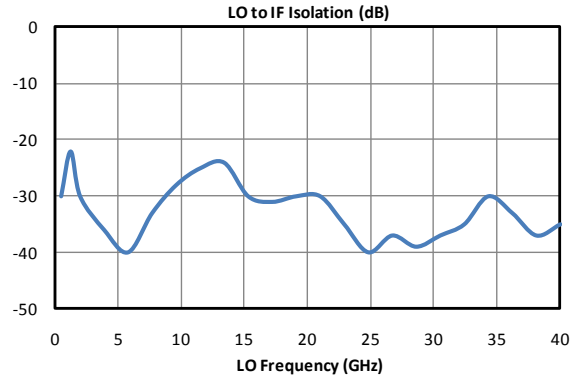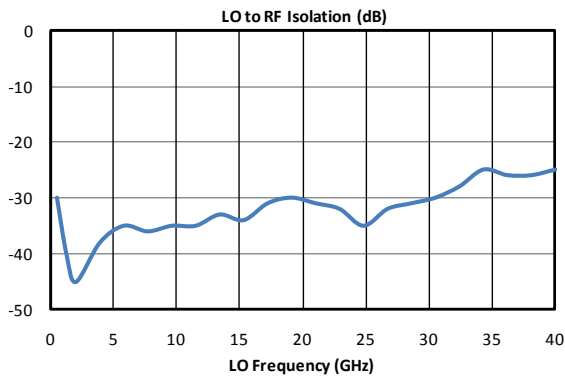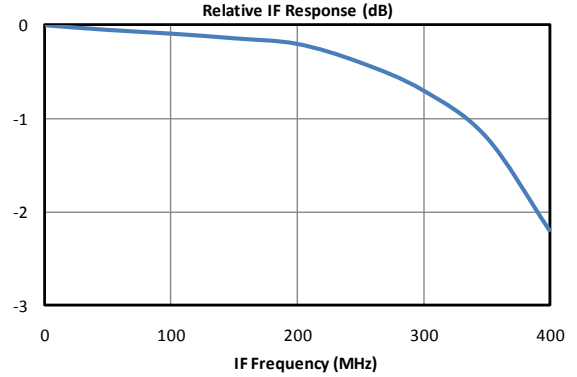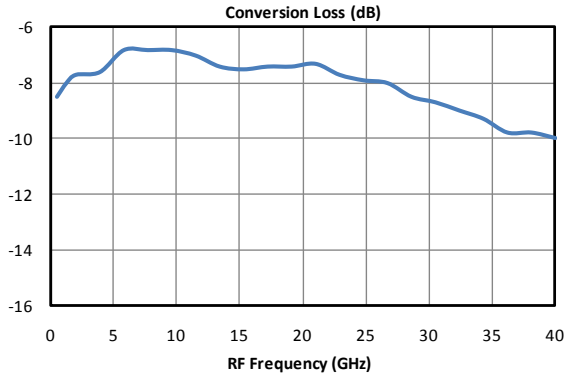

DATA SHEET NOTES:

1. Mixer Conversion Loss Plot is done with an IF frequency of 100 MHz.
2. Mixer Noise Figure typically measures within +0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
3. Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
4. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
5. Maximum input power is +23 dBm at +25°C, derated linearly to +20 dBm at +100°C.
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

Revision History

Revision code	Revision Date	Comment
-	March 2007	Datasheet initial Release
A	June 2019	H-Diode Spec Removed

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.