

WILKINSON POWER DIVIDER

PD-0434SM

Features

- 4 to 34 GHz In-phase Power Splitting
- 1.5 dB Typical Insertion Loss
- 20 dB Typical Output to Output Isolation
- Surface Mount Package
- [Microwave Power Dividers & Couplers App Note](#)




Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter ¹	Frequency Range (GHz)	Min	Typ	Max
Nominal Power Splitting (dB)	4 to 34		3	
Nominal Phase Shift (Degrees)			0	
Amplitude Balance (dB)			±0.25	
Phase Balance (Degrees)			±3	
Excess Insertion Loss (dB) ²			1.5	3
VSWR			1.5	
Isolation (dB)			20	
Power (W)				

¹Specifications guaranteed when operated in a 50Ω system.

²Excess Insertion Loss = (Common Port to Output Port Insertion Loss) – 3 dB.

Model Number	Description
PD-0434SM	4 - 34 GHz Power Divider, Surface Mount

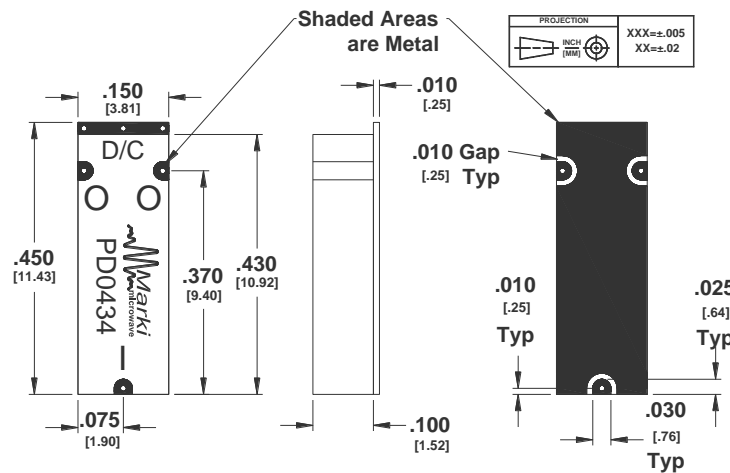

Substrate material is 5-mil thick Rogers 5880 or Taconic TLY-5, ½ Oz Electrodeposited Cu.

I/O Pads & Ground Plane Finish is 100-300 μ-inches 60/40 Pb/Sn Solder Plate, over Cu.

See <http://www.markimicrowave.com/menus/appnotes/an-btsml-pcb.pdf> for suggested PCB layout.

Drying bake required after aqueous wash.

WILKINSON POWER DIVIDER

PD-0434SM

Page 2

Typical Performance

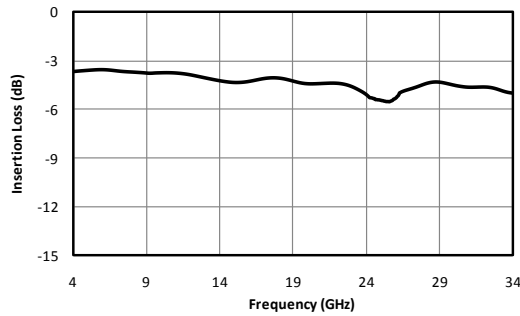


Fig. 1. Common port to output port insertion loss.

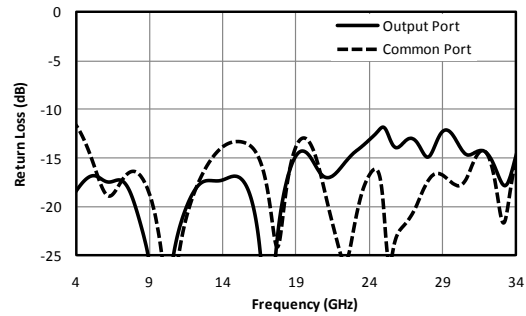


Fig. 2. Return loss for output and common ports.

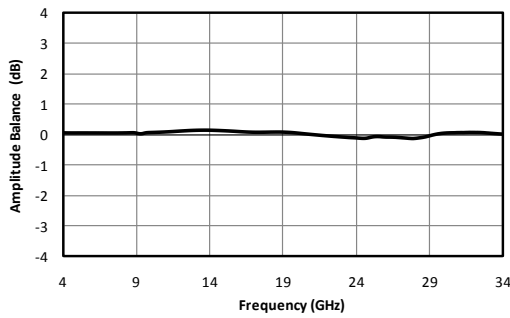


Fig. 3. Amplitude balance between output ports.

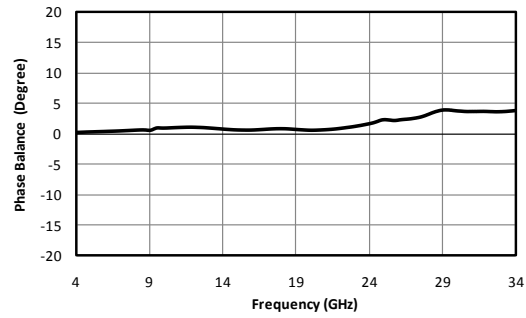


Fig. 4. Phase balance between output ports.

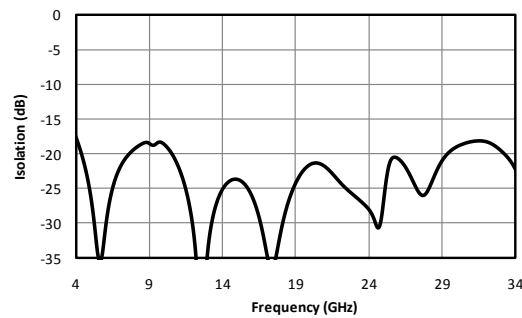


Fig. 5. Isolation between output ports.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.