

## LEAD-FREE / RoHS-COMPLIANT

### 3 dB QUADRATURE HYBRID

### QH-0R518

The QH-0R518 is a 0.5-18 GHz, multi-purpose broadband 3dB quadrature hybrid. The multisection tri-plate stripline design exhibits excellent amplitude balance with broadband quadrature phasing (90°) between the output ports. Applications include single sideband upconverters, image rejection downconverters, IQ modulators, balanced amplifiers, microwave correlators and microwave Butler matrices. Custom designs are also available; contact the factory for details.



- High isolation
- Low VSWR
- [Microwave Power Dividers & Couplers App Note](#)


#### Electrical Specifications

Parameter <sup>1</sup>	Frequency Range (GHz)	Min	Typ	Max	
Coupling (dB)	0.5 to 18		3		
Phase Shift (Degrees)			90		
Amplitude Balance (dB) <sup>2</sup>				±0.5	
Phase Balance (Degrees)				±3	
Excess Insertion Loss (dB) <sup>3</sup>				1.5	
VSWR				1.5	
Isolation (dB)				20	
CW Power (W)					20
Weight (g)				225	

<sup>1</sup>Specifications guaranteed when operated in a 50Ω system.

<sup>2</sup>Maximum amplitude *differential* is twice the magnitude of the amplitude *balance* (see Fig. 3).

<sup>3</sup>Excess Insertion Loss = (Input Port to Output Port Insertion Loss) – 3 dB.

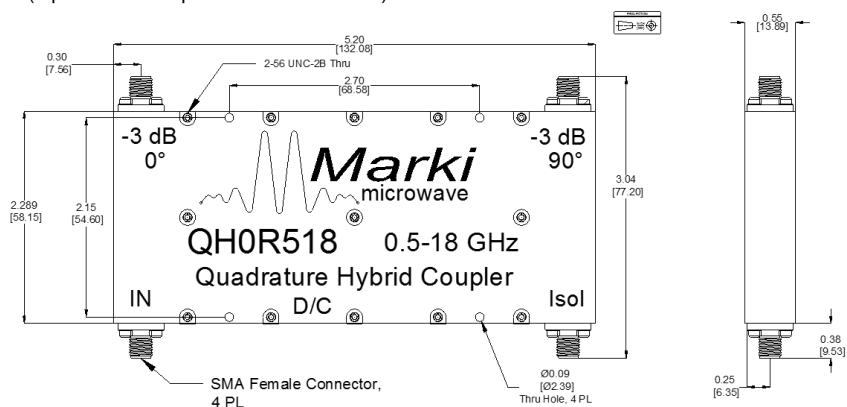

### 3 dB QUADRATURE HYBRID

### QH-0R518

### Typical Performance

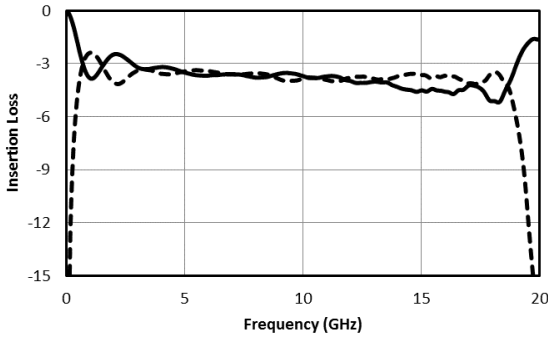


Fig. 1. Through and coupled line insertion loss.

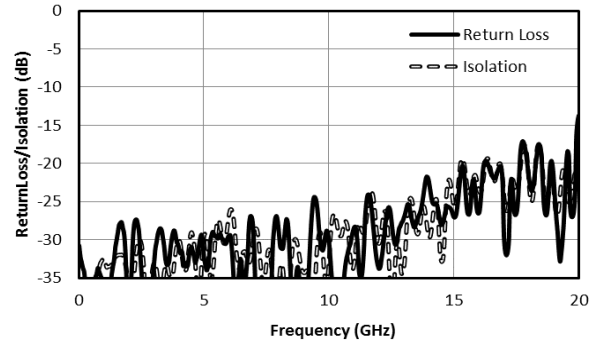


Fig. 2. Return loss and isolation (all ports 50 Ω terminated).

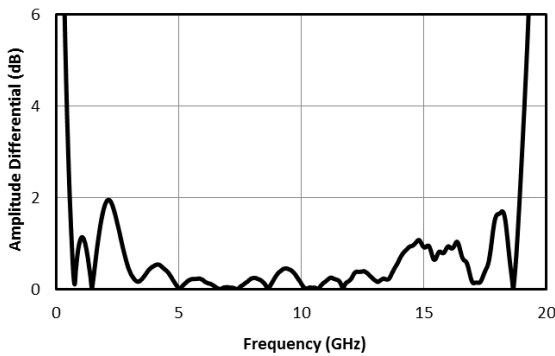


Fig. 3. Amplitude difference between the 0° and 90° output ports.

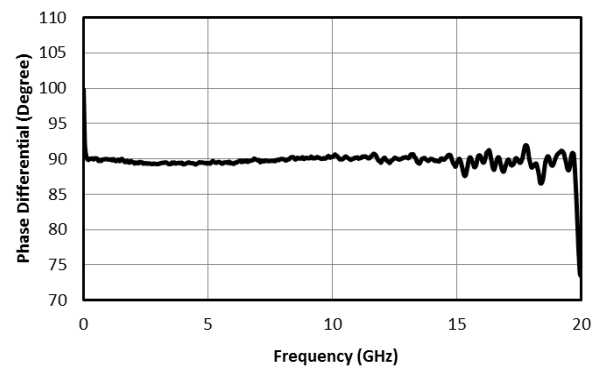


Fig. 4. Phase difference between the 0° and 90° output ports.

Model Number	Description
QH-0R518	0.5-18 GHz 3 dB Quadrature Hybrid with SMA connectors <sup>1</sup> , <b>LEAD-FREE/RoHS COMPLIANT</b>

<sup>1</sup>Default is SMA female connectors. Consult factory for other connector options.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.

