

## LEAD-FREE / RoHS-COMPLIANT

### BIAS TEE

### BT-0050

The BT-0050 is constructed using a custom-made, resonance-free conical inductor to achieve extremely broadband performance. By minimizing the overall inductor size and using proprietary packaging techniques, the BT-0050 is a superior option in terms of performance, reliability and ease-of-use when compared to cumbersome self-made bias tees employing off-the-shelf conical inductors. The extremely low cutoff and resonance free operation makes the BT-0050 suitable for biasing amplifiers, lasers, and modulators driven with high frequency data patterns.




#### Features


- Broadband: 4 kHz to 50 GHz
- Low Insertion Loss
- Non-Resonant
- Compact Size

**Electrical Specifications** - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	4 kHz-50 GHz		1.8	2.5
DC Port Isolation (dB)			30	
Return Loss (dB)			12	
RF Power (W)				1
DC Current (mA)				500
DC Voltage (V)				30
DC Resistance (Ω)			3	
Inductance (uH)				1000
Capacitance (uF)				1.1
Weight (g)				23.5
Risetime/Falltime (ps) <sup>1</sup>			10	

<sup>1</sup>Specified as 90%/10%. Calculated from  $\tau_{bt}^2 = (\tau_{out}^2 - \tau_{in}^2)$

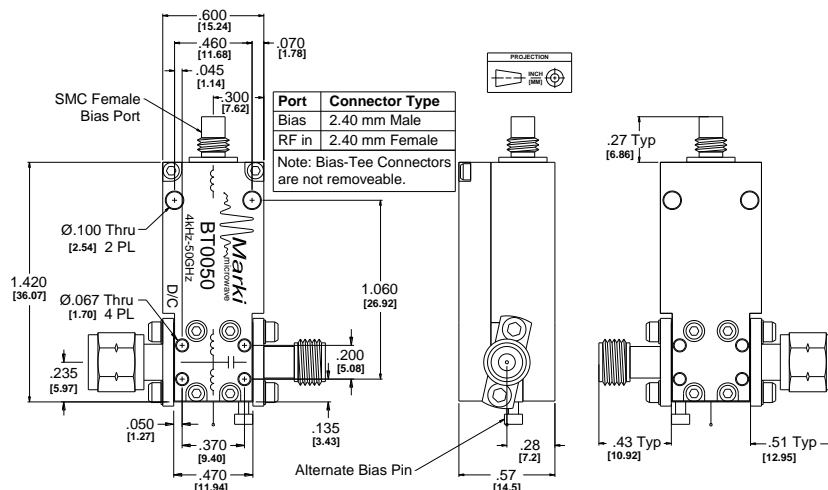

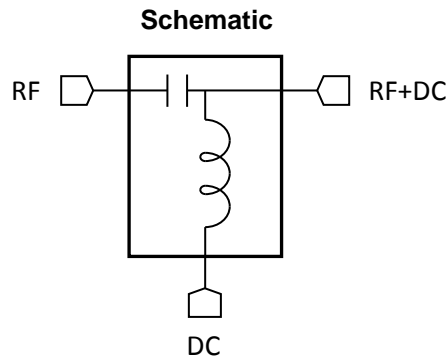

**Application Examples**

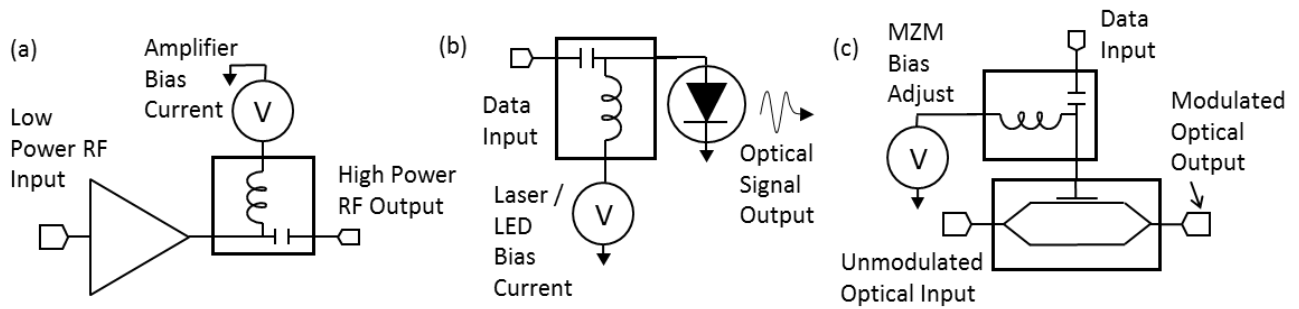


Fig. 1. Example Schematics of a) Broadband Microwave Amplifier Biasing, b) Laser/LED Biasing for Data Communication and c) Mach-Zender Modulator Biasing for Data Communication

**Typical Performance**

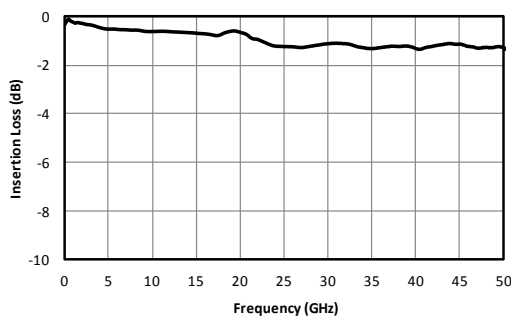


Fig. 2. RF insertion loss.

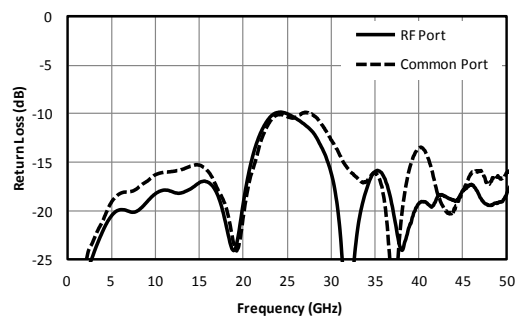


Fig. 3. Return loss.

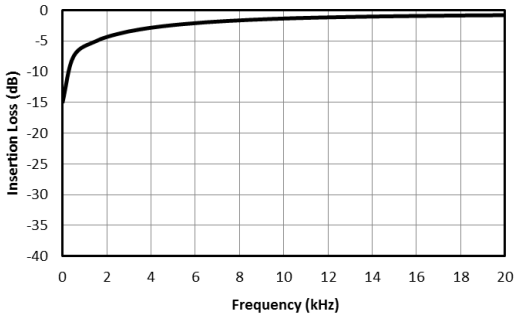


Fig. 4. Low frequency RF response.

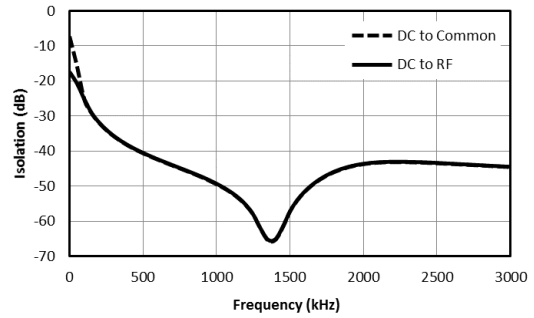


Fig. 5. Low frequency isolation.

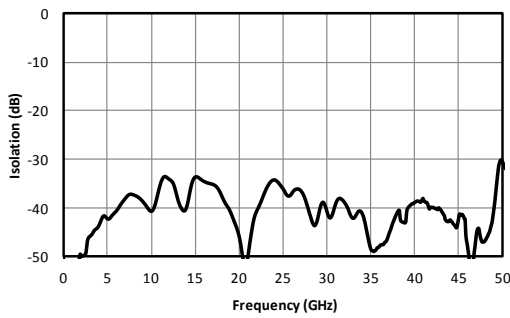


Fig. 6. DC-RF isolation.

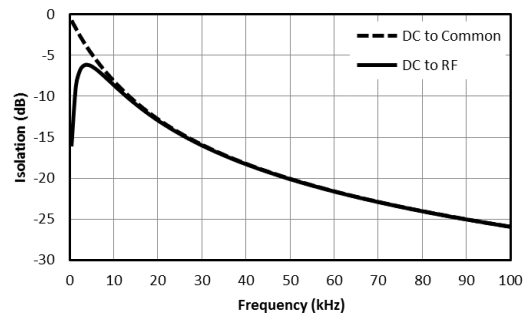


Fig. 7. Near DC isolation

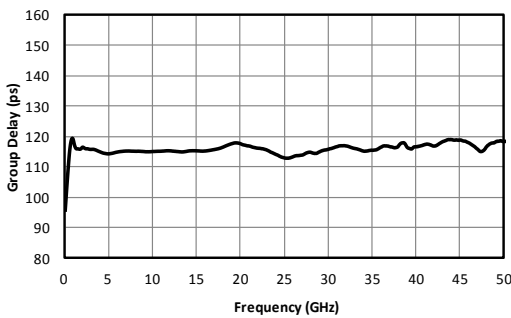


Fig. 8. Group delay.

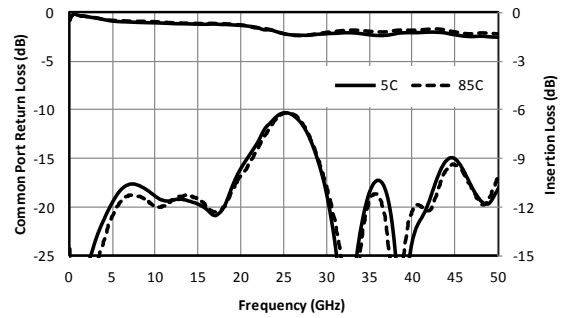


Fig. 9. Performance over temperature

**Typical Performance vs Bias Current at Low frequencies**

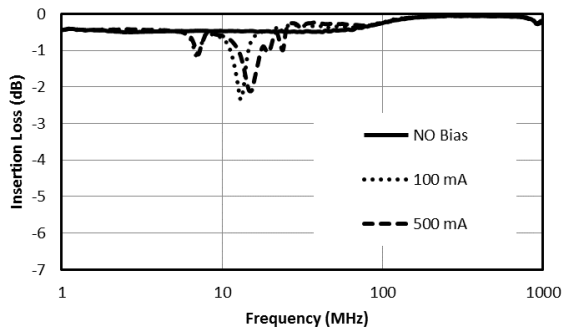


Fig. 10. Insertion Loss vs Bias Current.

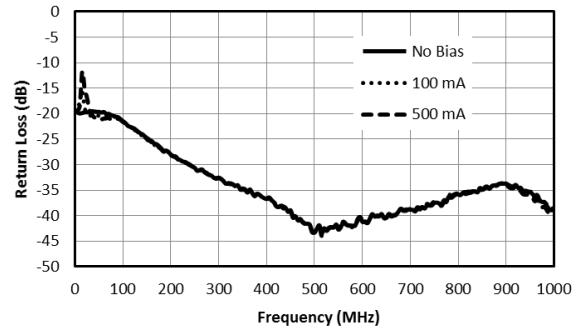


Fig. 11. Input Return Loss vs Bias Current.

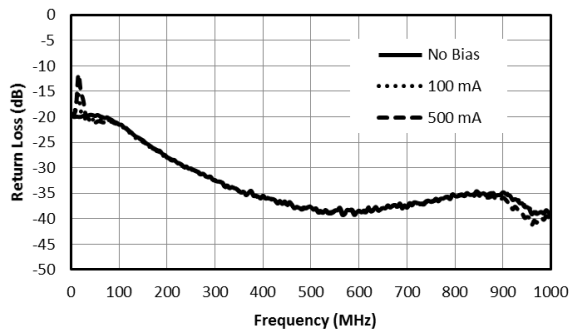


Fig. 12. Output Return Loss vs Bias Current.

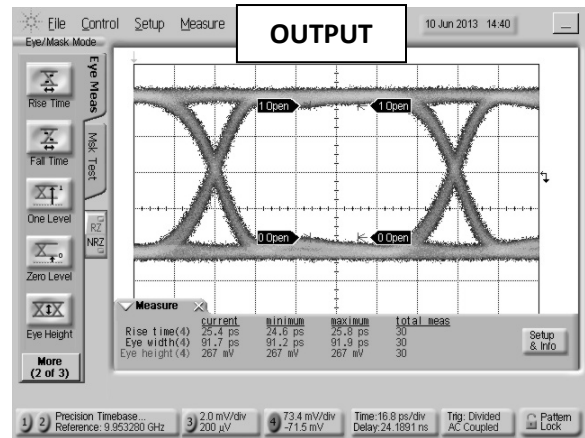
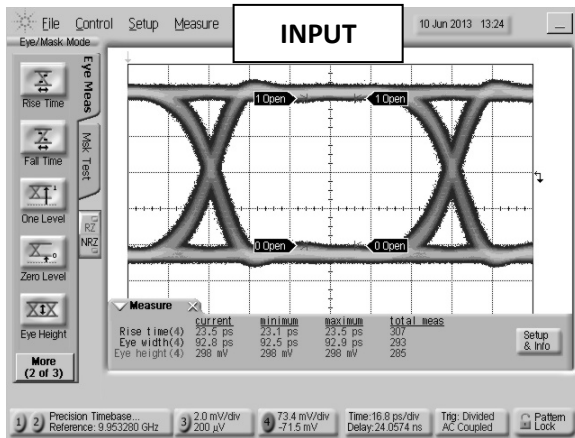


Fig. 13. Oscilloscope measurements of the BT-0050 with a 10Gb/s PRBS pattern. Eye diagrams are taken with a  $2^{31}-1$  PRBS input demonstrating minimal eye distortion/closure afforded by the extremely low frequency operation of the bias tee.

Model Number	Description
BT-0050	4 kHz to 50 GHz Bias Tee with 2.4 mm connectors <sup>1</sup> , <b>LEAD-FREE/RoHS COMPLIANT</b>

<sup>1</sup>Consult factory for other connector options.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

**Revision History**

Revision code	Revision Date	Comment
-	October 2010	Datasheet Initial Release
A	February 2019	Corrected Low Frequency plots
B	April 2020	Performance vs Bias current plots
C	June 2020	Updated Outline Drawing