

1. Device Overview

1.1 General Description

MMIC IQ mixer. This is an ultra-broadband mixer spanning 40 to 67 GHz on the RF and LO ports with an IF from DC to 20 GHz. Up to 25 dB of image rejection is available due to the excellent phase and amplitude balance of its on-chip LO quadrature hybrid. This product is available as a connectorized module. Contact factory for information regarding wire bondable die.



Module


1.2 Electrical Summary

Parameter	Typical	Unit
RF/LO Frequency Range	40 - 67	GHz
IF Frequency Range	DC - 20	GHz
I+Q Conversion Loss	9	dB
Image Rejection	35	dB
LO-RF Isolation	33	dB

1.3 Applications

- Single Side Band & Image Rejection Mixing
- IQ Modulation/Demodulation
- Vector Amplitude Modulation
- Band Shifting

1.4 Functional Block Diagram



1.5 Part Ordering Options¹

Part Number	Description	Package	Green Status	Product Lifecycle	Export Classification
MMIQ-4067LU	Connectorized module	U	RoHS	Active	EAR99

¹ Refer to our [website](#) for a list of definitions for terminology presented in this table.

Table of Contents

1. Device Overview	1	3.1 Absolute Maximum Ratings.....	4
1.1 General Description.....	1	3.2 Package Information	4
1.2 Electrical Summary.....	1	3.3 Recommended Operating Conditions .	4
1.3 Applications	1	3.4 Sequencing Requirements	4
1.4 Functional Block Diagram	1	3.5 Electrical Specifications	5
1.5 Part Ordering Options.....	1	3.6 Typical Performance Plots	5
2. Port Configurations and Functions	3	4. Mechanical Data	9
2.1 Port Diagram	3	4.1 U Package Outline Drawing.....	9
2.2 Port Functions	3		
3. Specifications	4		


Revision History

Revision Code	Revision Date	Comment
-	April 2018	Datasheet Initial Release
A	October 2019	Updated Max Power Spec






2. Port Configurations and Functions

2.1 Port Diagram

A top-down view of the MMIQ-4067L's U package outline drawing is shown below. The mixer may be operated as either a downconverter or an upconverter. Use of the RF or IF as the input or output port will depend on the application.

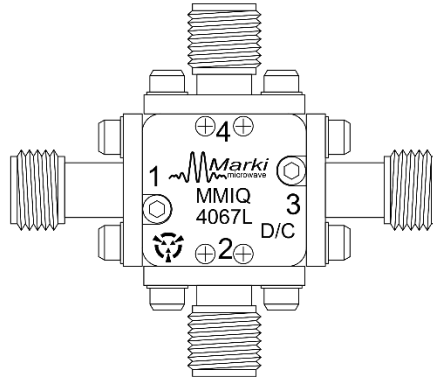

2.2 Port Functions

Port	Function	Description	Equivalent Circuit
Port 3	RF Input/Output	Port 1 is DC open and AC matched to 50Ω over the specified RF frequency range.	P1 
Port 1	LO Input	Port 2 is DC open and AC matched to 50Ω over the specified LO frequency range.	P2 
Port 2	I Input / Output	Port 3 is diode coupled and AC matched to 50Ω over the specified I port frequency range.	P3 
Port 4	Q Input / Output	Port 4 is diode coupled and AC matched to 50Ω over the specified Q port frequency range.	P4 
GND	Ground	U package ground path is provided through the metal housing and outer coax conductor.	GND 

3. Specifications

3.1 Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Units
Port 2 DC Current	50	mA
Port 4 DC Current	50	mA
Power Handling, at any Port	+26	dBm
Operating Temperature	-55 to +100	°C
Storage Temperature	-65 to +125	°C

3.2 Package Information

Parameter	Details	Rating
ESD	Human Body Model (HBM), per MIL-STD-750, Method 1020	TBD
Weight	U package	14.5 g

3.3 Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

	Min	Nominal	Max	Units
T _A , Ambient Temperature	-55	+25	+100	°C
LO drive power	+11	+15	+20	dBm
RF/IF input power			+6	dBm

3.4 Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode mixer that requires no DC bias.

3.5 Electrical Specifications

The electrical specifications apply at $T_A=+25^{\circ}\text{C}$ in a 50Ω system. Typical data shown is for a down conversion application with a $+15\text{dBm}$ sine wave LO input.

Min and Max limits apply only to our connectorized units and are guaranteed at $T_A=+25^{\circ}\text{C}$. All bare die are 100% DC tested and visually inspected.

Parameter	Test Conditions	Min	Typical	Max	Units
RF (Port 3) Frequency Range		40		67	GHz
LO (Port 1) Frequency Range		40		67	
I (Port 2) Frequency Range		0		20	
Q (Port 4) Frequency Range		0		20	
Conversion Loss (CL) ²	RF/LO = 40 - 67 GHz I = DC - 0.2 GHz		12		dB
	RF/LO = 40 - 67 GHz I = 0.2 - 20 GHz		14		
	RF/LO = 40 - 67 GHz Q = DC - 0.2 GHz		12		
	RF/LO = 40 - 67 GHz Q = 0.2 - 20 GHz		14		
Noise Figure (NF) ³	RF/LO = 40 - 67 GHz I = DC - 0.2 GHz		12		dB
	RF/LO = 40 - 67 GHz Q = DC - 0.2 GHz		12		
Image Rejection (IR) ⁴	RF/LO = 40 - 67 GHz I+Q = DC - 0.2 GHz		35		dBc
Isolation	LO to RF		33		dB
	LO to IF		40		
	RF to IF		37		
Input IP3 (IIP3) ⁵	I+Q		19		dBm


² Measured as an I/Q down converter. (i.e., I and Q powers are not combined)

³ Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.









⁴ Image Rejection and Single sideband performance plots are defined by the upper sideband (USB) or lower sideband (LSB) with respect to the LO signal. Plots are defined by which sideband is selected by the external IF quadrature hybrid.



⁵ Typical IIP3 measured with I and Q ports combined with an external quadrature hybrid coupler.

3.6 Typical Performance Plots⁶

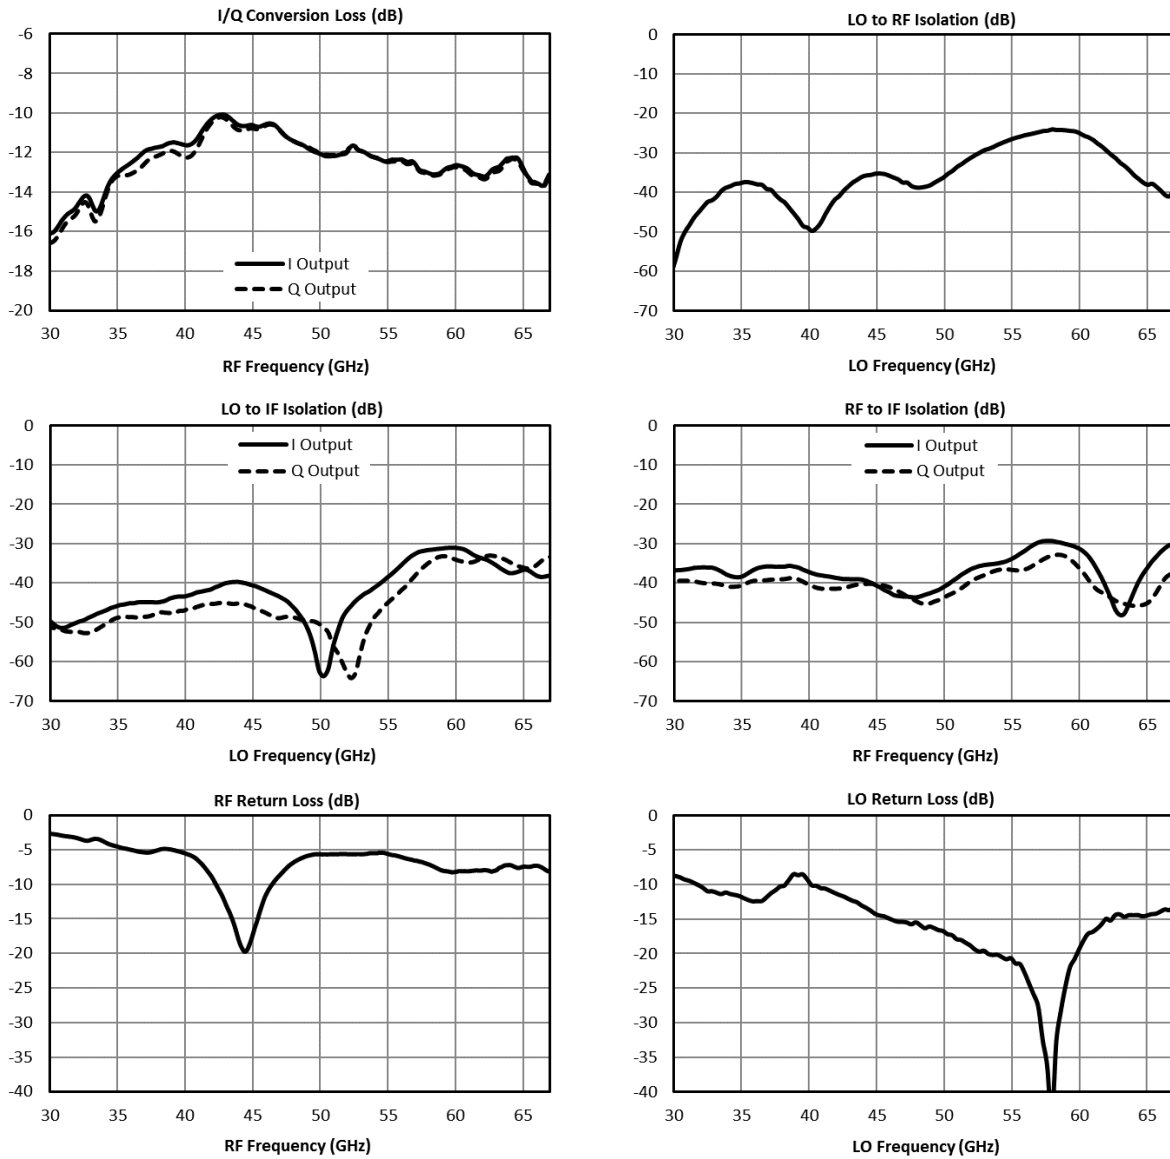


⁶ I output means that the IF output signal is measured at the I port of the mixer and the Q port is loaded. Q output means the IF output signal is measured at the Q port of the mixer while the I port is loaded.

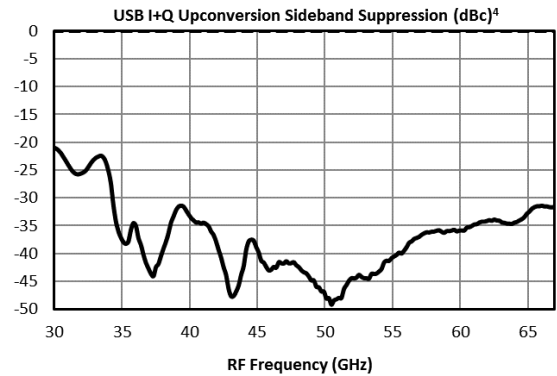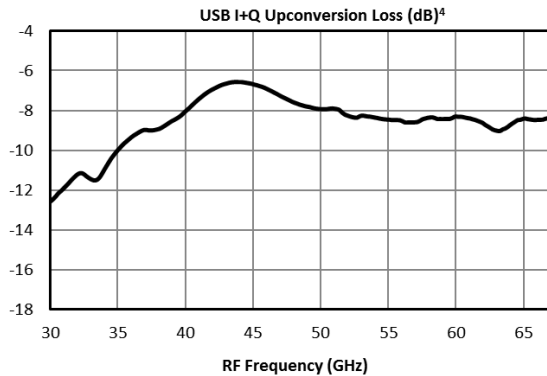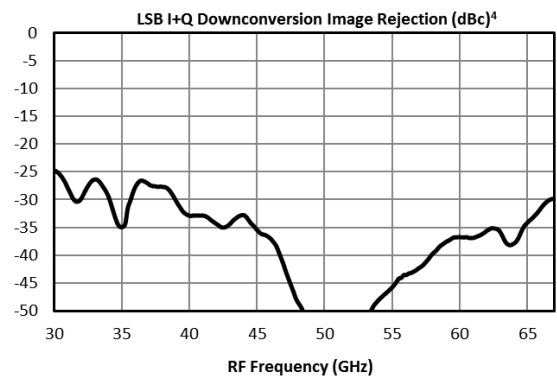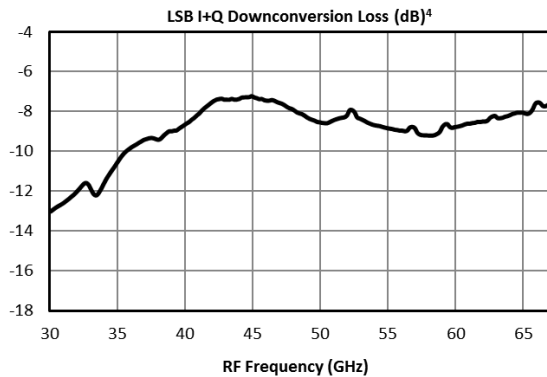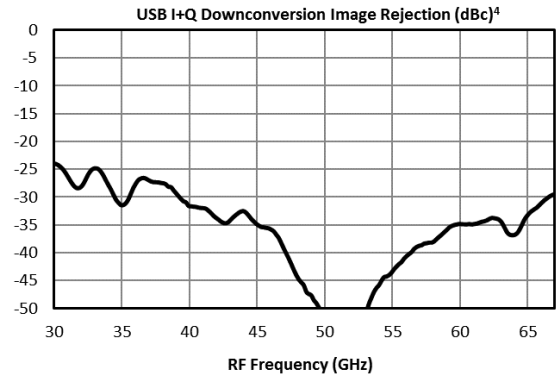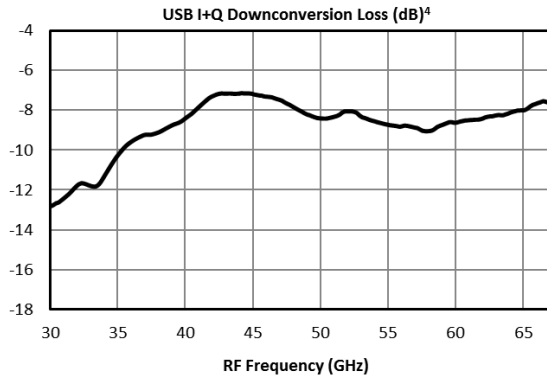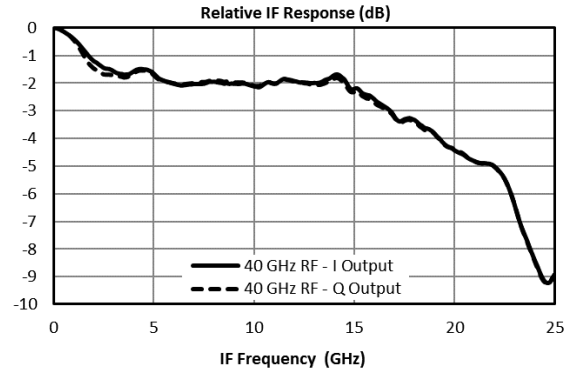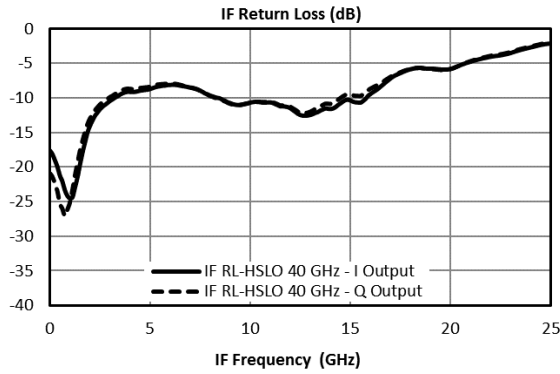

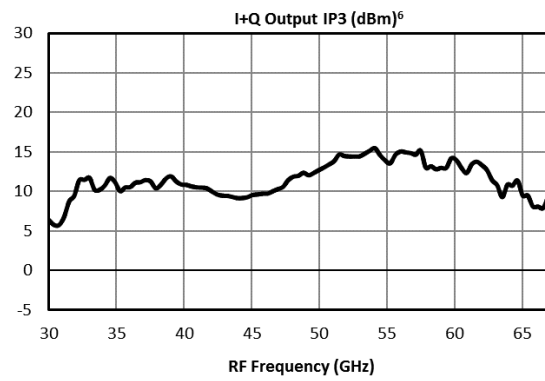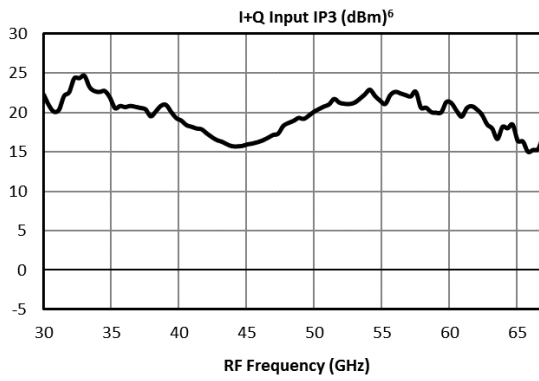

4. Mechanical Data

4.1 U Package Outline Drawing

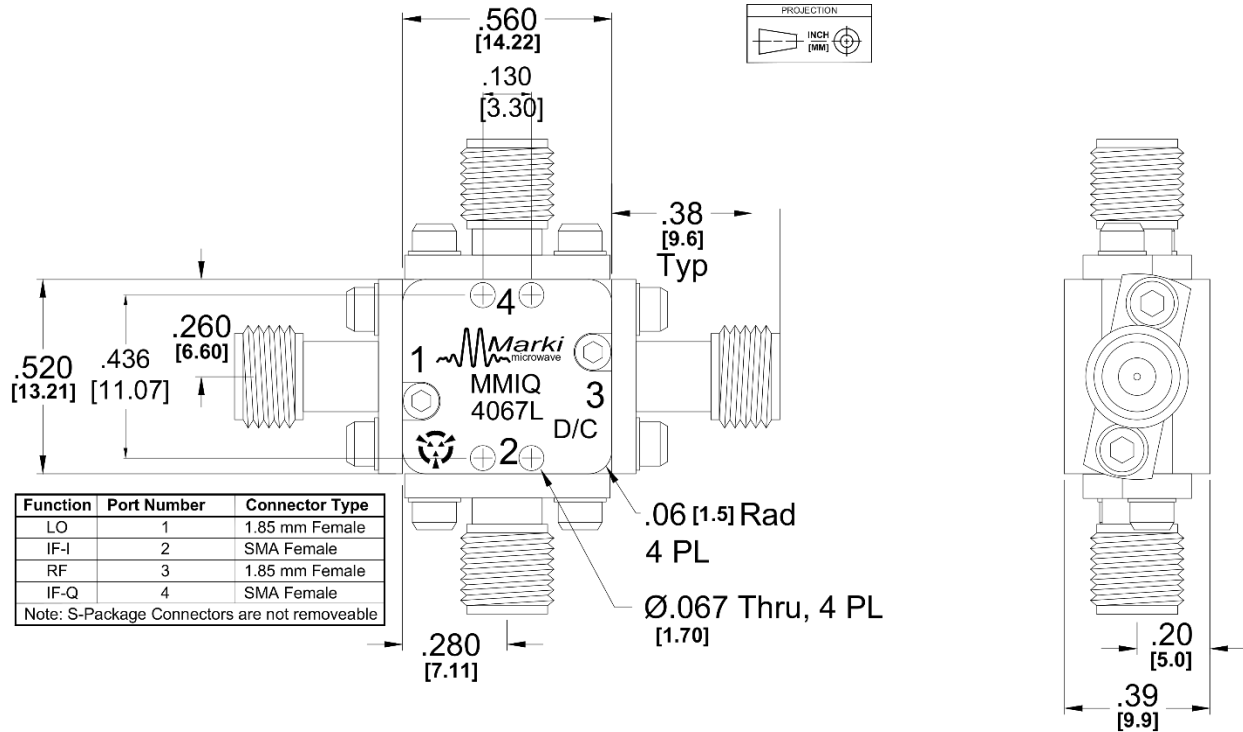

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice.

Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.