



TWO-TONE-TERMINATOR MIXER

The T3-0218 is a high performance mixer featuring LO/RF from 2 to 18 GHz and IF from 1 MHz to 6 GHz. As with all T3 mixers, this mixer offers unparalleled nonlinear performance in terms of IIP3, P_{1dB} , and spurious performance with a flexible LO drive requirement from +15 dBm to +27 dBm. The T3-0218 is offered in connectorized, surface mount, and drop-in style packaging, suitable for any type of system level integration.

T3-0218

NOTE: This product is not recommended for new designs. [Please see this letter for more information.](#)



Features

- Ultra-Broadband RF, LO, and IF
- Compatible with Sine or Square-Wave LO
- Square-Wave LO delivers Industry-Leading Spurious, IP3, and P_{1dB} Performance
- Application Note: [T3 Mixer Primer](#)
- Recommended Surface Mount Amplifiers: [ADM-0026-5929SM](#), [ADM-0126-5835SM](#), [ADM-0012-5931SM](#), [ADM-0026-5931SM](#)
- Recommended Amplifier Modules: [ADM1-0026PA](#), ADM2-0026PA

Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50Ω system.

Parameter	LO (GHz)	RF (GHz)	IF (GHz)	Min	Typ	Max	Diode Option LO drive level (dBm)
Conversion Loss (dB)	2-18	2-18	.001-1		7.0	10.0	
	2-18	2-18	.001-6		7.0	12.5	
Isolation (dB)	2-18	2-18		15	See Plots		
	2-18	2-18		18			
	2-18	2-18					
Input 1 dB Compression (dBm)	2-18	2-18			See Plot		L (+15 to +25)
Input Two-Tone Third Order Intercept Point (dBm)	2-18	2-18			See Plots		L (+15 to +25)

Part Number Options

Please specify diode level and package style by adding to model number.							
Package Options			Examples				
Connectorized	P		T3-0218LP				
Package Options Not Recommended for New Designs			Examples				
Microstrip ^{1,2,3}	E		<u>T3-0218</u>	<u>L</u>	<u>E</u>	<u>-2</u>	
Surface Mount ^{1,2,3}	EZ		(Model)	(Diode Option)	(Package)	(I-Port Configuration)	

¹Connectorized test fixtures available for most microstrip and surface mount packages. Consult factory.

²For non-connectorized packages, specify I-port configuration by adding -1 or -2 suffix to model number. Default is -2 configuration when not specified.

³EZ/E packages are offered in support of designed in projects only. Expected obsolescence date is 2017. For new designs consult the [MMIC and Microlithic Mixer](#) catalog.









TWO-TONE-TERMINATOR MIXER



T3-0218

Page 2

**LO/RF 2 to 18 GHz
IF 1 MHz to 6 GHz**

Typical Performance

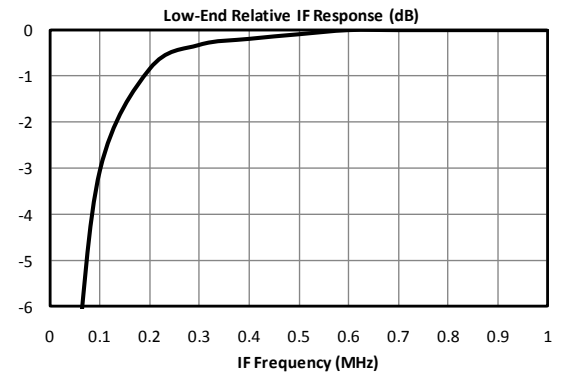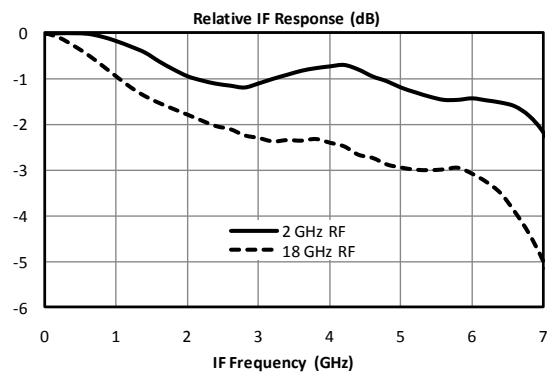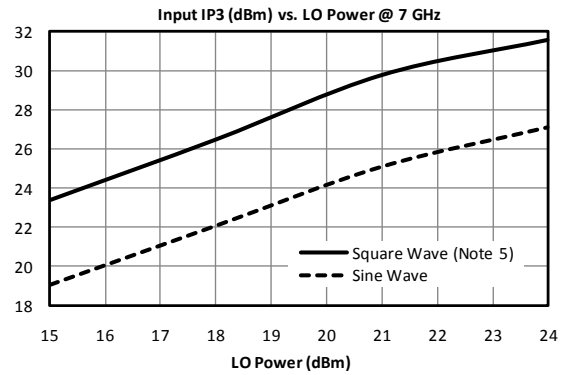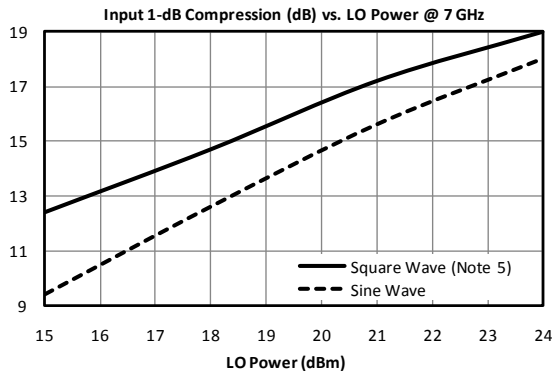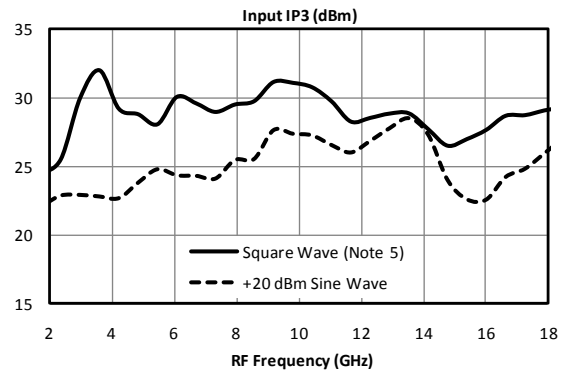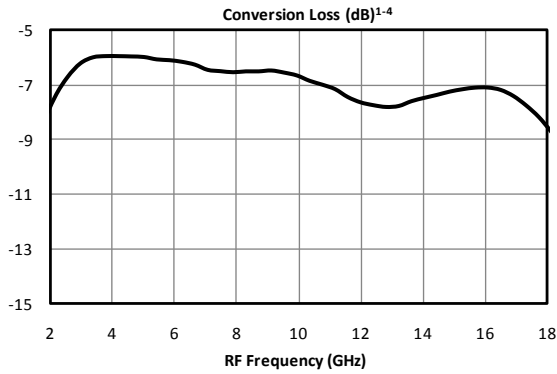

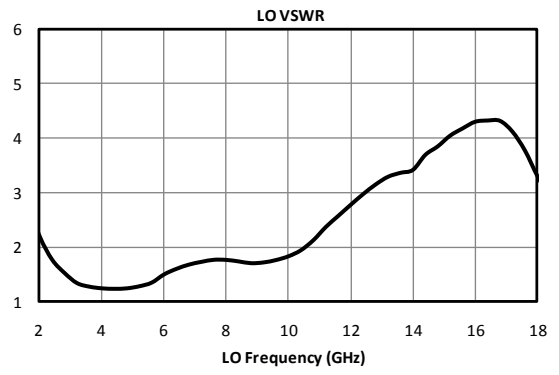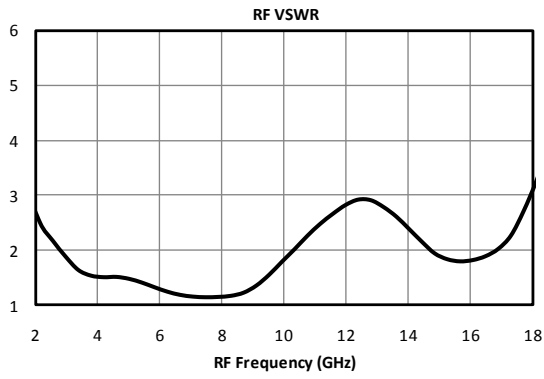





TWO-TONE-TERMINATOR MIXER





T3-0218

Page 3

LO/RF 2 to 18 GHz
IF 1 MHz to 6 GHz

Typical Performance

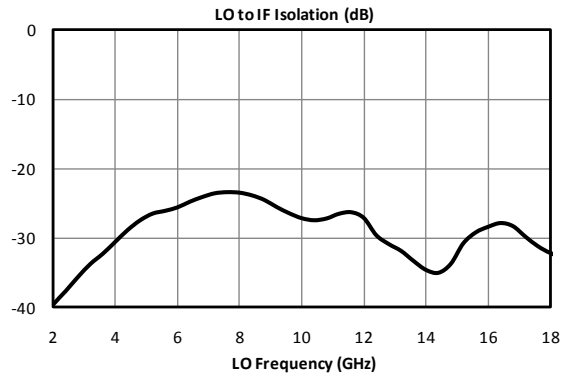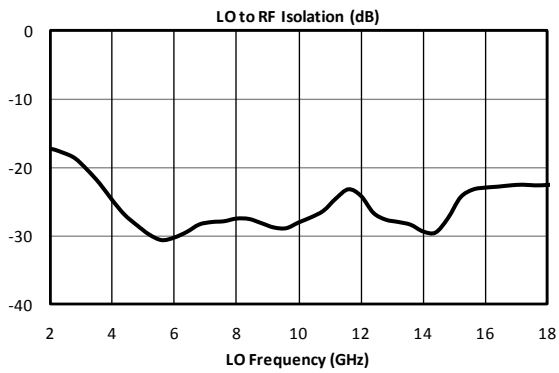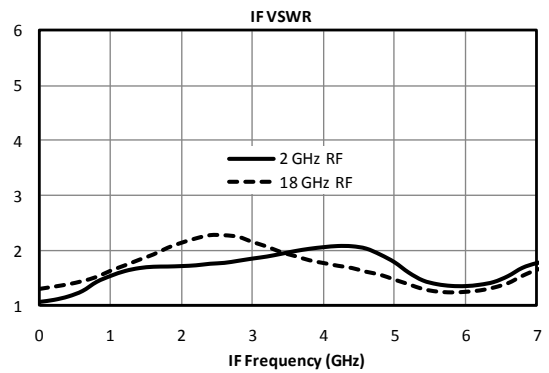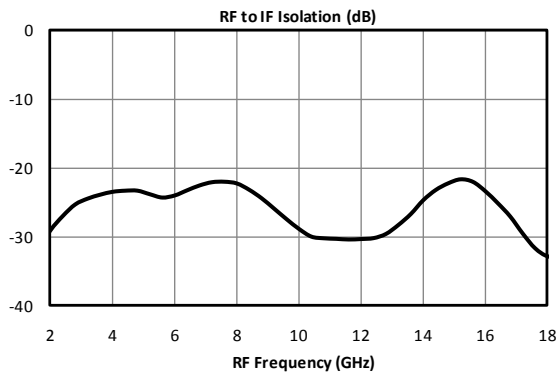

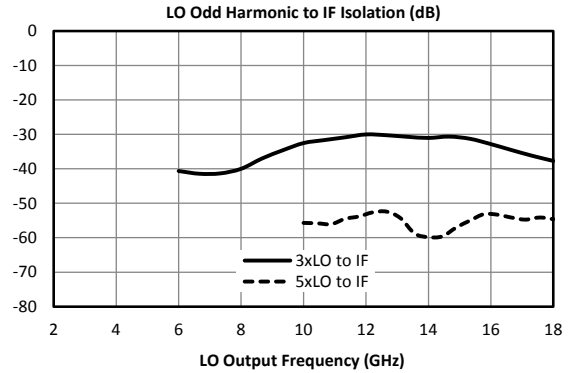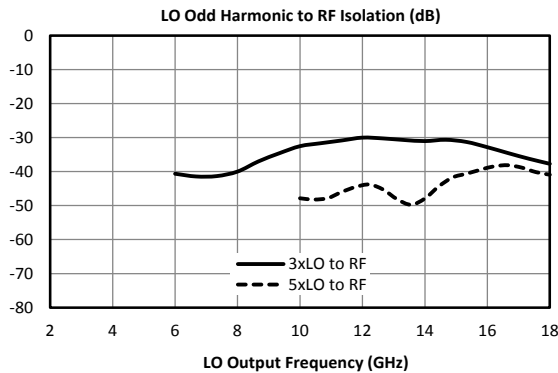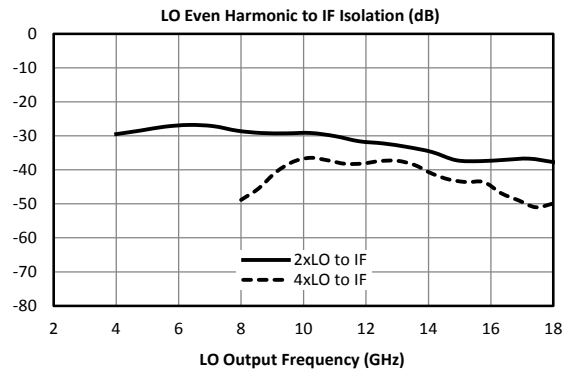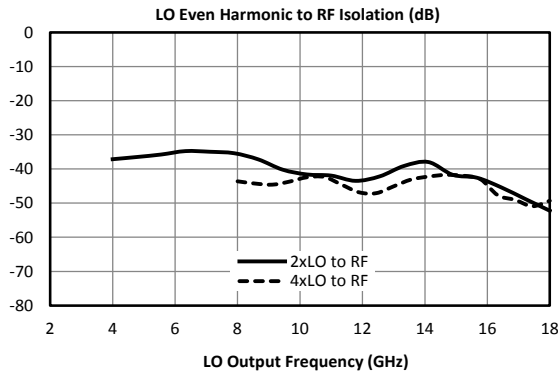

TWO-TONE-TERMINATOR MIXER

T3-0218

Page 4

LO/RF 2 to 18 GHz
IF 1 MHz to 6 GHz

Downconversion Spurious Suppression


Spurious data is taken by selecting RF and LO frequencies ($\pm mLO \pm nRF$) within the 2 to 18 GHz RF/LO bands, which create a 100 MHz IF spurious output. The mixer is swept across the full spurious band and the mean is calculated. The numbers shown in the table below are for a -10 dBm RF input. Spurious suppression is scaled for different RF power levels by $(n-1)$, where "n" is the RF spur order. For example, the $2RF \times 2LO$ spur is 65 dBc for a -10 dBm input, so a -20 dBm RF input creates a spur that is $(2-1) \times (-10 \text{ dB})$ dB lower, or 75 dBc.

Typical Downconversion Spurious Suppression (dBc): Square Wave (Sine Wave) LO⁵

-10 dBm RF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
0xRF	-----	See LO to IF Isolation and LO Harmonic to IF Isolation Plots (Page 3)				
1xRF	19 (19)	Reference	20 (33)	11 (11)	20 (34)	18 (18)
2xRF	65 (65)	73 (68)	65 (59)	73 (67)	70 (55)	70 (64)
3xRF	97 (102)	90 (78)	98 (92)	92 (76)	95 (86)	93 (73)
4xRF	>110	>110	>110	>110	>110	>110
5xRF	>120	>120	>120	>120	>120	>120

A sample downconversion spurious sweep is shown below. An LO which is 100 MHz higher than the RF is used to create a 100 MHz reference IF. A second LO is used to create a 2x2 spurious IF, also at 100 MHz (50 MHz fundamental

IF). The difference between these two output levels is the spurious suppression in dBc. The mean value across the full 2 to 18 GHz RF input band is the number shown in the table above.

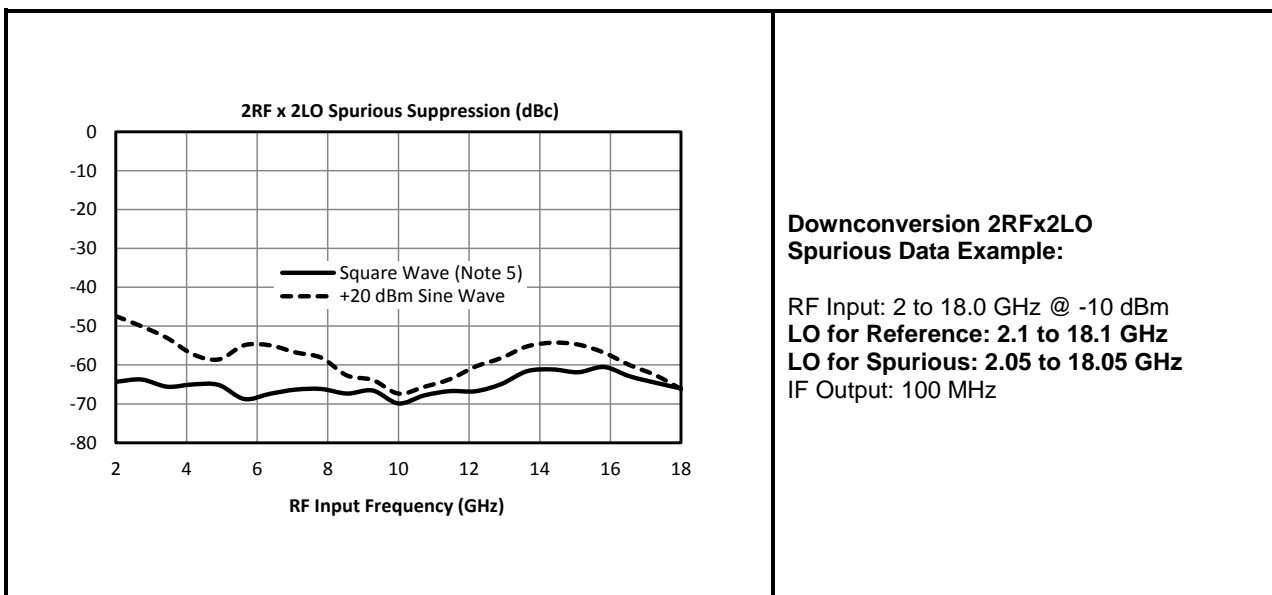

Downconversion 2RFx2LO Spurious Data Example:

RF Input: 2 to 18.0 GHz @ -10 dBm
 LO for Reference: 2.1 to 18.1 GHz
 LO for Spurious: 2.05 to 18.05 GHz
 IF Output: 100 MHz



TWO-TONE-TERMINATOR MIXER

T3-0218

Page 5

**LO/RF 2 to 18 GHz
 IF 1 MHz to 6 GHz**

Upconversion Spurious Suppression


Spurious data is taken by mixing a 100 MHz IF with LO frequencies ($\pm mLO \pm nIF$), which creates an RF within the 2 to 18 GHz RF band. The mixer is swept across the full spurious output band and the mean is calculated. The numbers shown in the table below are for a -10 dBm IF input. Spurious suppression is scaled for different IF input power levels by $(n-1)$, where "n" is the IF spur order. For example, the 2IFx1LO spur is typically 62 dBc for a -10 dBm input, so a -20 dBm IF input creates a spur that is $(2-1) \times (-10 \text{ dB})$ dB lower, or 72 dBc.

Typical Upconversion Spurious Suppression (dBc): Square Wave (Sine Wave) LO⁵

-10 dBm IF Input	0xLO	1xLO	2xLO	3xLO	4xLO	5xLO
0xIF	-----	See LO to RF Isolation and LO Harmonic to RF Isolation Plots (Page 3)				
1xIF	18 (20)	Reference	18 (29)	11 (11)	17 (26)	17 (15)
2xIF	68 (67)	62 (59)	70 (65)	67 (58)	67 (62)	60 (52)
3xIF	93 (92)	93 (82)	95 (95)	93 (80)	90 (86)	85 (70)
4xIF	>110	>110	>110	>110	>110	>110
5xIF	>120	>120	>120	>120	>120	>120

A sample upconversion spurious sweep is shown below. A 100 MHz reference IF input is used to create an RF output that is 100 MHz below the LO input ($LO-IF=RF$). A second LO (100 MHz higher) is combined with the same 100 MHz IF

input ($LO - 2 \times IF = RF$) to create the same 2 to 18 GHz RF output band. The difference between these two output levels is the spurious suppression in dBc. The mean value across the full RF output band is the number shown in the table above.

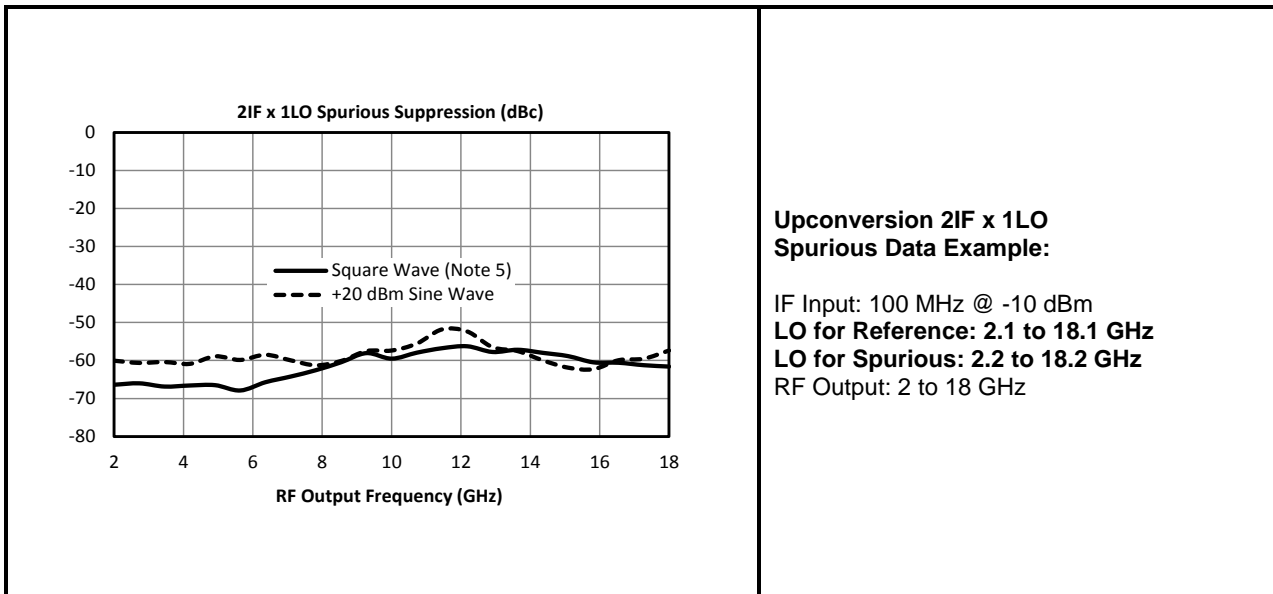


TWO-TONE-TERMINATOR MIXER

T3-0218

Page 6

LO/RF 2 to 18 GHz
 IF 1 MHz to 6 GHz

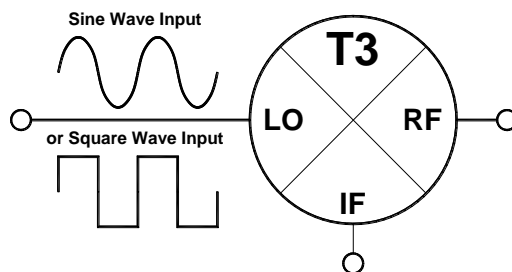

Port	Description	DC Interface Schematic
LO	The LO port is DC short to ground and AC matched to 50 Ohms from 2 to 18 GHz. Blocking capacitor is optional.	
RF	The RF port is DC short to ground and AC matched to 50 Ohms from 2 to 18 GHz. Blocking capacitor is optional.	
IF	The IF port is DC blocked and AC matched to 50 Ohms from 1 MHz to 6 GHz.	

Absolute Maximum Ratings	
Parameter	Maximum Rating
RF DC Current	1 Amp

LO DC Current	1 Amp
RF Power Handling (RF+LO)	+25 dBm (L-Version) +27 dBm (M-Version)
Operating Temperature	-55°C to +100°C
Storage Temperature	-65°C to +125°C
ESD Sensitivity (HBM)	Class 0

DATA SHEET NOTES:

1. Mixer Conversion Loss Plot IF frequency is 100 MHz.
2. Mixer Noise Figure typically measures within 0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
3. Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
4. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
5. Square Wave Drive created with an A0015, biased at + 6 Volts, with a +10 dBm input. Sine Wave data is taken with a +20 dBm LO input.
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com
www.markimicrowave.com