

BIAS TEE

BTN-0050

Features


- Input 40 kHz to 50 GHz
- Non-Resonant



Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

Parameter	Frequency Range	Min	Typ	Max
Insertion Loss (dB)	40 kHz to 50 GHz		1.7	2.2
DC Current (mA)				500
DC Port Isolation (dB)	40 kHz to 50 GHz		40	
DC Voltage Maximum (V)	40 kHz to 50 GHz			30
RF Power Maximum (W)	40 kHz to 50 GHz			1

Model Number	Description
BTN-0050	40 kHz to 50 GHz Bias Tee 2.40 mm connectors

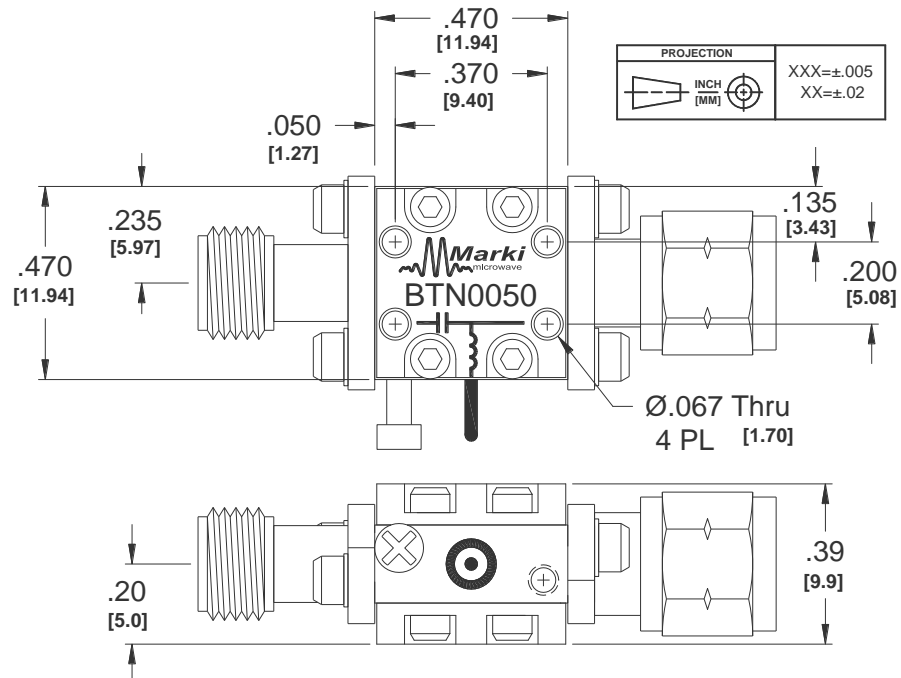

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.


BIAS TEE

Page 2

BTN-0050

Input 40 kHz to 50 GHz

Typical Performance

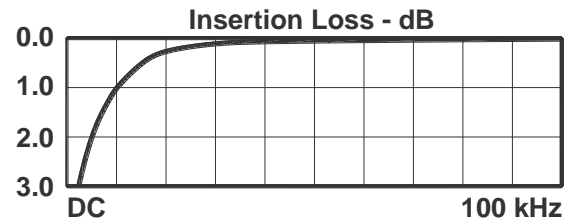

NOTE:

Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com