

LEAD-FREE / RoHS-COMPLIANT

DIRECTIONAL COUPLER

C09-0R430

The C09-0R430 is a broadband 0.45-30 GHz, 9 dB directional coupler. The multisection tri-plate stripline design exhibits excellent coupling flatness and VSWR at all ports. Custom designs are also available; contact the factory for details.

Features

- Ultra Broadband Performance
- Excellent Coupling Flatness
- High Directivity
- Low VSWR
- RoHS Compliant
- [Microwave Power Dividers & Couplers App Note](#)




Electrical Specifications

Parameter ¹	Frequency Range	Min	Typ	Max
Mean Coupling (dB)	450 MHz - 30 GHz		9	
Amplitude Flatness (dB) ²			±0.7	±1.4
Direct Line Insertion Loss (dB)	DC - 30 GHz		1.3	2.6
VSWR	DC - 18 GHz		1.15	1.45
	18 GHz - 30 GHz		1.3	1.8
Directivity (dB)	450 MHz - 18 GHz	15	20	
	18 GHz - 30 GHz	12	16	
Weight (g)			90	

¹Specifications guaranteed when operated in a 50Ω system.

²Deviation from average coupling.




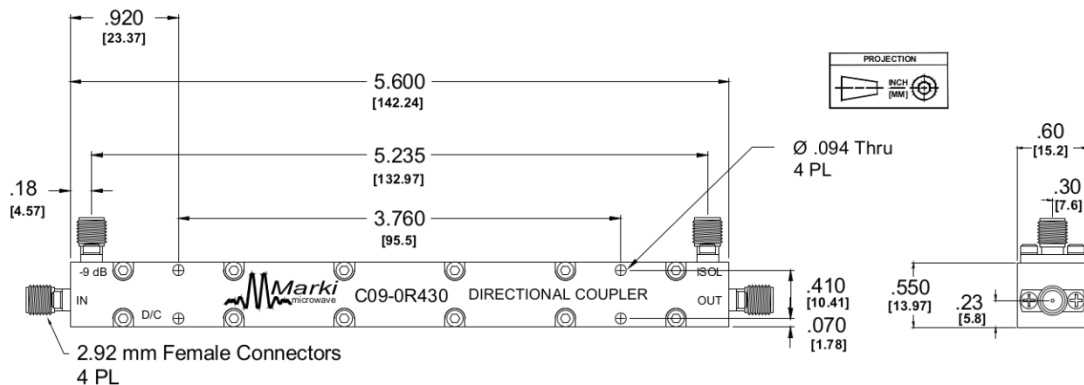


DIRECTIONAL COUPLER

C09-0R430

Page 2

Typical Performance

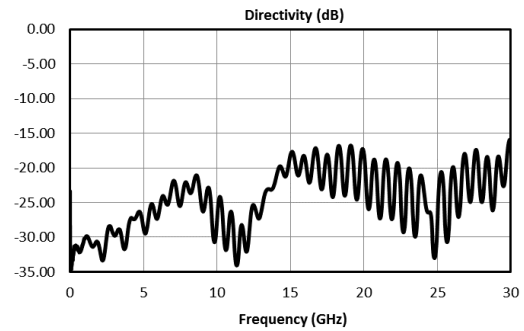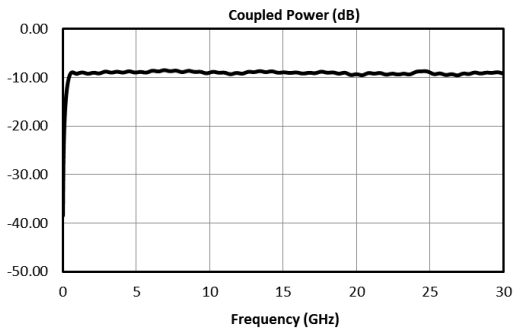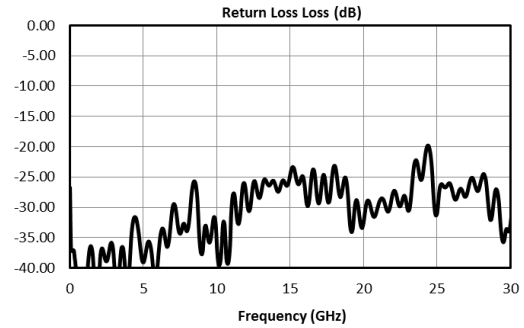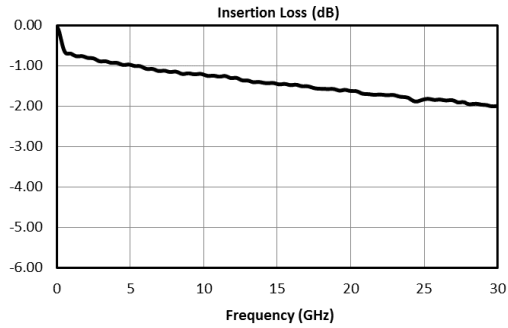

DIRECTIONAL COUPLER

C09-0R430

Page 3

Model Number	Description
C09-0R430	0.45-30 GHz, 9 dB Directional Coupler with 2.92mm connectors ¹ , LEAD-FREE/ROHS COMPLIANT

¹Default is 2.92mm female connectors. Consult factory for other connector options.

Revision History

Revision code	Revision Date	Comment
B	4/2020	Updated Direct Line IL specs

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.